


PREDICTION OF DYNAMIC LATERAL STABILITY CHARACTERISTICS

By

Sqn. Ldr. C. A. V. MURTHY



TH
AE/1973/M
M 969b

DEPARTMENT OF AERONAUTICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY KANPUR

AUGUST 1973

PREDICTION OF DYNAMIC LATERAL STABILITY CHARACTERISTICS


A Thesis Submitted
In Partial Fulfilment of the Requirements
for the Degree of
MASTER OF TECHNOLOGY




By
Sqn. Ldr. C. A. V. MURTHY

Therin
629.13236
M 969

AE-1973-M-MUR-PRE

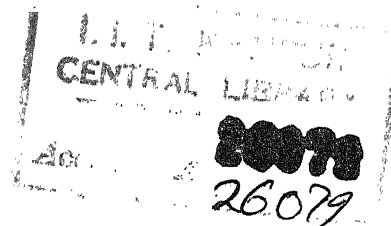

to the
DEPARTMENT OF AERONAUTICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY KANPUR
AUGUST 1973

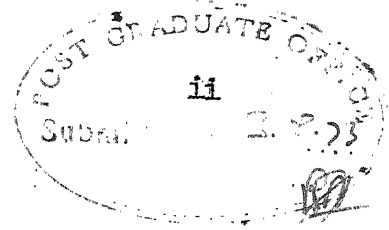

CERTIFICATE

Certified that this work entitled 'PREDICTION OF DYNAMIC LATERAL STABILITY CHARACTERISTICS' has been carried out under my supervision and that this has not been submitted elsewhere for a degree.

(T.M. Kutty)
Associate Professor
Department of Aeronautical Engineering
Indian Institute of Technology, Kanpur

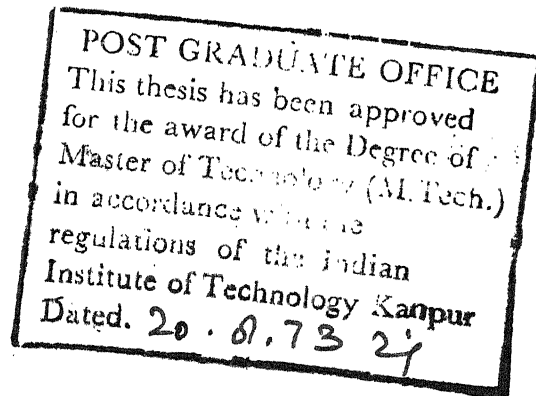


TABLE OF CONTENTS

	Page
LIST OF TABLES	v
LIST OF FIGURES	vi
LIST OF SYMBOLS	ix
SYNOPSIS	xvii
1. INTRODUCTION	1
2. EQUATIONS OF LATERAL MOTION OF AN AIRPLANE	3
3. ESTIMATION OF TIME HISTORY OF LATERAL MOTION	8
4. ESTIMATION OF LATERAL STABILITY DERIVATIVES	13
5. RESULTS AND DISCUSSION	48
6. CONCLUSION	54
LIST OF REFERENCES	57
APPENDIX 'A' - FLOW CHART OF SOLUTION OF EQUATIONS OF MOTION BY LAPLACE TRANSFORM METHOD.	58
APPENDIX 'B' - SPECIAL NOTATIONS USED IN SECTION 3.	71
APPENDIX 'C' - DIGITAL COMPUTER PROGRAMME LISTING FOR SOLUTION OF LATERAL EQUATIONS OF MOTION BY LAPLACE TRANSFORM METHOD	74
APPENDIX 'D' - FLOW CHART OF SOLUTION OF LATERAL EQUATIONS OF MOTION BY FOURTH ORDER RUNGE- KUTTA METHOD	89

APPENDIX 'E' - DIGITAL COMPUTER PROGRAMME	96
LISTING FOR SOLUTION OF LATERAL EQUATIONS OF MOTION BY FOURTH ORDER RUNGE-KUTTA METHOD	
APPENDIX 'F' - TYPICAL INPUT/OUTPUT	106
APPENDIX 'G' - PLOTS OF SOLUTIONS	127
TABLES 1 TO 9	132
FIGURES 1 TO 30.	153

LIST OF TABLES

- Table 1 : Mass Characteristics of Cessna-182H.
- Table 2 : Variation of Fuselage Cross-sectional Area Along Body Centre-line.
- Table 3 : Geometric Characteristics and Other Related Constants for Cessna-182H.
- Table 4 : Flight Conditions and Allied Parameters.
- Table 5 : Parameters Dependent on Flight Conditions.
- Table 6 : Comparison of Contribution of Various Components to Stability Derivatives Estimated from References 1 to 5.
- Table 7 : Comparison of Estimated and Available Values of Stability Derivatives.
- Table 8 : A Consolidated List of Estimated and Available Values of Stability Derivatives.
- Table 9 : Period and Damping Characteristics.

LIST OF FIGURES

- Fig 1 : Cessna 182-H Airplane.
- Fig 2 : System of Axes.
- Fig 3 : System of Axes and Angular Relationships in Flight.
- Fig 4 : Wing-Body Interference Factor for Wing-Body Side-Slip Derivative $C_{Y_{\beta}}$.
- Fig 5 : Variation of Fuselage Cross-sectional Area Along Body Centre-line.
- Fig 6 : Body Station Where Flow Becomes Viscous.
- Fig 7 : Empirical Factor for Estimating the Side-slip Derivative $C_{Y_{\beta_V}}$ for Single Vertical Tails.
- Fig 8 : Aspect Ratio Factor Due to Body Interference Used for Estimating the Side-slip Derivative $C_{Y_{\beta_V}}$ for Single Vertical Tails.
- Fig 9 : Aspect Ratio Factor Due to Horizontal Tail Interference Used for Estimating the Side-slip Derivative $C_{Y_{\beta_V}}$ for Single Vertical Tails.
- Fig 10 : Factor Accounting for Relative Size of Horizontal and Vertical Tails.
- Fig 11 : Wing Sweep Contribution to $C_{l_{\beta}}$.

- Fig 12 : Compressibility Correction Factor to Sweep Contribution to Wing C_{l_β} .
- Fig 13 : Fuselage Correction Factor.
- Fig 14 : Aspect Ratio Contribution to Wing C_{l_β} .
- Fig 15 : Effect of Uniform Geometric Dihedral on Wing C_{l_β} .
- Fig 16 : Compressibility Correction to Dihedral Effect on Wing C_{l_β} .
- Fig 17 : Effect of Wing Twist on Wing C_{l_β} .
- Fig 18 : Geometry for Determining the Location of the Vertical Tail Aerodynamic Centre in Relation to the Overall Airplane Centre of Gravity in Body Axes.
- Fig 19 : Empirical Factor K_N Related to Side-slip Derivative C_{n_β} for Body-plus-Wing-Body Interference.
- Fig 20 : Effect of Fuselage Reynolds Number on Wing-Body C_{n_β} .
- Fig 21 : Fuselage Directional Stability Coefficient.
- Fig 22 : Angle of Attack Changes Due to Roll-Rate p .
- Fig 23 : Roll Damping Parameter.
- Fig 24 : Variation of $\frac{(\Delta C_{n_p})_1}{C_L}$ and $\frac{(\Delta C_{n_p})_2}{(C_{D_0})_\alpha}$ with Aspect Ratio.

- Fig 25 : Effect of Wing Twist on Wing Rolling
Derivative C_{n_p} .
- Fig 26 : Wing Yawing Derivative C_{l_r} .
- Fig 27 : Effect of Wing Twist on Wing Yawing
Derivative C_{l_r} .
- Fig 28 : Low Speed Drag-due-to-Lift Yaw-Damping Parameter.
- Fig 29 : Low Speed Profile-Drag Yaw-Damping Parameter.
- Fig 30 : Required Damping of the Lateral-Directional
Oscillation.

LIST OF SYMBOLS

m	:	Mass of airplane, slugs.
S	:	Wing area, Sq.ft.
\bar{c}	:	Wing mean chord, ft.
l	:	Tail length (distance from centre of pressure of vertical tail to centre of gravity, measured parallel to longitudinal stability axis; values of l must be calculated for each angle of attack), ft.
b	:	Wing span, ft.
z	:	Height of centre of pressure of vertical tail above longitudinal stability axis; values of z must be calculated for each angle of attack, ft.
z_w	:	Vertical distance of quarter chord of wing root chord from fuselage centre line, positive downward, ft.
s	:	Non-dimensional time parameter based on span (Vt/b).
A	:	Aspect ratio.
t	:	Time, sec.
V	:	Airspeed, ft. per sec.
k_{x_0}	:	Radius of gyration about principal longitudinal axis of inertia, ft.

k_{Z_0}	:	Radius of gyration about principal normal axis of inertia, ft.
k_X	:	Radius of gyration about X-axis, ft. $(\sqrt{k_{X_0}^2 \cos^2 \eta + k_{Z_0}^2 \sin^2 \eta})$.
k_Z	:	Radius of gyration about Z-axis, ft. $(\sqrt{(k_{Z_0}^2 \cos^2 \eta + k_{X_0}^2 \sin^2 \eta)})$.
K_{X_0}	=	k_{X_0}/b
K_{Z_0}	=	k_{Z_0}/b
K_X	=	k_X/b
K_Z	=	k_Z/b
k_{XZ}	:	Product of inertia factor $((k_{Z_0}^2 - k_{X_0}^2) \sin \eta \cos \eta)$.
K_{XZ}	=	k_{XZ}/b^2
K_1	=	K_{XZ}/K_X^2
K_2	=	K_{XZ}/K_Z^2
η	:	Angle of attack of principal longitudinal axis of inertia, deg.
γ	:	Angle of climb or flight path angle, deg.

α	:	Angle of attack of longitudinal body axis, deg.
ϵ	:	Angle between principal longitudinal axis of inertia and longitudinal body axis, deg.
ρ	:	Air density, slugs per ft. ³
ϕ	:	Angle of bank, rad.
ψ	:	Angle of yaw, rad.
β	:	Angle of side-slip, rad.
β	:	$\sqrt{1-M^2}$
p	:	Rolling velocity, rad. per sec. $(\frac{d\phi}{dt})$.
r	:	Yawing velocity, rad. per sec. $(\frac{d\psi}{dt})$.
ϕ_0	:	Initial angle of bank, rad.
ψ_0	:	Initial angle of yaw, rad.
β_0	:	Initial angle of sideslip, rad.
$(D\phi)_0$:	Non-dimensional, initial rolling velocity, $(\frac{d\phi}{d\sigma})$.
$(D\psi)_0$:	Non-dimensional, initial yawing velocity, $(\frac{d\psi}{d\sigma})$.
R	:	Real part of $R+Ii$.
I	:	Imaginary part of $R+Ii$.
A, B, C, D, E	:	Coefficients of the characteristic biquadratic equation.

P_1, P_2, \dots, P_7	:	Factors of the B, C and D coefficients.
$\lambda_1, \lambda_2, \lambda_3, \lambda_4$	}	Roots of the characteristic equation.
D	:	Operator $d/d\sigma$
P	:	Period of lateral oscillations, sec.
$T_{1/2}$:	Time to damp to one-half amplitude, sec.
τ	:	Time conversion factor ($m/\rho S V$).
σ	:	Non-dimensional time factor (t/τ).
μ	:	Relative density factor ($m/\rho S b$).
L_c	:	Impressed rolling moment, ft.lbs.
N_c	:	Impressed yawing moment, ft.lbs.
Y_c	:	Impressed lateral force, lbs.
C_{l_c}	:	Impressed rolling-moment coefficient.
C_{n_c}	:	Impressed yawing-moment coefficient.
C_{y_c}	:	Impressed lateral-force coefficient.
C_L	:	Lift coefficient (Lift/ qS).
C_D	:	Drag coefficient (Drag/ qS).
C_l	:	Rolling-moment coefficient (Rolling moment/ qSb).
C_n	:	Yawing-moment coefficient (Yawing moment/ qSb).
C_Y	:	Lateral-force coefficient (Lateral force/ qS).
q	:	Dynamic pressure lb./sq.ft. ($1/2 \rho V^2$).

$$C_{l\beta} = \partial C_l / \partial \beta$$

$$C_{n\beta} = \partial C_n / \partial \beta$$

$$C_{Y\beta} = \partial C_Y / \partial \beta$$

$$C_{lp} = \partial C_l / \partial \left(\frac{pb}{2V} \right)$$

$$C_{np} = \partial C_n / \partial \left(\frac{pb}{2V} \right)$$

$$C_{Yp} = \partial C_Y / \partial \left(\frac{pb}{2V} \right)$$

$$C_{lr} = \partial C_l / \partial \left(\frac{rb}{2V} \right)$$

$$C_{nr} = \partial C_n / \partial \left(\frac{rb}{2V} \right)$$

$$C_{Yr} = \partial C_Y / \partial \left(\frac{rb}{2V} \right)$$

$$l_\beta = \mu C_{l\beta} / 2K_X^2$$

$$n_\beta = \mu C_{n\beta} / 2K_Z^2$$

$$y_\beta = C_{Y\beta} / 2$$

$$l_p = C_{lp} / 4K_X^2$$

$$n_p = C_{np} / 4K_Z^2$$

$$y_p = C_{Yp} / 4\mu$$

l_r	=	$c_{l_r} / 4K_X^2$
n_r	=	$c_{n_r} / 4K_Z^2$
y_r	=	$c_{Y_r} / 4\mu$
l_c	=	$\mu c_{l_c} / 2K_X^2$
n_c	=	$\mu c_{n_c} / 2K_Z^2$
y_c	=	$c_{Y_c} / 2$
l_V	:	Distance of vertical tail M.A.C. from centre of gravity measured along body centre line (body axis), ft.
h	:	Maximum fuselage height, ft.
w	:	Maximum fuselage width, ft.
z_H	:	Vertical distance from horizontal tail to base of vertical tail, ft.
z_V	:	Height of vertical tail M.A.C. above body centre line (body axis).
Λ	:	Sweep back angle of leading edge, deg.
$\Lambda_{c/4}$:	Sweep back angle of quarter-chord line, deg.
$\Lambda_{c/2}$:	Sweep back angle of mid-chord line, deg.
λ	:	Taper ratio.
Γ	:	Geometric dihedral, deg.

$$C_{L_\alpha} = \partial C_L / \partial \alpha$$

$$\bar{C}_{D_0} = C_D - C_L^2 / \pi A$$

$$(\bar{C}_{D_0})_\alpha = \partial / \partial \alpha (C_D - C_L^2 / \pi A)$$

M : Mach number

d : Maximum body height at wing-body intersection.

$$B = \sqrt{1 - M^2 \cos^2 \Lambda} / c/4$$

\mathcal{K} : Ratio of actual wing/tail section lift-curve-slope to 2π

K_H : Correction factor for horizontal tail position.

\bar{X} : Distance from the leading edge of the wing M.A.C. to the airplane C.G.

Subscripts

T : Tip

R : Root

LE : Leading edge

c/4 : Quarter-chord

c/2 : Mid-chord

W : Wing

WB : Wing-plus-body

H : Horizontal tail

HB : Horizontal tail-plus-body

V : Vertical tail

eff : effective

av : average

(Note : Other symbols, when used, have been
explained in the text)

SYNOPSIS

Sqn. Ldr. C.A.V. Murthy, M.Tech., Aero.
Indian Institute of Technology, Kanpur
August, 1973
PREDICTION OF DYNAMIC LATERAL STABILITY
CHARACTERISTICS

✓ The equations of Lateral-Directional motion of an airplane for the stick-fixed case are developed in terms of the mass, geometric and flight parameters.

The coefficients in these equations are functions of the lateral stability derivatives. Several methods of estimation of these derivatives and their values estimated by these methods are presented. ✓

Computer programmes have been developed for estimating the time history of important airplane lateral motion parameters.

A sample case, based on the Cessna-182 single-engined airplane, has been worked out in detail, covering the estimation of the stability derivatives and the prediction of the airplane motion in response to a disturbance, by solution of the lateral equations of motion.

1. INTRODUCTION

The calculation of the stick-fixed lateral dynamic characteristics of an airplane requires the solution of the lateral equations of motion. These are a set of three coupled, simultaneous, second order differential equations. The unknown parameters are, the angles of sideslip, roll and yaw and rates of roll and yaw. The coefficients in these equations contain stability derivatives and are functions of the airplane's mass, geometric and flight parameters.

Two methods of solution of the equations of motion are considered. These are, the Laplace Transform method (Appendices A, B and C) and the fourth-order Runge-Kutta method (Appendices D and E).

The Laplace Transform method has the following advantages:-

- (a) It provides the roots of the stability quartic.
- (b) The period and damping of various modes of lateral motion can be calculated.
- (c) It permits calculation of the free motion following any initial conditions, as well as, motion following application of external forces and moments.
- (d) It is very useful in further analysis such as frequency response studies by Bode plots etc.

1. INTRODUCTION

The calculation of the stick-fixed lateral dynamic characteristics of an airplane requires the solution of the lateral equations of motion. These are a set of three coupled, simultaneous, second order differential equations. The unknown parameters are, the angles of sideslip, roll and yaw and rates of roll and yaw. The coefficients in these equations contain stability derivatives and are functions of the airplane's mass, geometric and flight parameters.

Two methods of solution of the equations of motion are considered. These are, the Laplace Transform method (Appendices A, B and C) and the fourth-order Runge-Kutta method (Appendices D and E).

The Laplace Transform method has the following advantages:-

- (a) It provides the roots of the stability quartic.
- (b) The period and damping of various modes of lateral motion can be calculated.
- (c) It permits calculation of the free motion following any initial conditions, as well as, motion following application of external forces and moments.
- (d) It is very useful in further analysis such as frequency response studies by Bode plots etc.

Solution obtained by Runge-Kutta method provides only the time history of the unknown parameters. This method was considered for its simplicity and for comparison with the results of the Laplace Transform method.

Several methods of estimation of lateral stability derivatives are available. These are presented and discussed.

It was considered very important to take up a sample case and make a complete analysis. Cessna-182 (Fig.1(a),(b) and (c)) was chosen for this purpose because of the availability of this model in the Department and the possibility of someone else pursuing this programme by obtaining flight data for correlation with the data estimated in the report.

The motion of the airplane as calculated here is in the form of time history of angles of sideslip, roll and yaw and rates of roll and yaw following any initial conditions.

The results can, by proper modification of the programme, be extended to calculate motion resulting from impressed forces and moments which are functions of time.

All the forces and moments in the text are referred to stability system of axes which are defined in Figs.2 and 3.

Typical input/output for the solution of lateral equations of motion and prediction of time history of angles of sideslip, roll and yaw and rates of roll and yaw are

2. EQUATIONS OF LATERAL MOTIONS OF AN AIRPLANE

2.1 The dimensional form of the equations of lateral motion (stick-fixed) are:

$$m k_X^2 \frac{d^2 \phi}{dt^2} - \frac{\partial L}{\partial p} \frac{d\phi}{dt} + m k_{XZ} \frac{d^2 \psi}{dt^2} - \frac{\partial L}{\partial r} \frac{d\psi}{dt} - \frac{\partial L}{\partial v} v - L_c = 0 \quad (2.1)$$

$$m k_{XZ} \frac{d^2 \phi}{dt^2} - \frac{\partial N}{\partial p} \frac{d\phi}{dt} + m k_Z^2 \frac{d^2 \psi}{dt^2} - \frac{\partial N}{\partial r} \frac{d\psi}{dt} - \frac{\partial N}{\partial v} v - N_c = 0 \quad (2.2)$$

$$\begin{aligned} - \frac{\partial Y}{\partial p} \frac{d\phi}{dt} - (\text{Lift}) \phi + m v \frac{d\psi}{dt} - \frac{\partial Y}{\partial r} \frac{d\psi}{dt} - (\text{Lift})(\tan \gamma) \psi \\ + m \frac{dv}{dt} - \frac{\partial Y}{\partial v} v - Y_c = 0 \end{aligned} \quad (2.3)$$

Dividing equations (2.1) and (2.2) by $\frac{1}{2} \rho V^2 S b$ and (2.3) by $\frac{1}{2} \rho V^2 S$, the nondimensional form of equations are obtained.

$$\left. \begin{aligned} 2\mu k_X^2 \frac{d^2 \phi}{ds^2} - \frac{1}{2} c_{l_p} \frac{d\phi}{ds} + 2\mu k_{XZ} \frac{d^2 \psi}{ds^2} - \frac{1}{2} c_{l_r} \frac{d\psi}{ds} - c_{l_\beta} \beta - c_{l_c} &= 0 \\ 2\mu k_{XZ} \frac{d^2 \phi}{ds^2} - \frac{1}{2} c_{n_p} \frac{d\phi}{ds} + 2\mu k_Z^2 \frac{d^2 \psi}{ds^2} - \frac{1}{2} c_{n_r} \frac{d\psi}{ds} - c_{n_\beta} \beta - c_{n_c} &= 0 \\ - \frac{1}{2} c_{Y_p} \frac{d\phi}{ds} - c_L \phi + 2\mu \frac{d\psi}{ds} - \frac{1}{2} c_{Y_r} \frac{d\psi}{ds} - c_L \tan \gamma \cdot \psi + 2\mu \frac{d\beta}{ds} & \end{aligned} \right\}$$

where $s = \text{non-dimensional time } (\frac{Vt}{b})$.

Equations (2.4) are multiplied by $(m/f Sb)$, the relative density factor μ and are written in the following form

$$\left. \begin{aligned} (D^2 - l_p D) \phi + (K_1 D^2 - l_r D) \psi - l_\beta \beta - l_c &= 0 \\ (K_2 D^2 - n_p D) \phi + (D^2 - n_r D) \psi - n_\beta \beta - n_c &= 0 \\ (-y_p D - c_L/2) \phi + (D - y_r D - c_L/2 (\tan \psi)) \psi + (D - y_\beta) \beta - y_c &= 0 \end{aligned} \right\} \quad (2.5)$$

where $D = d/ds$ and the other coefficients are explained in the list of symbols.

2.2 Solution of Equations of Lateral Motion by Laplace

Transform Method:-

Taking Laplace transform of equations (2.5), we have, with the given initial conditions,

$$\left. \begin{aligned} (\lambda^3 - l_p \lambda^2) \phi_\lambda + (K_1 \lambda^3 - l_r \lambda^2) \psi_\lambda - l_\beta \lambda \beta_\lambda &= r_1 \\ (K_2 \lambda^3 - n_p \lambda^2) \phi_\lambda + (\lambda^3 - n_r \lambda^2) \psi_\lambda - n_\beta \lambda \beta_\lambda &= r_2 \\ (-y_p \lambda^2 - \frac{c_L}{2} \lambda) \phi_\lambda + \left[\lambda^2 - y_r \lambda^2 - \frac{c_L}{2} (\tan \psi) \lambda \right] \psi_\lambda \\ &+ (\lambda^2 - y_\beta \lambda) \beta_\lambda = r_3 \end{aligned} \right\} \quad (2.6)$$

$$\text{where } r_1 = (\lambda^2 - l_p \lambda) \phi_0 + (K_1 \lambda^2 - l_r \lambda) \psi_0$$

$$+ \lambda (D\phi)_0 + K_1 \lambda (D\psi)_0 + l_c$$

$$r_2 = (K_2 \lambda^2 - n_p \lambda) \phi_0 + (\lambda^2 - n_r \lambda) \psi_0$$

$$+ K_2 \lambda (D\phi)_0 + \lambda (D\psi)_0 + n_c$$

$$r_3 = -y_p \lambda \phi_0 + (\lambda - y_r \lambda) \psi_0 + \lambda \beta_0 - y_c$$

and $\mathcal{L}(\phi) \doteq \phi_\lambda$ etc.

Solving equations (2.6) ϕ_λ , ψ_λ and β_λ can be expressed as

$$\phi_\lambda = \frac{a_0 \lambda^5 + a_1 \lambda^4 + a_2 \lambda^3 + a_3 \lambda^2 + a_4 \lambda + a_5}{\lambda^2 (A \lambda^4 + B \lambda^3 + C \lambda^2 + D \lambda + E)} \quad (2.7)$$

$$\psi_\lambda = \frac{b_0 \lambda^5 + b_1 \lambda^4 + b_2 \lambda^3 + b_3 \lambda^2 + b_4 \lambda + b_5}{\lambda^2 (A \lambda^4 + B \lambda^3 + C \lambda^2 + D \lambda + E)} \quad (2.8)$$

$$\beta_\lambda = \frac{c_0 \lambda^4 + c_1 \lambda^3 + c_2 \lambda^2 + c_3 \lambda + c_4}{\lambda (A \lambda^4 + B \lambda^3 + C \lambda^2 + D \lambda + E)} \quad (2.9)$$

The coefficients a_0, \dots, a_5 , b_0, \dots, b_5 , c_0, \dots, c_4 and A, B, C, D and E which are the coefficients of the

characteristic equation,

$$A\lambda^4 + B\lambda^3 + C\lambda^2 + D\lambda + E = 0 \quad (2.10)$$

are functions of airplane mass ^{and} geometric ^{characteristic} and aerodynamic stability derivatives, and the expressions for these coefficients appear on p. ~~61-63~~ (Appendix A).

The expressions for ϕ , ψ and β can now be obtained by taking the inverse Laplace transform of equations (2.7) to (2.9).

Assuming that all roots λ_i of the characteristic equation are distinct, the inverse laplace transform gives

$$\phi = A_1 e^{\sigma \lambda_1} + A_2 e^{\sigma \lambda_2} + A_3 e^{\sigma \lambda_3} + A_4 e^{\sigma \lambda_4} + A_5 \sigma + A_6 \quad (2.11)$$

$$\psi = B_1 e^{\sigma \lambda_1} + B_2 e^{\sigma \lambda_2} + B_3 e^{\sigma \lambda_3} + B_4 e^{\sigma \lambda_4} + B_5 \sigma + B_6 \quad (2.12)$$

$$\beta = C_1 e^{\sigma \lambda_1} + C_2 e^{\sigma \lambda_2} + C_3 e^{\sigma \lambda_3} + C_4 e^{\sigma \lambda_4} + C_5 \quad (2.13)$$

and the expressions for rate of roll, p and rate of yaw, r , are obtained by differentiating equations (2.11) and (2.12) respectively.

$$p = \frac{1}{\tau} (A_1 \lambda_1 e^{\sigma \lambda_1} + A_2 \lambda_2 e^{\sigma \lambda_2} + A_3 \lambda_3 e^{\sigma \lambda_3} + A_4 \lambda_4 e^{\sigma \lambda_4} + A_5) \quad (2.14)$$

$$r = \frac{1}{\gamma} (B_1 \lambda_1 e^{\sigma' \lambda_1} + B_2 \lambda_2 e^{\sigma' \lambda_2} + B_3 \lambda_3 e^{\sigma' \lambda_3} + B_4 \lambda_4 e^{\sigma' \lambda_4} + B_5) \quad (2.15)$$

The expressions for the coefficients $\Lambda_1, \dots, \Lambda_6$, B_1, \dots, B_6 , C_1, \dots, C_5 appear on pp. 64 (Appendix A).

3. ESTIMATION OF TIME HISTORY OF LATERAL MOTION

3.1 The process of obtaining the lateral motions of an airplane can be divided into four stages.

Stage I: The values of the following parameters are to be determined/estimated:

- (a) Mass characteristics; m , k_{x_0} , k_{z_0} , η and ρ .
- (b) Geometric characteristics; Area S , span b etc.
- (c) Flight conditions; velocity V , lift coefficient C_L and flight path angle γ .
- (d) Aerodynamic Stability Derivatives.
 - i) Side-slip derivatives C_{l_β} , C_{n_β} , C_{Y_β}
 - ii) Roll-rate derivatives C_{l_p} , C_{n_p} , C_{Y_p}
 - iii) Yaw-rate derivatives C_{l_r} , C_{n_r} , C_{Y_r}

The methods by which these derivatives are estimated, are elaborated in the next section.

(e) In cases where impressed forces are used as disturbances, the values of factors C_{l_c} , C_{n_c} , C_{Y_c} appropriate to the particular problem are to be determined.

Stage II: From the above known quantities, the non-dimensional parameters as used in the calculation of motion are evaluated.

From these parameters, the coefficients A , B , C , D and E

Stage III: The roots of the above characteristic equation are then obtained. In the programme used, the method of reduction to cubic has been used.

Stage IV: The appropriate factors A_1, \dots, A_6 , B_1, \dots, B_6 , C_1, \dots, C_5 are evaluated. Some of these factors may be complex conjugate pairs depending on the nature of the roots λ_i of the characteristic equation. Accordingly the equations of motion are written as follows:

(a) All Roots Real

$$\left. \begin{aligned} \phi &= \sum_{i=1}^4 A_i e^{\sigma \lambda_i} + A_5 \sigma + A_6 \\ \psi &= \sum_{i=1}^4 B_i e^{\sigma \lambda_i} + B_5 \sigma + B_6 \\ \beta &= \sum_{i=1}^4 C_i e^{\sigma \lambda_i} + C_5 \\ p &= \frac{1}{\tau} \left[\sum_{i=1}^4 A_i \lambda_i e^{\sigma \lambda_i} + A_5 \right] \\ r &= \frac{1}{\tau} \left[\sum_{i=1}^4 B_i \lambda_i e^{\sigma \lambda_i} + B_5 \right] \end{aligned} \right\} \quad (3.1)$$

(b) One Complex Pair of Roots and Two Real Roots

$$\left. \begin{aligned} \lambda_1 &= R + iI \\ \lambda_2 &= R - iI \end{aligned} \right\} \quad \text{complex conjugate pair}$$

$$\left. \begin{aligned}
 \phi &= K_A e^{\sigma' R} \cos(\sigma' I + w_A) + A_3 e^{\sigma' \lambda_3} + A_4 e^{\sigma' \lambda_4} + A_5 \sigma' + A_6 \\
 \psi &= K_B e^{\sigma' R} \cos(\sigma' I + w_B) + B_3 e^{\sigma' \lambda_3} + B_4 e^{\sigma' \lambda_4} + B_5 \sigma' + B_6 \\
 \beta &= K_C e^{\sigma' R} \cos(\sigma' I + w_C) + C_3 e^{\sigma' \lambda_3} + C_4 e^{\sigma' \lambda_4} + C_5 \\
 p &= \frac{1}{\tau} \left[K_A \sqrt{R^2 + I^2} e^{\sigma' R} \cos(\sigma' I + w_A + \tan^{-1} \frac{I}{R}) \right. \\
 &\quad \left. + A_3 \lambda_3 e^{\sigma' \lambda_3} + A_4 \lambda_4 e^{\sigma' \lambda_4} + A_5 \right] \\
 r &= \frac{1}{\tau} \left[K_B \sqrt{R^2 + I^2} e^{\sigma' R} \cos(\sigma' I + w_B + \tan^{-1} \frac{I}{R}) \right. \\
 &\quad \left. + B_3 \lambda_3 e^{\sigma' \lambda_3} + B_4 \lambda_4 e^{\sigma' \lambda_4} + B_5 \right]
 \end{aligned} \right\} \quad (3.2)$$

where

$$\left. \begin{aligned}
 K_A &= 2\sqrt{R_A^2 + I_A^2} & ; & \quad w_A = \tan^{-1} \frac{I_A}{R_A} \\
 K_B &= 2\sqrt{R_B^2 + I_B^2} & ; & \quad w_B = \tan^{-1} \frac{I_B}{R_B} \\
 K_C &= 2\sqrt{R_C^2 + I_C^2} & ; & \quad w_C = \tan^{-1} \frac{I_C}{R_C} \\
 A_1 &= R_A + I_A i & ; & \quad A_2 = R_A - I_A i
 \end{aligned} \right\} \quad (3.3)$$

The steps to determine R_A and I_A have been shown in

(c) Two Pairs of Complex Roots:

$$\lambda_1, \lambda_2 = R \pm iI$$

$$\lambda_3, \lambda_4 = R' \pm iI'$$

$$\left. \begin{aligned} \phi &= K_A e^{\sigma R} \cos(\sigma I + w_A) + K'_A e^{\sigma R'} \cos(\sigma I' + w'_A) + A_5 \sigma + A_6 \\ \psi &= K_B e^{\sigma R} \cos(\sigma I + w_B) + K'_B e^{\sigma R'} \cos(\sigma I' + w'_B) + B_5 \sigma + B_6 \\ \beta &= K_C e^{\sigma R} \cos(\sigma I + w_C) + K'_C e^{\sigma R'} \cos(\sigma I' + w'_C) + C_5 \\ p &= \frac{1}{\tau} \left[K_A \sqrt{R^2 + I^2} e^{\sigma R} \cos\left(\sigma I + w_A + \tan^{-1} \frac{I}{R}\right) + A_5 \right. \\ &\quad \left. + K'_A \sqrt{R'^2 + I'^2} e^{\sigma R'} \cos\left(\sigma I' + w'_A + \tan^{-1} \frac{I'}{R'}\right) \right] \\ r &= \frac{1}{\tau} \left[K_B \sqrt{R^2 + I^2} e^{\sigma R} \cos\left(\sigma I + w_B + \tan^{-1} \frac{I}{R}\right) + B_5 \right. \\ &\quad \left. + K'_B \sqrt{R'^2 + I'^2} e^{\sigma R'} \cos\left(\sigma I' + w'_B + \tan^{-1} \frac{I'}{R'}\right) \right] \end{aligned} \right\} \quad \dots (3.4)$$

Where quantities with primes are defined in exactly the same way as in (3.3).

The appropriate equations of motion (3.1), (3.2) or (3.4) can now be solved by substituting the values of non-dimensional time factor σ to obtain the time history of lateral motion parameters, ϕ , ψ , β , p or r .

3.2 Motions Resulting from Arbitrary Disturbances:

The motions resulting from arbitrary forcing functions can be obtained from the motions resulting from constant impressed forces and moments by methods explained in Ref.4.

In Ref. 4 it is shown that although component motions of an airplane must be calculated simultaneously, the effects of component disturbances may, by the principle of superposition, be calculated separately and later added in desired proportions. This principle of superposition is elaborated with examples in the same reference.

4. ESTIMATION OF LATERAL STABILITY DERIVATIVES

4.1 GENERAL: Methods of estimation of contribution of all the main components of an airplane to all the derivatives, for airplanes having any sweep angle or aspect ratio, have been presented in various publications.

As long as these methods are based on available flight test or wind tunnel test data on similar designs or theoretical or empirical formulae, the values obtained are suitable only for first approximations of dynamic stability. Extensive wind tunnel test data on scaled or full scale model of the particular configuration will be essential for accurate estimations.

The estimations made here depend on theoretical treatments, based on assumptions of steady roll and yaw or experimental data obtained principally from tests made under conditions of steady roll and yaw.

In the present study, the effect of Mach number on the derivatives is indicated for the subsonic case. But for the sample case of estimation of stability derivatives for the Cessna-182 airplane, the effect of Mach number is neglected. The effects of power are briefly treated in Ref.4, but these effects are also neglected in the present study.

The estimation of stability derivatives has been based on the available formulae and methods of Refs. 1 to 5. The first three are text books, which have drawn material from published and unpublished research papers. The fourth is a summary of the available methods of estimation. The fifth is a very recent publication on the subject and has drawn material generously from 'USAF Stability and Control Datcom' which is one of the most reliable sources in use in U.S.A. for estimation of stability derivatives.

The formulae and methods contained in the above five references have much in common, but in Ref. 5 additional (empirical) correction factors are provided and also geometric twist is accounted for. Wherever there are wide variations among the formulae, it has been so pointed out and the results obtained by these various methods are tabulated in Table 6 (a) and (b) for the two flight conditions considered. The values of derivatives which are provided by the manufactures of Cessna airplane are also given in the same table for comparison. A discussion of these results follows in section 5.

4.2 The Side-slip Derivatives $C_{Y\beta}$, $C_{n\beta}$, $C_{l\beta}$:-

These derivatives may vary widely and often in an unpredictable manner with angles of attack and hence no satisfactory theoretical methods are available. Thus, it is

essential to base these estimates on wind tunnel test data. In the absence of such data, reasonably accurate estimates can be made by applying suitable corrections, to available data for similar designs. Certain theoretical and empirical formulae have been evolved for estimating the contribution of the major airplane components.

The side force derivatives are affected by such components as leading edge high-lift devices, stall control devices, trailing edge flaps, nacelles, external stores like fuel tanks etc., canopies and dorsal and ventral fins. Generally, wind tunnel test data is essential for estimating all these effects. Several research papers dealing with the effects of these individual components are available for example in Ref.4.

4.2.1. Side Force Derivative Due to Side-slip, C_{Y_β}

4.2.1.1 This derivative gives the variation of side force coefficient with a positive side-slip angle β . C_{Y_β} is usually negative. This derivative contributes to the damping of the Dutch Roll mode; thus, large negative values of C_{Y_β} might seem desirable. But large negative values of C_{Y_β} , however, may create a large time lag in the airplane's response and cause it to react sluggishly to the pilot's commands. The main contributions are from the body and the vertical tail. For wings with dihedral, the contribution of the wing may

compared to that of the vertical tail. The body contribution arises mainly because of separation of flow over the fuselage. The main contribution to $C_{Y\beta}$ is from the vertical tail. As far as possible an accurate estimate of this contribution is essential, since this factor is used in estimation of vertical tail contribution to several other derivatives. It is specially significant at low angles of attack. It is highly desirable to have tail-off and tail-on wind-tunnel test data for an accurate estimation.

Wing plan form and wing location can cause large differences in side-wash and dynamic pressure at the tail. It is difficult to predict the side-wash effects accurately and hence wind-tunnel test data is very helpful.

4.2.1.2: The contribution of various components are estimated as follows:

$$C_{Y\beta} = C_{Y\beta_W} + C_{Y\beta_B} + C_{Y\beta_V} \quad (4.1)$$

(a) Wing: Generally this contribution is small. For wings with large dihedral, this contribution is estimated from the empirical formula given in Ref. 5.

$$C_{Y\beta_W} = -0.0001 \left| \frac{b}{c} \right| .57.3 \text{ (rad}^{-1}\text{)} \quad (4.2)$$

where

Γ = Geometric dihedral, deg.

(b) Body:- A rough estimation of this contribution as given in Ref. 2 is

$$C_{Y_{\beta_B}} = -2 \frac{S_b}{S} \quad (4.3)$$

where S_b is an equivalent base area and S is the wing area. S_b lies between zero and $(\pi/4)h^2$ where h is the maximum fuselage depth. But it is very difficult to obtain an exact value of S_b . But since $C_{Y_{\beta_B}}$ is small compared to vertical tail contribution, a high degree of accuracy is not needed. $C_{Y_{\beta_B}}$ is independent of Mach number as per slender body theory.

A better approximation for this contribution is given in Ref. 5 as follows

$$C_{Y_{\beta_B}} = -2K_i (S_o/S) (\text{rad}^{-1}) \quad (4.4)$$

where

K_i = a wing-body interference factor obtained as a function of the wing location with respect to body i.e., $z_w / (d/2)$, from Fig. 4.

where

z_w = the distance from body-centre-line ^{l_o} quarter chord

the quarter chord point below the body centre line.

d = maximum body height at wing-body intersection.

S_o = cross-sectional area of the fuselage at the point X_o , along the body where the flow ceases to be potential. The distance X_o is a function of X_1 , the body station where dS_X/dX first reaches its maximum negative value. The distances X_o and X_1 are related as in Fig. 6. To find X_1 and X_o , variation of fuselage cross-sectional area along the body centre line has been tabulated in Table 2, and plotted as a function of X (Fig.5). X_1 is determined from this figure and corresponding value of X_o from Fig.6. The value of S_o is then read from Fig.5.

(c) Vertical Tail: A theoretical estimate of this contribution is made from the formula given in Ref.5.

$$C_{Y_{\beta_V}} = -k C_{L_{\alpha_V}} (1 + d\sigma/d\beta) \eta_V S_V/S \text{ (rad}^{-1}\text{)} \quad (4.5)$$

where:

k = an empirical factor depending on the constant $(b_V/2r_1)$ (defined in Fig.7) and λ_V and is obtained from Fig.7.

$C_{L_{\alpha_V}}$ = tail lift-curve-slope based on the effective aspect ratio which is approximately 1.55 times the geometric

aspect ratio (b_V^2/S_V) (Ref.3), and is calculated as follows

$$C_{L\alpha_V} = \frac{2\pi\Lambda_{V\text{eff}}}{2 + \sqrt{\frac{\Lambda_V^2 \beta^2}{K^2} \left(1 + \frac{\tan^2 \Lambda_V C/2}{\beta^2}\right) + 4}} \quad (4.6)$$

where:

$$\beta = \sqrt{1 - M^2}$$

K = ratio of actual average tail section lift-curve-slope to 2π

$$\Lambda_{V\text{eff}} = \left(\frac{\Lambda_V(B)}{\Lambda_V}\right)\Lambda_V \left\{1 + K_H \left(\frac{\Lambda_V(HB)}{\Lambda_V(B)} - 1\right)\right\} \quad (4.7)$$

$\left(\frac{\Lambda_V(B)}{\Lambda_V}\right)$ = ratio of the aspect ratio of the vertical panel in the presence of the body to that of the isolated panel and is obtained from Fig. 8 as a function of $b_V/2r_1$ and λ_V .

$\frac{\Lambda_V(HB)}{\Lambda_V(B)}$ = ratio of the aspect ratio of the vertical panel in the presence of the horizontal tail and body to that of the panel in the presence of the body alone. This ratio is obtained from Fig.9 as a function of X/C_r and Z/b (X/C_r and Z/b are

defined in the same figure)

K_H = a factor accounting for the relative size of the horizontal and vertical tails and is obtained from Fig. 10 as a function of S_H/S_V .

The effect of sidewash and variation of dynamic pressure at the vertical tail is calculated from the empirical formula

$$(1 + d\sigma/d\beta)^{\eta}_V = 0.724 + 3.06 \frac{S_V/S}{1 + \cos \wedge C/4} + 0.4 \frac{z_w}{d} + .009\Delta \quad (4.8)$$

4.2.1.3 References 1 to 3 suggest utilisation of wind tunnel test data for estimation of $C_{Y\beta}$. According to Ref.4 interference effects are so large that a generalized formula would not be completely satisfactory. A method of applying correction to the data on a similar design has, instead, been recommended. The method given above from Ref.5 probably gives the most accurate values since interference effects based on experimental results are included.

4.2.2 Variation of Rolling Moment Coefficient with

Sideslip Angle, $C_{l\beta}$

4.2.2.1: This derivative is also called the 'dihedral effect'. $C_{l\beta}$ may be positive or negative and for some

configurations it has large variations. It is a very important design parameter. It aids in damping both the Dutch Roll mode and the spiral mode. Small negative values of C_{l_β} give favourable Dutch Roll damping characteristics, but for spiral stability large negative values are necessary.

The main contributions to C_{l_β} are from the wing-body, horizontal tail and the vertical tail.

(a) Wing-Body Contribution: This contribution is again due to three aerodynamic effects.

- i) Wing geometric dihedral
- ii) Wing sweep angle
- iii) Wing position on the fuselage.

(i) When an airplane with positive dihedral side-slips, the right wing will be at a higher angle of attack ($\Delta\alpha = \beta$) than the left wing. The increased lift on the right wing and the corresponding decreased lift on the left wing, cause a negative rolling moment. This rolling moment is proportional to the geometric dihedral.

(ii) Wing sweep angle has the same effect as geometric dihedral. This effect is proportional to the lift coefficient. For large C_L i.e., at low speeds, C_{l_β} due to sweep can be very large negatively and becomes small negatively at high speeds. This poses a serious design problem for high speed airplanes with swept back wings.

iii) The fuselage contribution to C_{l_β} is also very significant. The flow field is considerably modified by the shape of the body. The cross flow component of the stream induces vertical velocities which, combined with the main stream velocity alters the local angle of attack of the wing. Consequently, a high wing configuration produces a negative rolling moment and vice versa. The effect also depends on the fuselage length ahead of the wing, its cross-sectional shape and planform and location of the wing.

(b) Horizontal Tail Contribution. The horizontal tail contribution can be explained in exactly the same manner as for the wing. Except when the horizontal tail size is considerable, this contribution is generally negligible.

(c) Vertical Tail Contribution. The sideslipping airplane produces side forces which give rise to significant rolling moment if the vertical tail aerodynamic centre is offset considerably from the rolling axis (i.e., if z is large).

4.2.2.2 : The estimation of the contribution to C_{l_β} of various airplane components is carried out as follows:

$$C_{l_\beta} = C_{l_{\beta WB}} + C_{l_{\beta H}} + C_{l_{\beta V}} \quad (4.9)$$

(a) Wing-Body: The wing-body contribution is calculated by the following formula (Ref.5).

$$\begin{aligned}
 C_{L\beta_{WB}} = 57.3 & \left[C_{LWB} \left\{ \left(\frac{C_{L\beta}}{C_L} \right) \wedge_{C/2} K_{M\wedge} K_f + \left(\frac{C_{L\beta}}{C_L} \right)_A \right\} \right. \\
 & + \left[\left(\frac{C_{L\beta}}{C_L} \right) K_{M_f} + \frac{\Delta C_{L\beta}}{C_L} \right] + (\Delta C_{L\beta}) z_w \\
 & \left. + \theta \tan \wedge_{C/4} \frac{\Delta C_{L\beta}}{\theta \tan \wedge_{C/4}} \right] \text{ rad}^{-1} \quad (4.10)
 \end{aligned}$$

where:

$C_{LWB} \approx C_L$ = airplane steady state lift coefficient

$\left(\frac{C_{L\beta}}{C_L} \right) \wedge_{C/2}$ = the effect of wing sweep contribution and is obtained from Fig. 11.

$K_{M\wedge}$ = compressibility correction to sweep and is obtained from Fig. 12.

K_f = a fuselage correction factor obtained from Fig. 13.

$\left(\frac{C_{L\beta}}{C_L} \right)_A$ = contribution due to aspect ratio and is obtained from Fig. 14.

$\left(\frac{C_{L\beta}}{C_L} \right)$ = wing dihedral effect obtained from Fig. 15.

K_{M_f} = compressibility correction factor to dihedral and is obtained from Fig. 16.

$\frac{\Delta c_{l\beta}}{\Gamma}$ = body induced effect on the wing height as a function of the cross-section of the body and is given by the empirical formula.

$$\frac{\Delta c_{l\beta}}{\Gamma} = -0.0005 A \left(\frac{d_{av}}{b} \right) \text{deg.}^{-2} \quad (4.11)$$

where

$$d_{av} = \sqrt{\frac{4(\text{average cross-sectional area})}{\pi}} \quad (4.12)$$

The average cross-sectional area is calculated from Table 2 as a weighted average.

$(\Delta c_{l\beta})_{z_w}$ = another body induced effect on the wing height as a function of z_w and d_{av} i.e., the location of the wing w.r.t. fuselage and is given by

$$(\Delta c_{l\beta})_{z_w} = \frac{1.2\sqrt{A}}{57.3} \left(\frac{z_w}{b} \right) \left(\frac{2d_{av}}{b} \right) (\text{deg}^{-1}) \quad (4.13)$$

$\left(\frac{\Delta c_{l\beta}}{\theta \tan \Lambda_{c/4}} \right)$ = a wing twist correction factor obtained from Fig. 17.

Refs. 1, 2 and 4 give a formula for the wing-body contribution which is almost similar to the above.

$$c_{l_{\beta WB}} = \left(\frac{c_{l_{\beta}}}{c_L}\right) c_L + c_{l_{\beta f}} + 1.2 \sqrt{A} \frac{z_w}{b} \frac{(h_{av} + w_{av})}{b} \quad (4.14)$$

where the values of $\left(\frac{c_{l_{\beta}}}{c_L}\right)$, $c_{l_{\beta f}}$ are given in graphs and

$h_{av} \simeq h$ = average fuselage height at wing root

$w_{av} \simeq w$ = average fuselage width at wing root.

The formula of Ref. 5 takes into account the effect of sweep and geometric twist.

Ref. 3 gives the following formula for the wing-body contribution

$$c_{l_{\beta WB}} = (c_{l_{\beta}})_W + (\Delta c_{l_{\beta}})_1 + (\Delta c_{l_{\beta}})_2 + (c_{l_{\beta}})_{W, \Gamma = 0} \quad (4.15)$$

The wing dihedral contribution $(c_{l_{\beta}})_W$ is given by

$$(c_{l_{\beta}})_W = \left(\frac{c_{l_{\beta}}}{\Gamma}\right) \Gamma + (\Delta c_{l_{\beta}})_{\text{tip shape}} \quad (4.16)$$

$(\Delta c_{l_{\beta}})_1$ is the contribution to $c_{l_{\beta}}$ due to wing-fuselage interference and is given below.

	$(\Delta c_{l_{\beta}})$
High wing	-.0006
Mid wing	0
Low wing	+.0008

$(\Delta C_{l_\beta})_2$ is the contribution to C_{l_β} due to wing-vertical tail interference and is given below

	$(\Delta C_{l_\beta})_2$
High wing	.00016
Mid wing	0
Low wing	-.00016

$$(C_{l_\beta})_{W, \Gamma=0} = C_L \left[-\frac{k(.71\lambda + .29)}{A\lambda} + .05 \right] - (\text{rad}^{-1}) \quad (4.17)$$

where

$k = 1.0$ for straight wing tips

$k = 1.5$ for round wing tips.

The above formula is a revised one for unswept, elliptical wings with zero dihedral taking into consideration changes in taper ratio, for the wing contribution to C_{l_β} .

(b) Horizontal Tail: The contribution of the horizontal tail is calculated from

$$C_{l_{\beta_H}} = C_{l_{\beta_{HB}}} \left(\frac{s_H b_H}{S b} \right) \text{rad}^{-1} \quad (4.18)$$

where $C_{l_{\beta_{HB}}}$ is calculated by treating the fuselage-horizontal tail in the same manner as fuselage-wing has been treated. Significance of $C_{l_{\beta_H}}$ depends on the magnitude of $(s_H b_H / S b)$.

(c) Vertical Tail: The vertical tail contribution is estimated from the following formula (Ref.5)

$$C_{l_{\beta_V}} = C_{Y_{\beta_V}} \cdot \frac{z}{b}$$

$$= C_{Y_{\beta_V}} \cdot \frac{(z_V \cos \alpha - l_V \sin \alpha)}{b} \quad (4.19)$$

where z_V and l_V are as defined in Fig. 18.

Refs. 1 and 3 give the following slightly different formula for $C_{l_{\beta_V}}$

$$C_{l_{\beta_V}} = - C_{L_{\alpha_V}} \frac{S_V z}{S b} \cdot \eta_V \quad (4.20)$$

4.2.3 Variation of Yawing Moment Coefficient with Sideslip Angle, $C_{n_{\beta}}$

4.2.3.1 This is also called the 'static directional' or 'weather cock' derivative. It is a measure of the tendency of the airplane to align itself in sideslip, like a weather cock, with the relative wind. It is one of the most important parameters in design. The value of $C_{n_{\beta}}$ determines primarily the Dutch Roll natural frequency and affects the spiral stability of the airplane. It varies considerably with tail size. For stability and good flying qualities

C_{n_β} should be as high as practically possible. The vertical tail, fuselage and wing contribute to C_{n_β} , but the tail contribution dominates. For positive sideslip, the vertical tail causes a positive yawing moment and the fuselage contribution is generally a negative yawing moment. The wing contribution is usually positive but generally neglected. The value of C_{n_β} must be positive for stability.

4.2.3.2 The contribution of the various components to C_{n_β} is estimated as follows

$$C_{n_\beta} = C_{n_{\beta W}} + C_{n_{\beta B}} + C_{n_{\beta V}} \quad (4.21)$$

(a) Wing: Wing contribution is generally very small and neglected. However, Refs. 1 and 4 give the following formula for $C_{n_{\beta W}}$

$$C_{n_{\beta W}} = C_L^2 \left(\frac{C_{n_\beta}}{C_L^2} \right) \quad (4.22)$$

whereas, Ref. 2 gives an additional term $C_L \left(\frac{C_{n_\beta}}{C_L} \right)$,

where, $\left(\frac{C_{n_\beta}}{C_L} \right) \simeq 0.075$ and $\left(\frac{C_{n_\beta}}{C_L^2} \right)$ can be obtained from

Ref. 3. gives the following formula

$$C_{n_{\beta W}} = .00006 (\Lambda)^{1/2} \text{ deg}^{-1} \quad (4.23)$$

(Λ in deg)

which for unswept wings is zero.

(b) Body: The fuselage contribution based on slender body theory gives (Ref.2)

$$C_{n_{\beta \text{Fus}}} = - 2 \frac{\text{Vol}_f}{S_b} \quad (4.24)$$

where Vol_f is the volume of an equivalent circular body having the same side-view as the real fuselage, i.e.,

$$\text{Vol}_f = \frac{\pi}{4} \int \bar{d}_x^2 dx \approx S_{Bs} \times l_B \quad (4.25)$$

But the slender body theory tends to over-estimate the fuselage instability, since it neglects the separation at the rear of the body. The body contribution including the interference effect of the wing on the body is estimated from the formula (Ref.5)

$$C_{n_{\beta B}} = - 57.3 K_N K_{Rl} \frac{S_{Bs}}{S} \cdot \frac{l_B}{b} (\text{rad}^{-1}) \quad (4.26)$$

where

K_N = an empirical factor for body and body and wing interference effects and is obtained from

Fig. 19. The factor K_N depends on the shape of the body, position of the C.G., the cross-section of the body etc. All these factors for Cessna are shown in Table 3.

K_{Rl} = a Reynold's number factor for the fuselage and is obtained from Fig. 20.

S_{BS} = body side area

l_B = length of the body

The body contribution given above is valid for all subsonic Mach numbers.

Refs. 1, 2, and 4 give the following formula for the body contribution

$$C_{n_{PB}} = -1.3 \frac{(\text{Fuselage volume})}{S_b} \cdot \left(\frac{h}{w_{av}} \right) \left(\frac{d_{av}}{w_{av}} \right) \quad (4.27)$$

The fuselage volume can be found by

$$\int_0^{l_B} S_x X \, dX, \text{ or can be approximated as } (l_B \times \pi \frac{d_{av}^2}{4}).$$

Ref. 3 gives the following formula for the body contribution.

$$C_{n_{PB}} = \frac{-0.96 K_\beta}{57.3} \left(\frac{S_{BS}}{S} \right) \left(\frac{l_B}{b} \right) \left(\frac{h_1}{h_2} \right)^{1/2} \left(\frac{w_2}{w_1} \right)^{1/3} \quad (4.28)$$

where

K_β = an empirical constant obtained from Fig.21
as a function of l_B/h and X_{CG}/l_B .

X_{CG} = the distance from nose to C.G.

h_1, h_2, w_1, w_2 are defined in Fig. 21.

(c) Vertical Tail : The contribution of vertical tail to C_{n_β} is estimated as follows (Ref.5)

$$\begin{aligned} C_{n_{\beta V}} &= - C_{Y_{\beta V}} \cdot \frac{\bar{l}}{b} \\ &= - C_{Y_{\beta V}} \frac{(l_V \cos \alpha + z_V \sin \alpha)}{b} \end{aligned} \quad (4.29)$$

4.3 Roll Rate Derivatives:

When an airplane rolls with angular velocity p , about its x-axis, the motion of its wing tip is helical with a non-dimensional helix angle equal to $\frac{pb}{2V}$. This motion affects the airflow along the wing and tail surfaces as illustrated in Fig.22, for two points, viz., wing tip and fin tip. These angle-of-attack changes introduce perturbation in the aerodynamic forces and moments. Further, the changes in the wing load distribution causes a modification of trailing vortex sheet. The vorticity distribution is no longer symmetrical and a sidewash is

induced on the vertical tail. Further, the trailing vortex sheet is no longer flat but helical. These sidewash effects have been studied theoretically and experimentally.

4.3.1 Variation of Side Force Coefficient with Roll Rate, C_{Y_p} :

4.3.1.1 This is not an important derivative in estimating the dynamic stability characteristics of an airplane. The main contribution is from the vertical tail, even though for some configurations the wing contribution may be significant. The sign of C_{Y_p} may be either positive or negative.

4.3.1.2 The main contribution to C_{Y_p} is from the vertical tail and is estimated from the relation

$$\begin{aligned} C_{Y_p} - C_{Y_{pV}} &= 2 \frac{z_V}{b} C_{Y_{fV}} \\ &= 2 \frac{(z_V \cos \alpha - l_V \sin \alpha)}{b} C_{Y_{fV}} \quad (4.30) \end{aligned}$$

In the above relation, the effect of sidewash is neglected. Ref. 4 gives the following modified relation which approximately accounts for the effects of wing side-wash

$$C_{Y_p} = 2 \left[\frac{z_V \cos \alpha - l_V \sin \alpha - z_V}{b} \right] C_{Y_{pV}} \quad (4.31)$$

If the effects of sidewash can be estimated the following relation from Ref. 1 can be used.

$$C_{Y_{pV}} = C_{L_{\alpha_V}} \frac{S_V}{S} \left[-\frac{2}{b} (z_V \cos \alpha - l_V \sin \alpha) + \frac{\partial \sigma'}{\partial \left(\frac{pb}{2V} \right)} \right] \quad (4.32)$$

An estimation of the effect of sidewash can be made from the graph in Ref. 6.

Refs. 2 and 3 neglect the value of C_{Y_p} .

4.3.2 Variation of Rolling Moment Coefficient with Roll Rate, C_{l_p}

4.3.2.1 This derivative is also known as the 'damping-in-roll' derivative, since, it represents the resistance of the airplane to rolling. When an airplane rolls, the angle of attack on the down-going wing is increased and that on the up-going wing is decreased. This changes the lift distribution on the two wings and a rolling moment, which opposes the initial disturbance, is produced.

C_{l_p} is a negative constant so long as the local angle of attack remains below the stalling angle. If it exceeds, C_{l_p} may become zero or even positive and the wing may 'auto rotate'.

The main contribution to C_{l_p} is from the wings. In case the horizontal tail is very large, its contribution may not be negligible. The contribution of the vertical tail is usually small. C_{l_p} is the principal determinant of the damping-in-roll characteristics of the aircraft.

4.3.2.2 The contribution to C_{l_p} of the various components is estimated as follows

$$C_{l_p} = C_{l_{p_{WB}}} + C_{l_{p_H}} + C_{l_{p_V}} \quad (4.33)$$

(a) Wing-Body: The wing-body contribution is estimated from the following relation (Ref.5)

$$C_{l_{p_{WB}}} \approx C_{l_{p_W}} = \left(\frac{\beta C_{l_p}}{K} \right) \frac{\beta}{\beta} \quad (4.34)$$

where

$$\left(\frac{\beta C_{l_p}}{K} \right) = \text{roll damping parameter obtained from Fig. 23}$$

as a function of $\Lambda_\beta = \tan^{-1} (\tan \Lambda_{c/4} / \beta) (\text{deg.})$

$$K = \text{ratio of average wing section lift curve slope, } C_{l_{\alpha_w}}, \text{ to } 2\pi .$$

Based on strip-theory technique, Ref.2 gives the following relation for the wing contribution

$$C_{l_{pW}} = \frac{C_{L\alpha}}{12} \left(\frac{1+3\lambda}{1+\lambda} \right) \quad (4.35)$$

This generally provides a higher negative value for C_{l_p} .

Another relation given in Ref.4 is as follows

$$C_{l_{pW}} = (C_{l_p})_{C_L=0} \frac{(C_{L\alpha}) C_L}{(C_{L\alpha})_{C_L=0}} - \frac{1}{8} C_L^2 \left\{ 1 + 2 \sin^2 \Lambda \frac{(A+2 \cos \Lambda)}{(A+4 \cos \Lambda)} \right\} - \frac{1}{8} \left(C_D - \frac{C_L^2}{\pi A} \right) \quad (4.36)$$

where

$$(C_{l_p})_{C_L=0} = (C_{l_p})_{C_L=0; a=2\pi} \left[\frac{A+4 \cos \Lambda}{\frac{A}{K} + 4 \cos \Lambda} \right] \quad (4.37)$$

and $(C_{l_p})_{C_L=0; a=2\pi}$ is obtained from charts of Ref.4 as a function of aspect ratio, sweep angle and taper ratio.

Ref.3 reproduces a chart from NACA-TR 635, which gives the values of $C_{l_{pW}}$ as a function of aspect ratio and taper ratio.

(b) Horizontal Tail: The contribution to C_{l_p} of an extremely large horizontal tail can be significant. It is calculated

from the relation (Ref.5)

$$C_{l_{pH}} = 0.5 (C_{l_p})_H \frac{S_H}{S} \left(\frac{b_H}{b}\right)^2 \quad (4.38)$$

where $(C_{l_p})_H$ is the value of C_{l_p} based on the horizontal tail geometry and is found from equation 4.34. The factor 0.5 is introduced to account for the rotation of flow produced by the wing (Ref.4).

(c) Vertical Tail: The contribution of the vertical tail is estimated from the relation (Ref.5)

$$C_{l_{pV}} = 2 \left(\frac{z_V}{b}\right)^2 C_{Y_{\beta_V}} \quad (4.39)$$

The above formula is modified (Ref.4) to allow for approximate correction for the effect of the wing on the damping-in-roll of conventionally located vertical tail surface

$$\begin{aligned} C_{l_{pV}} &= 2 \left(\frac{z}{b}\right) \left(\frac{z}{b} - \frac{z_V}{b}\right) C_{Y_{\beta_V}} \\ &\equiv \frac{2(z_V \cos \alpha - l_V \sin \alpha)}{b^2} (z_V \cos \alpha - l_V \sin \alpha - z_V) \\ &\quad \times C_{Y_{B_V}} \end{aligned} \quad (4.40)$$

4.3.3 Variation of Yawing Moment Coefficient with

Roll Rate, C_{n_p} :

4.3.3.1 This is one of the cross derivatives that cause coupling between the rolling and yawing motions of an airplane. The main contributions are from wing and vertical tail. The wing contribution is a negative yawing moment. The vertical tail contribution may be positive or negative depending on the tail geometry, the angle of attack and sidewash from the wing. C_{n_p} affects the Dutch Roll damping in that, the larger its negative value, the less Dutch Roll damping. Thus, a positive C_{n_p} is desirable.

The wing contribution consists of two parts. The first part is due to change in profile drag due to change in wing angle of attack. For a positive roll, the angle of attack increases on the right wing and decreases on the left wing, which normally causes an increase in the profile drag on the former and a decrease on the latter, thus producing a yawing moment.

The second part is due to the fore and aft inclination of the lift vector caused by rolling. The lift vector on the right wing is inclined forward and that on the other, backward. This causes a negative yawing moment proportional to C_L .

4.3.3.2. The contribution of wing and vertical tail to C_{n_p} is estimated as follows.

$$C_{n_p} = C_{n_{pW}} + C_{n_{pV}} \quad (4.41)$$

(a) Wing: The wing contribution is in two parts

$$C_{n_{pW}} = \frac{(\Delta C_{n_p})_1}{(C_L)} C_L + \frac{(\Delta C_{n_p})_2}{(C_{D_0})_\alpha} \cdot (C_{D_0})_\alpha \quad (4.42)$$

$$= (C_{n_p})_1 + (C_{n_p})_2$$

Strip theory using two dimensional flow assumptions lead to the formula (Ref.2)

$$\frac{(\Delta C_{n_p})_1}{(C_L)} = \frac{1}{12} \left(\frac{1+3\lambda}{1+\lambda} \right) \quad (4.43)$$

$$\frac{(\Delta C_{n_p})_2}{(C_{D_0})_\alpha} = \frac{1}{12} \frac{(1+3\lambda)}{(1+\lambda)} \quad (4.44)$$

These formulas are good only for a first approximation and give an over estimation of $(C_{n_p})_1$ even for unswept wings. For low aspect ratio and high sweep angles, the effect is more pronounced. The estimate for $(C_{n_p})_2$ is satisfactory except for low aspect ratio wings.

Ref. 4 provides empirical charts which give a more accurate estimation $(\Delta C_n)_1$ and $(\Delta C_n)_2$

from Fig. 24.

Ref. 5 provides the following relation for the wing contribution. This formula takes into account the wing sweep, and geometric twist.

$$C_{n_{pw}} = - C_{l_{pw}} \tan \alpha - \left[- C_{l_p} \tan \alpha - \left(\frac{C_{np}}{C_L} \right)_{C_L=0} \cdot C_L \right] \\ + \left(\frac{\Delta C_{np}}{\theta} \right) \theta + \left(\frac{\Delta C_{np}}{\alpha_{\delta_f} \delta_f} \right) \alpha_{\delta_f} \delta_f \quad (4.45)$$

where:

$C_{l_{pw}}$ = wing contribution to C_{l_p} calculated from
(4.34)

α = wing angle of attack

C_L = wing lift coefficient

C_L = total airplane lift coefficient.

$\left(\frac{C_{np}}{C_L} \right)_{C_L=0} =$ variation of the yawing moment coefficient
due to roll rate at zero lift, given by

$$\left(\frac{C_{np}}{C_L} \right)_{C_L=0} = \frac{A + 4 \cos \Lambda_{c/4}}{AB + 4 \cos \Lambda_{c/4}} \left[\frac{AB + \frac{1}{2} (AB + \cos \Lambda_{c/4}) \tan^2 \Lambda_{c/4}}{A + \frac{1}{2} (A + \cos \Lambda_{c/4}) \tan^2 \Lambda_{c/4}} \right] \cdot$$

$$\left(\frac{C_{np}}{C_L} \right)_{C_L=0} \quad (4.46)$$

where $B = \sqrt{1 - M^2 \cos^2 \Lambda_{c/4}}$

and $\left(\frac{C_{np}}{C_L}\right)_{\substack{C_L=0 \\ M=0}} =$ variation of the low speed yawing moment coefficient due to roll rate at zero lift, given by

$$\left(\frac{C_{np}}{C_L}\right)_{\substack{C_L=0 \\ M=0}} = -\frac{1}{6} \frac{A + 6(A + \cos \Lambda_{c/4}) \left(\frac{\bar{X}}{c} \frac{\tan \Lambda_{c/4}}{A} + \frac{\tan^2 \Lambda_{c/4}}{12} \right)}{A + 4 \cos \Lambda_{c/4}} (\text{rad}^{-1}) \quad (4.47)$$

where:

\bar{X} = distance from the C.G. to the aerodynamic centre, positive when the a.c. is aft of the C.G. and \bar{C} is the m.A.C.

$\left(\frac{\Delta C_{np}}{\theta}\right) =$ effect of linear wing twist and is obtained from Fig. 25.

θ = geometric twist in deg.

$\left(\frac{\Delta C_{np}}{\alpha_{\delta_f} \delta_f}\right) =$ effect of symmetric flap deflection (Ref.5)

δ_f = streamwise flap deflection in deg.

α_{δ_f} = two dimensional lift effectiveness parameter (Ref.5).

The two methods mentioned above for the wing contribution could yield different values and the selection of the method to be used should probably depend on the type of airplane for which one is more applicable than the other.

Using an elliptical lift distribution, Ref.3 gives the following formula

$$(C_{n_p})_W = - \frac{C_L}{8} \quad (4.48)$$

(b) Vertical Tail: The vertical tail contribution is estimated from the following relation (Ref.5)

$$\begin{aligned} C_{n_{p_V}} &= - 2 (1/b) \left(\frac{z - z_V}{b} \right) C_{Y_{\beta_V}} \\ &= - 2 \frac{(l_V \cos \alpha + z_V \sin \alpha)}{b} \frac{(z_V \cos \alpha - l_V \sin \alpha - z_V)}{b} \\ &\quad \times C_{Y_{\beta_V}} \end{aligned} \quad (4.49)$$

Ref. 1 gives an almost similar formula for the tail contribution

$$C_{n_{p_V}} = C_{L_{\alpha_V}} \frac{S_V}{S} \cdot \frac{1}{b} \cdot \left(2 \cdot \frac{z}{b} - \frac{\partial \sigma}{\partial \left(\frac{pb}{2V} \right)} \right) \quad (4.50)$$

4.4 Yaw Rate Derivatives

When a yaw rate, r , is super imposed on the airplane motion, the velocity field is significantly changed. For a

positive yaw rate, the velocity vector on the left wing increases and that on the right wing correspondingly decreases. This, in turn, increases the aerodynamic forces on the left wing and decrease them on the right wing. This lift distribution leads to an unsymmetrical trailing vortex sheet and sidewash at the tail.

4.4.1 Variation of Side Force Coefficient with Yaw Rate, C_{Y_r} :

4.4.1.1 This derivative which normally is of minor importance can be calculated from the relation (Ref.5)

$$\begin{aligned}
 C_{Y_r} \approx C_{Y_{rV}} &= -2 \frac{1}{b} C_{Y_{\beta V}} \\
 &= -2 \frac{(l_V \cos \alpha + z_V \sin \alpha)}{b} C_{Y_{\beta V}}
 \end{aligned}
 \tag{4.51}$$

since the only significant contribution is from the vertical tail.

4.4.2 Variation of Rolling Moment Coefficient with Yaw Rate,

$$\underline{C_{l_r}}$$

4.4.2.1 This is another cross derivative. For a positive yaw rate, the asymmetric load distribution also produces a positive

rolling moment, which is proportional to original C_L . Aspect ratio, sweep, taper ratio, dihedral and twist are all important factors. The use of partial span high lift devices also affects this derivative. The main contributions are from the wing and the vertical tail. If the horizontal tail is very large, its contribution is significant and can be calculated in the same way as wing contribution and applying necessary corrections for effective sideslip. The vertical tail causes rolling moment proportional to its height above the roll axis.

C_{l_r} has little effect on the Dutch Roll damping but is quite important to the spiral mode. For spiral stability, it is desirable that C_{l_r} be as small a positive number as possible.

4.4.2.2 Ref. 3 gives a very simple approximation for C_{l_r} as

$$C_{l_r} = \frac{C_L}{4} \quad (4.52)$$

For a better estimate, the contributions of various components are calculated as follows

$$C_{l_r} = C_{l_{rW}} + C_{l_{rV}} \quad (4.53)$$

(a) Wing: The wing contribution is estimated from the following relation (Ref.5)

$$C_{l_{rW}} = C_L \left(\frac{C_{l_r}}{C_L} \right)_{C_L=0} + \left(\frac{\Delta C_{l_r}}{f} \right) \frac{f}{57.3} + \left(\frac{\Delta C_{l_r}}{\theta} \right) \theta + \left(\frac{\Delta C_{l_r}}{\alpha_{\delta_f} \delta_f} \right) \alpha_{\delta_f} \delta_f \text{ (rad}^{-1}\text{)} \quad (4.54)$$

where:

$\left(\frac{C_{l_r}}{C_L} \right)_{C_L=0} =$ variation of rolling moment coefficient due to yaw rate at zero lift, given by

$$\left(\frac{C_{l_r}}{C_L} \right)_{C_L=0} = \left\{ \frac{1 + \frac{A(1-B^2)}{2B(AB+2\cos \Lambda_{c/4})} + \frac{AB+2\cos \Lambda_{c/4}}{AB+4\cos \Lambda_{c/4}} \cdot \frac{\tan^2 \Lambda_{c/4}}{8}}{1 + \frac{A + 2\cos \Lambda_{c/4}}{A + 4\cos \Lambda_{c/4}} \tan^2 \Lambda_{c/4}} \right\} \times \left(\frac{C_{l_r}}{C_L} \right)_{C_L=0} \quad (4.55)$$

$M=0$

and $\left(\frac{C_{l_r}}{C_L} \right)_{C_L=0} =$ Variation of low speed rolling moment coefficient due to yaw rate at zero lift and is obtained from Fig.26 as a function of aspect ratio, sweep of the quarter chord and taper ratio.

$\frac{\Delta C_{l_r}}{\Gamma} =$ increment in C_{l_r} due to dihedral, given by

$$\frac{\Delta C_{l_r}}{\Gamma} = \frac{1}{12} \frac{\pi A \sin \Lambda_{c/4}}{A + 4 \cos \Lambda_{c/4}} \quad (4.56)$$

$\left(\frac{\Delta C_{l_r}}{\theta}\right) =$ increment in C_{l_r} due to wing twist and is obtained from Fig.27

$\left(\frac{\Delta C_{l_r}}{\alpha_{\delta_f} \delta_f}\right) =$ effect of symmetric flap deflection (Ref.5)

and α_{δ_f} and δ_f are defined earlier.

Refs. 1 and 4 give the value of $\left(\frac{C_{l_r}}{C_L}\right)$ as a function of aspect ratio, sweep and taper ratio in the form of charts.

(b) Vertical Tail: The vertical tail contribution can be estimated from the relation (Ref.5)

$$\begin{aligned} C_{l_{rV}} &= -2 \left(\frac{l_V}{b}\right) \left(\frac{z_V}{b}\right) C_{Y\beta_V} \\ &= -2 \frac{(l_V \cos \alpha + z_V \sin \alpha)}{b} \frac{(z_V \cos \alpha - l_V \sin \alpha)}{b} \\ &\quad \times C_{Y\beta_V} \end{aligned} \quad (4.57)$$

(c) Horizontal Tail: Ref.2 gives a relation for estimating the horizontal tail contribution

$$C_{l_{rH}} = \left[(C_{l_r})_H - 2\frac{1}{b} C_{l_{\beta_H}} \right] \frac{b_H S_H}{b S} \quad (4.58)$$

where $(C_{l_r})_H$ is calculated as for the wing from (4.54) and (4.55).

4.4.3 Variation of Yawing Moment Coefficient with Yaw Rate, C_{n_r} :

4.4.3.1 This is also called the 'damping-in-yaw' derivative, since it represents the resistance of the airplane to yawing. The unsymmetric aerodynamic forces cause an increase in the profile and induced drag on the left wing with a corresponding decrease on the right wing. This produces a negative yawing moment. The effect depends on aspect ratio, taper ratio and sweep back. The side force on the vertical tail also produces a negative yawing moment. The main contributions are from the wing and vertical tail. C_{n_r} is the main contributor to the damping of the Dutch Roll mode and also plays a significant role in determining spiral stability. It is a very important parameter in airplane lateral stability characteristics. For best effects in each of these modes, large negative values of C_{n_r} are desirable.

4.4.3.2 The contributions of wing and tail are estimated as follows

$$C_{n_r} = C_{n_{rW}} + C_{n_{rV}} \quad (4.59)$$

(a) Wing: The wing contribution is estimated from the relation

$$C_{n_{rW}} = \left(\frac{C_{n_r}}{C_L^2} \right) C_L^2 + \left(\frac{C_{n_r}}{\bar{C}_{D_o}} \right) \bar{C}_{D_o} \quad (4.60)$$

where:

$\left(\frac{C_{n_r}}{C_L^2} \right)$ = a factor accounting for the variation of induced drag and is obtained from Fig.28.

$\left(\frac{C_{n_r}}{\bar{C}_{D_o}} \right)$ = a factor accounting for the variation of profile drag and is obtained from Fig. 29.

\bar{C}_{D_o} = wing profile drag coefficient given by

$$\bar{C}_{D_o} = \left(C_D - \frac{C_L^2}{\pi A} \right) \quad (4.61)$$

(b) Vertical Tail: The vertical tail contribution is estimated from the relation (Ref.5)

$$\begin{aligned} C_{n_{rV}} &= 2 \left(\frac{l_V}{b} \right)^2 C_{Y_{\beta V}} \\ &= 2 \frac{(l_V \cos \alpha + z_V \sin \alpha)^2}{b^2} C_{Y_R} \end{aligned} \quad (4.62)$$

5. RESULTS AND DISCUSSION

5.1 The methods of estimation of lateral stability derivatives have been applied to a sample case. The Cessna-182 airplane has been considered for this purpose. The mass characteristics of the airplane are given in Table 1. The geometric characteristics and other allied constants which are essential for the estimation of stability derivatives are given in Tables 2 and 3. These constants do not vary with the flight conditions. Table 2 gives the variation of fuselage cross-section area along the body length.

The two flight conditions considered, approach at 73 mph and cruise at 150 mph at 5000 ft. are given in Table 4. Table 5 gives the list of parameters dependent on flight conditions.

Based on the methods of Section 4, lateral stability derivatives have been estimated for the two flight conditions. The values of derivatives along with the contribution of major components as estimated by the methods of Refs.1 to 5 are presented in Table 6(a) and (b). The values estimated from Ref.5 are complete and compare very favourably with the values provided by the manufacturers which are also presented in the same tables. Table 7 makes a comparative study of the estimated derivatives and their values supplied by the

manufacturers, in that, it gives the percentage error from these values.

5.2 In some respects, the methods of estimation given in Refs. 1 to 4 are not complete, in that, all the contributions are not accounted for. A discussion of these methods and values obtained from them follows.

5.2.1 $C_{Y\beta}$: Refs. 1 to 4 do not provide any theoretical relations for estimation of this derivative. All of them suggest use of wind tunnel test data for the design in question. According to Ref.4, interference effects are so large that a generalized formula would not be completely satisfactory. The method of Ref.5, a very recent publication, includes interference effects based on experimental results and hence probably gives the most accurate theoretical estimate.

5.2.2 $C_{L\beta}$: The methods of Refs. 1, 2 and 4 give a slightly higher negative value of wing contribution than that of Ref.5. This is because of the variation in the values of the factors. Only Ref.5 gives a method for estimation of horizontal tail contribution. The vertical tail contribution is almost the same in all cases. The overall value of $C_{L\beta}$ from the methods of Refs. 1 to 4 is slightly higher (but compares more favourably with that of the manufactures) and from that of Ref.5 is

5.2.3 $C_{n\beta}$: Ref. 1, 2 and 4 have given relations for estimating wing contribution. This contribution being proportional to square of lift coefficient, is considerable for the approach configuration. If this contribution is considered, the value of $C_{n\beta}$ becomes too large compared to manufacturer's value. However, it is negligible for the cruise condition. The other references neglect this contribution entirely. The body contribution from Refs. 1, 2 and 4 is a much higher negative value than that from Ref.5. The method of Ref.3 gives a very low negative value for this contribution. The tail contribution is almost same by all the methods. The overall value of $C_{n\beta}$ estimated from Refs. 1 and 4 appears to agree quite well with manufacturer's value for approach configuration only. For the cruise configuration, these two values are too low, The value from Ref. 2 is too low and from Ref.3 is too high for both configurations. The value given by Ref. 5 is more consistent for both the configurations.

5.2.4 C_{Yp} : As mentioned before, this is not a very important derivative. Refs. 2 and 3 neglect this derivative. The methods of Refs. 1, 4 and 5 give small positive values for this derivative since the angle of attack is more. However, the manufacturers give a negative value for this derivative. The methods of Refs. 1 and 4 take the effects of sidewash into account.

Ref.6 quoting USAF 'DATCOM', gives a method which gives a value of C_{Y_p} much in agreement with manufacturer's value. But since this derivative is not important, the value given by Ref.4 only is considered in the final equations.

5.2.5 C_{l_p} : Refs. 1, 2 and 5 give the same formula and charts for the wing contribution. The value from Ref.3 also is the same. The method of Ref.4 also gives almost the same value for this contribution. Refs. 1 to 3 do not give any relation for the horizontal tail or vertical tail contributions. The methods of Refs. 4 and 5 give almost the same value for these contributions except that the relation for vertical tail contribution given in Ref.5 is slightly modified in Ref.4. The overall value of C_{l_p} compares well with the manufacturer's value.

5.2.6 C_{n_p} : The methods of Refs. 1, 2 and 4 give a smaller negative value than that of Ref. 3 or Ref. 5. The tail contribution is almost the same by all the methods. Correspondingly, the overall value of C_{n_p} by methods of Refs.1, 2 and 4 is less negative and that of Refs. 3 and 5 more negative than the manufacturer's value. Ref. 6 gives a formula for $C_{n_{pW}}$ from NACA-TN 1581 and for $C_{n_{pV}}$ from NACA-TN 2587 which gives an

overall value which agrees very favourably with manufacturer's value. However, value given by Ref.5 has been used in the solution of equations of motion.

5.2.7 $\underline{C_{Y_r}}$: The value of C_{Y_r} by the method of Ref.1, neglecting the effects of sidewash compare very favourably with manufacturer's values. However, the value by Ref.5 is considered for the solution of equations of motion. Refs. 2 and 3 neglect this derivative entirely.

5.2.8 $\underline{C_{l_r}}$: The value of C_{l_r} by all the methods except Ref.3 are almost same. For the approach configuration this value is as much as 30% more than the manufacturer's value. For the cruise configuration, the agreement is much better. The value by Ref.3 is too rough an estimate.

5.2.9 $\underline{C_{n_r}}$: All the references give the same relation for this derivative. The estimated value compares favourably with the manufacturer's value.

5.3 A consolidated list of estimated derivatives and those supplied by the manufacturers has been given in Table 8. These two sets of values for each of the two flight configurations have been used in the solution of equations of motion

for an initial disturbance of 10^0 in sideslip angle. Typical input/output for the digital computer programmes of Appendices 'C' and 'E' are shown in Appendix 'F'. The resulting response of the airplane in terms of roll, yaw and sideslip angles and roll and yaw rates are presented in Appendix 'G'.

5.4 Computer programmes were developed for solution of the equations of motion, both by Laplace transform method (Appendices 'A' and 'C') ^{and} Fourth order Runge-Kutta method (Appendices 'D' and 'E'). The former method computes the roots of the characteristic equation in addition to the time history of airplane motion, whereas, the latter computes only the time history, but has the advantage of being simpler and quicker. The results obtained by the two methods agree very closely for the time increments used (.05 sec) in the numerical integration. The roots of characteristic equation obtained from the Laplace transform method enable the estimation of the period and damping characteristics. These characteristics for the two flight conditions are given in Table 9(a) and (b).

6. CONCLUSION

6.1 The methods of estimation of lateral stability derivatives from Ref. 5 appear to be more appropriate, since they are complete and the derivatives estimated from these methods for the sample case of Cessna-182H compare very well with those provided by the manufacturers for both approach and cruise configurations.

6.2 The application of the methods of this report to the above sample case predicts dynamically stable lateral airplane motions. In the spiral mode, $T_{1/2}$, the time to damp to half amplitude, is 123 secs. and 62 secs. for the two flight conditions as against 53.5 secs. and 38.5 secs. predicted by the manufacturers values. This shows a tendency towards spiral instability which seems to agree with the actual case.

6.3 The variation in $T_{1/2}$ and damping from the manufacturers values for the other two modes, namely, Rolling and Dutch Roll, is within 5% and 10% respectively.

THIS PAGE IS LEFT BLANK INTENTIONALLY.

THIS PAGE IS LEFT BLANK INTENTIONALLY.


LIST OF REFERENCES

1. Etkin, Bernard.: 'Dynamics of Flight, Stability and Control'. John Wiley and Sons, Inc., New York, London, Sydney, 1965.
2. Seckel, Edward.: 'Stability and Control of Airplanes and Helicopters'. Academic Press, New York and London, 1964.
3. Perkins, Courtland D.; and Hage, Robert E.: 'Airplane Performance, Stability and Control'. John Wiley and Sons, London, 1950.
4. Campbell, John P.; and McKinney, Marion O.: 'Summary of Methods For Calculating Dynamic Lateral Stability and Response and For Estimating Lateral Stability Derivatives'. NACA TR-1098, 1952.
5. Jan Roskam.: 'Methods For Estimating Stability and Control Derivatives of Conventional Subsonic Airplanes'. Published by the Author himself.
6. Smetna, Frederick O.; Summey, Delbert C.; and Johnson, W. Donald.: 'Riding and Handling Qualities of Light Aircraft - - A Review and Analysis'. NASA CR-1975, 1972.
7. Smetna, Frederick O.; Summey, Delbert C.; and Johnson, W. Donald.: 'Flight Testing Techniques for the Evaluation of Light Aircraft Stability Derivatives. A Review and

APPENDIX 'A'

FLOW CHART OF SOLUTION OF LATERAL EQUATIONS
OF MOTION BY LAPLACE TRANSFORM METHOD

FLOW CHART OF SOLUTION OF LATERAL
EQUATIONS OF MOTION BY LAPLACE
TRANSFORM METHOD.

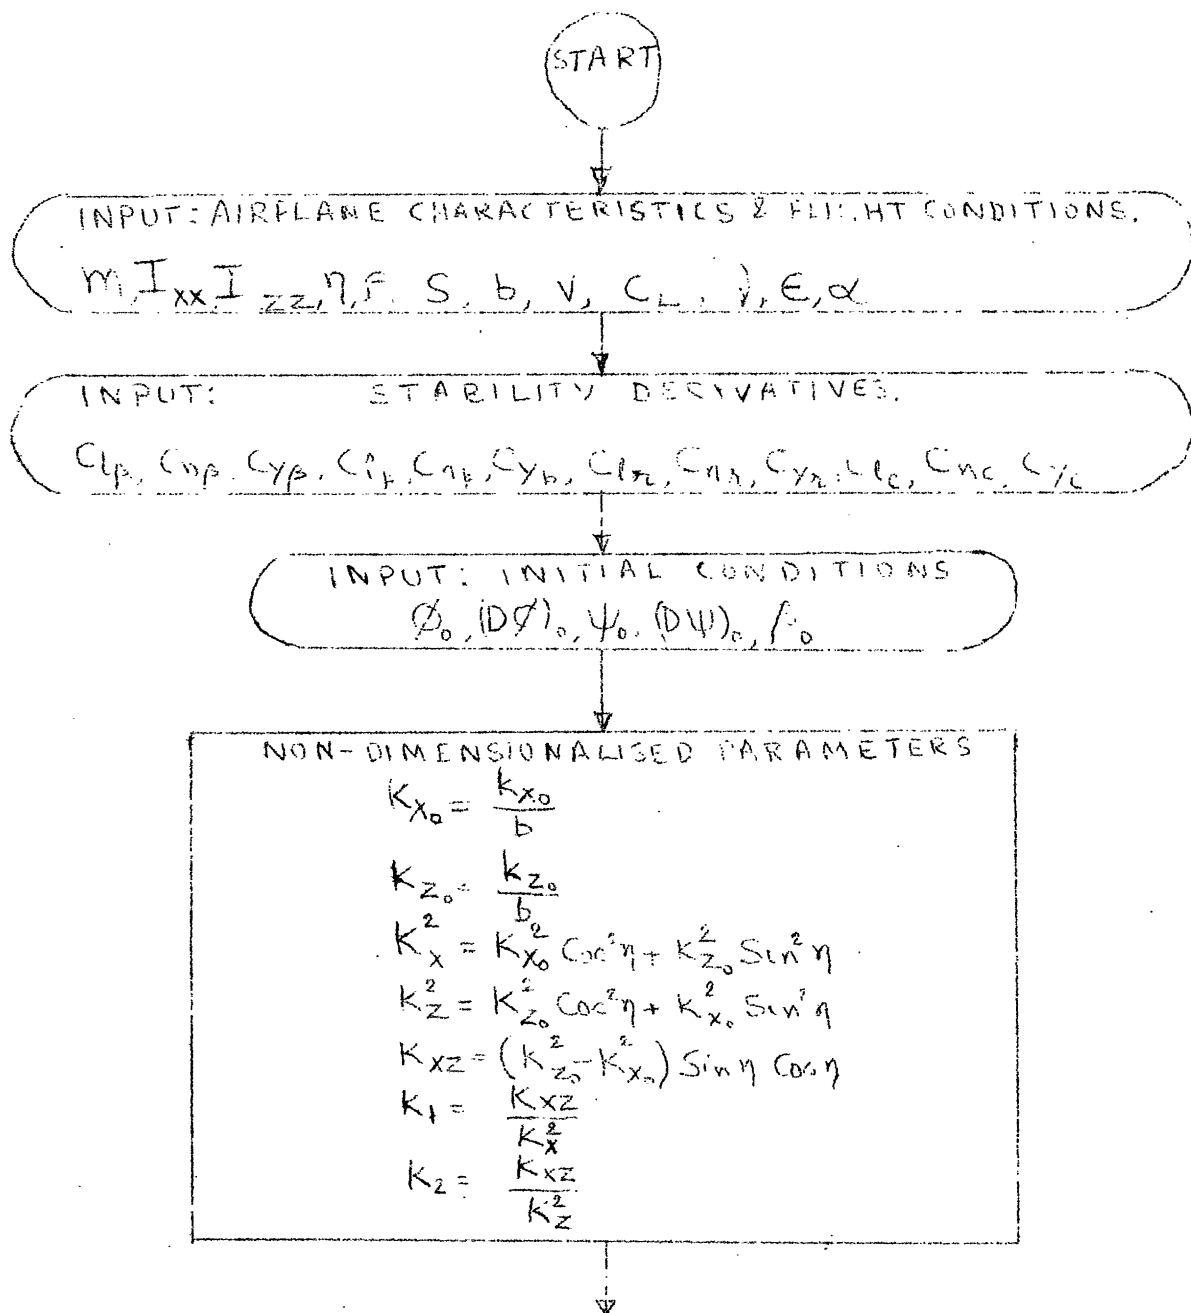

$$\begin{aligned}\tau &= m/\hbar^2 v \\ \sigma &= t/\tau \\ \mu &= m/\epsilon \leq b\end{aligned}$$

$$\begin{aligned}l_p &= \frac{\mu}{2k_x^2} C_{lp} \\ n_p &= \frac{\mu}{2k_z^2} C_{np} \\ y_p &= \frac{1}{2} C_{yp} \\ l_p &= \frac{1}{4k_x^2} C_{lp} \\ n_p &= \frac{1}{4k_z^2} C_{np} \\ y_p &= \frac{1}{4\mu} C_{yp} \\ l_2 &= \frac{1}{4k_x^2} C_{l_2} \\ n_2 &= \frac{1}{4k_z^2} C_{n_2} \\ y_2 &= \frac{1}{4\mu} C_{y_2} \\ l_c &= \frac{\mu}{2k_x^2} C_{lc} \\ n_c &= \frac{\mu}{2k_z^2} C_{nc} \\ y_c &= \frac{1}{2} C_{yc}\end{aligned}$$

↓

CALCULATE: CONSTANTS P_1 TO P_7

$$P_1 = -L_p n_n + K_1 n_p + K_2 L_n$$

$$P_2 = L_p n_n - L_n n_p$$

$$P_3 = L_p n_n - L_n n_p$$

$$P_4 = L_p n_p - L_n n_p$$

$$P_5 = K_1 n_p - L_p$$

$$P_6 = K_2 L_p - n_p$$

$$P_7 = -P_2 y_\beta + P_3 y_p + P_4 y_n - P_4$$

↓

CALCULATE: COEFFICIENTS OF THE CHARACTERISTIC EQUATION

$$A = 1 - K_1 K_2$$

$$B = P_1 - A y_\beta$$

$$C = -P_1 y_\beta + P_2 + P_5 y_p + P_6 y_n - P_6$$

$$D = P_5 \frac{C_L}{2} + P_6 \frac{C_L}{2} \tan \gamma + P_7$$

$$E = P_3 \frac{C_L}{2} + P_4 \frac{C_L}{2} \tan \gamma$$

↓

SOLVE: THE CHARACTERISTIC EQUATION $A\lambda^4 + B\lambda^3 + C\lambda^2 + D\lambda + E = 0$ BY USING "QUART" SUBROUTINE

$$\lambda_1 = Y(1) + i Y(5)$$

$$\lambda_2 = Y(2) + i Y(6)$$

$$\lambda_3 = Y(3) + i Y(7)$$

$$\lambda_4 = Y(4) + i Y(8)$$

↓

↓

CALCULATE: CONSTANTS a_0 to a_5

$$a_0 = \phi_0 A$$

$$a_1 = \phi_0 B + (D\phi)_0 A$$

$$a_2 = \phi_0 C + \beta_0 P_5 + (D\phi)_0 (-A y_\beta + k_2 l_\alpha - n_\alpha) - (D\psi)_0 (K_1 n_\alpha l_\alpha) + l_c - n_c K_1$$

$$a_3 = \phi_0 (P_6 \frac{C_L}{2} \tan \gamma + P_7) - \psi_0 (P_5 \frac{C_L}{2} \tan \gamma) - \beta_0 P_3 + (D\phi)_0 (P_6 y_\alpha - P_6 - K_2 l_\alpha y_\beta + n_\alpha y_\beta) + (D\psi)_0 (-P_5 y_\alpha + P_5 + K_1 n_\alpha y_\beta - l_\alpha y_\beta) - l_c (n_\alpha + y_\beta) - y_c P_5$$

$$a_4 = \left[\phi_0 P_4 - \psi_0 P_3 + (D\phi)_0 P_6 - (D\psi)_0 P_5 \right] \frac{C_L}{2} \tan \gamma + l_c (n_\beta y_\alpha - n_\beta y_\alpha + n_\alpha y_\beta) + n_c (l_\beta y_\alpha - l_\beta - l_\alpha y_\beta) - y_c P_3$$

$$a_5 = (-l_c n_\beta + n_c l_\beta) \frac{C_L}{2} \tan \gamma$$

↓

CALCULATE: CONSTANTS b_0 to b_5

$$b_0 = \psi_0 A$$

$$b_1 = \psi_0 B + (D\psi)_0 A$$

$$b_2 = \psi_0 C - \beta_0 P_6 - (D\phi)_0 (K_2 l_\beta - n_\beta) + (D\psi)_0 (-A y_\beta + K_1 n_\beta - l_\beta) - l_c K_2 + n_c$$

$$b_3 = -\phi_0 P_6 \frac{C_L}{2} + \psi_0 (P_5 \frac{C_L}{2} + P_7) - \beta_0 P_4 + (D\phi)_0 (-P_6 y_\beta + K_2 l_\beta y_\beta - n_\beta y_\beta) + (D\psi)_0 (-P_5 y_\beta - K_1 n_\beta y_\beta + l_\beta y_\beta) - l_c (K_2 y_\beta + n_\beta) - n_c (l_\beta + y_\beta) - y_c P_6$$

$$b_4 = \left[-\phi_0 P_4 + \psi_0 P_3 - (D\phi)_0 P_6 + (D\psi)_0 P_5 \right] \frac{C_L}{2} + l_c (n_\beta y_\beta - n_\beta y_\beta) + n_c (l_\beta y_\beta - l_\beta y_\beta) - y_c P_4$$

$$b_5 = (l_c n_\beta - l_\beta n_c) \frac{C_L}{2}$$

↓

CALCULATE: CONSTANTS C_0 to C_4

$$C_0 = \beta_0 A$$

$$C_1 = \phi_0 A \frac{C_L}{2} + \psi_0 A \frac{C_L}{2} \tan \gamma + \beta_0 P_1 + (D\phi)_0 A y_p - (D\psi)_0 A (y_n - 1) + y_c A$$

$$C_2 = \phi_0 P_1 \frac{C_L}{2} + \psi_0 P_1 \frac{C_L}{2} \tan \gamma + \beta_0 P_2 + (D\phi)_0 \left[A \frac{C_L}{2} - K_2 l_p y_n + K_2 l_p + n_p y_n - n_p + (K_2 l_n - n_n) y_p \right] + (D\psi)_0 \left[A \frac{C_L}{2} \tan \gamma + K_1 n_p y_n - K_1 n_p - l_p y_n - (K_1 n_n - l_n) y_p \right] + l_c (-K_2 y_n + K_2 + y_p) + n_c (y_n - 1 - K_1 y_p) + y_c P_1$$

$$C_3 = \phi_0 P_2 \frac{C_L}{2} + \psi_0 P_2 \frac{C_L}{2} \tan \gamma + (D\phi)_0 \left[-K_2 l_p \frac{C_L}{2} \tan \gamma + n_p \frac{C_L}{2} \tan \gamma + K_2 l_n \frac{C_L}{2} - n_n \frac{C_L}{2} \right] + (D\psi)_0 \left[K_1 n_p \frac{C_L}{2} \tan \gamma - l_p \frac{C_L}{2} \tan \gamma - K_1 n_n \frac{C_L}{2} + l_n \frac{C_L}{2} \right] + l_c (n_p y_n - n_p - n_n y_p + \frac{C_L}{2} - K_2 \frac{C_L}{2} \tan \gamma) + n_c (-l_p y_n + l_p + l_n y_p - K_1 \frac{C_L}{2} + \frac{C_L}{2} \tan \gamma) + y_c P_2$$

$$C_4 = l_c (n_p \frac{C_L}{2} \tan \gamma - n_n \frac{C_L}{2}) + n_c (l_n \frac{C_L}{2} - l_p \frac{C_L}{2} \tan \gamma)$$

CALCULATE: CONSTANTS A_1 to A_6 , B_1 to B_6
 C_1 to C_5 and E_1 to E_4

$$A_5 = \frac{a_5}{E}$$


$$A_6 = \frac{1}{E} (a_4 - a_5 \frac{D}{E})$$


$$B_5 = \frac{b_5}{E}$$

$$B_6 = \frac{1}{E} (b_4 - \frac{b_5 D}{E})$$

$$C_5 = \frac{C_4}{E}$$

(COMMON TO ⑤, ⑮ AND ⑮)

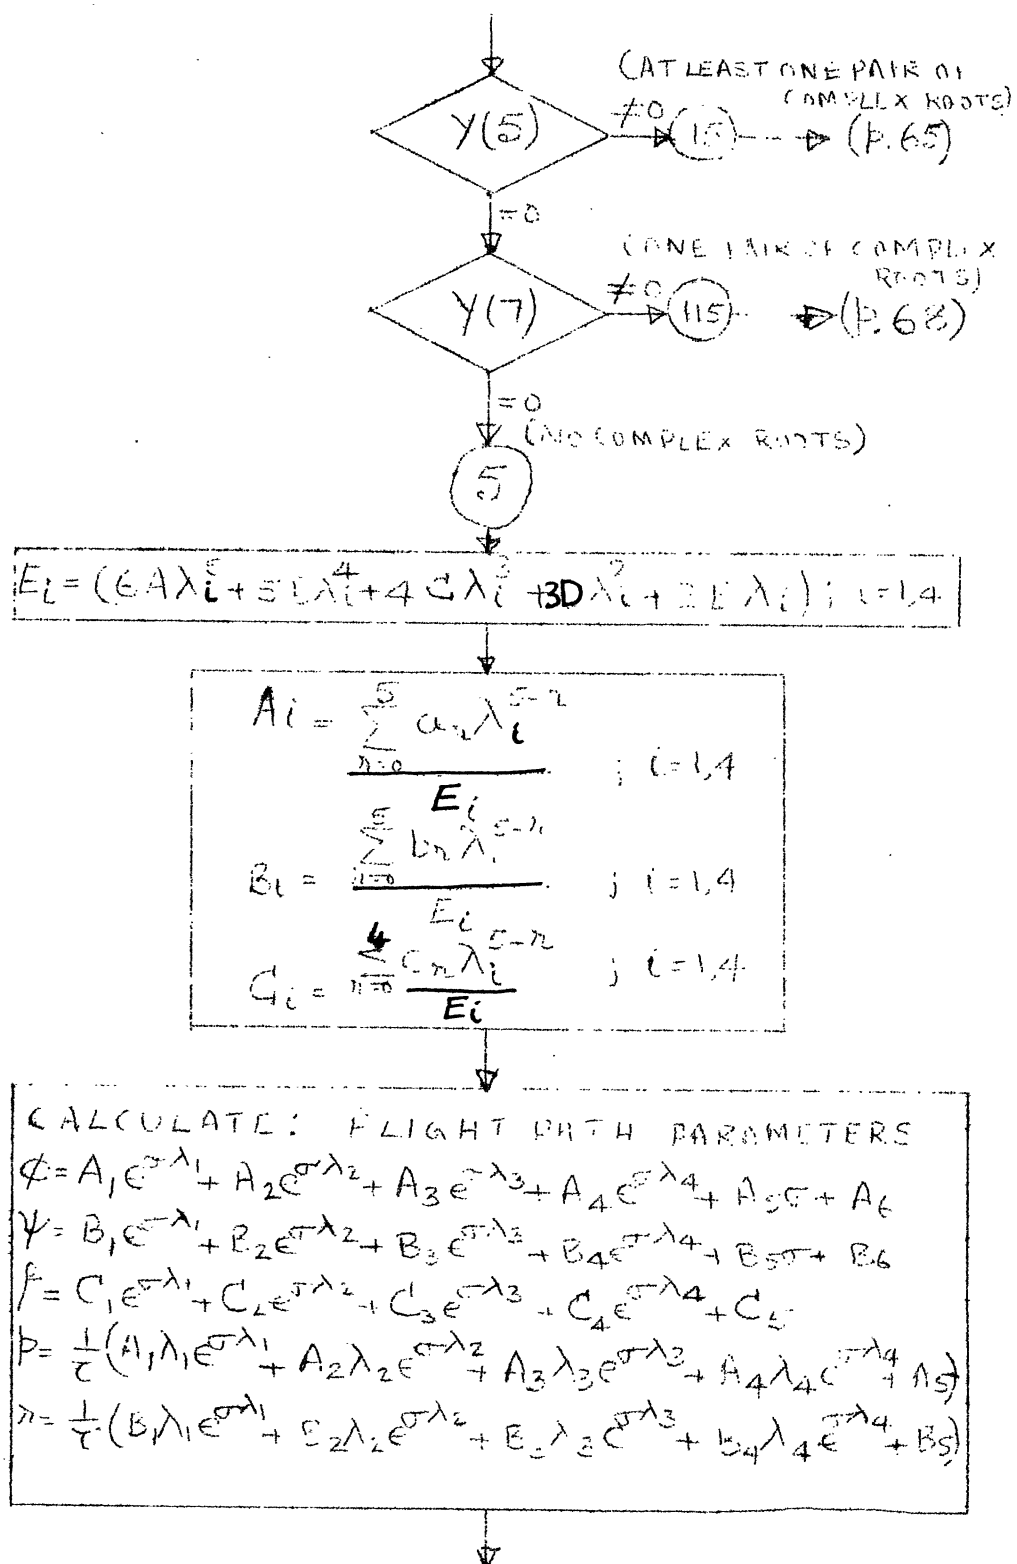

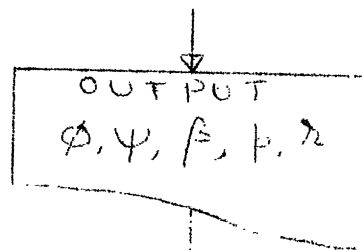

65

STOP

(P.64)

15

$$A_1 = \frac{\sum_{n=0}^5 a_n \lambda_1^{5-n}}{(6A\lambda_1^5 + 5B\lambda_1^4 + 4C\lambda_1^3 + 3D\lambda_1^2 + 2E\lambda_1)} = R_A(I_A) \quad (\text{SEE APPX 'B'})$$

$$A_2 = \frac{\sum_{n=0}^5 a_n \lambda_2^{5-n}}{(6A\lambda_2^5 + 5B\lambda_2^4 + 4C\lambda_2^3 + 3D\lambda_2^2 + 2E\lambda_2)} = R_H(I_A)$$

$$K_A = 2 \sqrt{R_A^2 + I_A^2}$$

$$\omega_A = \tan^{-1} \left(\frac{I_A}{R_A} \right)$$

$$B_1 = \frac{\sum_{n=0}^5 b_n \lambda_1^{5-n}}{(6A\lambda_1^5 + 5B\lambda_1^4 + 4C\lambda_1^3 + 3D\lambda_1^2 + 2E\lambda_1)} = R_B + iI_B$$

$$B_2 = \frac{\sum_{n=0}^5 b_n \lambda_2^{5-n}}{(6A\lambda_2^5 + 5B\lambda_2^4 + 4C\lambda_2^3 + 3D\lambda_2^2 + 2E\lambda_2)} = R_B - iI_B$$

$$K_B = 2 \sqrt{R_B^2 + I_B^2}$$


$$\omega_B = \tan^{-1} \left(\frac{I_B}{R_B} \right)$$

$$C_1 = \frac{\sum_{n=0}^4 c_n \lambda_1^{5-n}}{(6A\lambda_1^5 + 5B\lambda_1^4 + 4C\lambda_1^3 + 3D\lambda_1^2 + 2E\lambda_1)} = R_C + iI_C$$

$$C_2 = \frac{\sum_{n=0}^4 c_n \lambda_2^{5-n}}{(6A\lambda_2^5 + 5B\lambda_2^4 + 4C\lambda_2^3 + 3D\lambda_2^2 + 2E\lambda_2)} = R_C - iI_C$$

$$K_C = 2 \sqrt{R_C^2 + I_C^2}$$

$$\omega_C = \tan^{-1} \left(\frac{I_C}{R_C} \right)$$

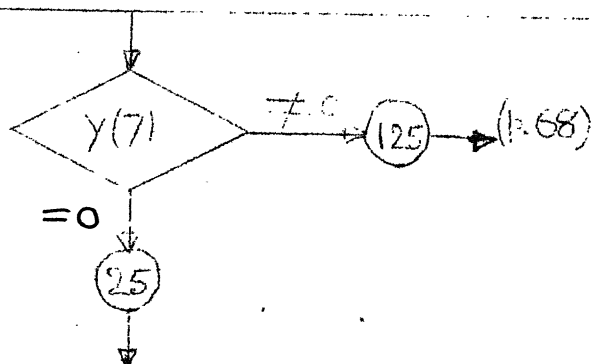

$$E_i = (6A\lambda_i^5 + 5B\lambda_i^4 + 4C\lambda_i^3 + 3D\lambda_i^2 + 2E\lambda_i) ; i=3,4$$

$$A_i = \frac{\sum_{n=0}^5 a_n \lambda_i^{5-n}}{E_i} \quad ; i = 3,4$$

$$B_i = \frac{\sum_{n=0}^4 b_n \lambda_i^{4-n}}{E_i} \quad ; i = 3,4$$

$$C_i = \frac{\sum_{n=0}^3 c_n \lambda_i^{3-n}}{E_i} \quad ; i = 3,4$$

CALCULATE: FLIGHT PATH PARAMETERS

$$\phi = K_A e^{\sigma R} \cos(\sigma I + \omega_A) + A_3 e^{\sigma \lambda_3} + A_4 e^{\sigma \lambda_4} + A_5 \sigma + A_6$$

$$\psi = K_B e^{\sigma R} \cos(\sigma I + \omega_B) + B_3 e^{\sigma \lambda_3} + B_4 e^{\sigma \lambda_4} + B_5 \sigma + B_6$$

$$\beta = K_C e^{\sigma R} \cos(\sigma I + \omega_C) + C_3 e^{\sigma \lambda_3} + C_4 e^{\sigma \lambda_4} + C_5$$

$$p = \frac{1}{\tau} \left[K_A \sqrt{R^2 + I^2} e^{\sigma R} \cos\left(\sigma I + \omega_A + \tan^{-1}\left(\frac{I}{R}\right)\right) + A_5 \right. \\ \left. + A_3 \lambda_3 e^{\sigma \lambda_3} + A_4 \lambda_4 e^{\sigma \lambda_4} \right]$$

$$r = \frac{1}{\tau} \left[K_B \sqrt{R^2 + I^2} e^{\sigma R} \cos\left(\sigma I + \omega_B + \tan^{-1}\left(\frac{I}{R}\right)\right) + B_5 \right. \\ \left. + B_3 \lambda_3 e^{\sigma \lambda_3} + B_4 \lambda_4 e^{\sigma \lambda_4} \right]$$

OUTPUT
 ϕ, ψ, β, p, r

65

STOP

115 (p. 64)

$$E_i = (6A\lambda_i^5 + 5B\lambda_i^4 + 4C\lambda_i^3 + 3D\lambda_i^2 + 2E\lambda_i), i=1,2$$

$$A_i = \frac{\sum_{n=0}^5 a_n \lambda_i^{5-n}}{E_i}, i=1,2$$

$$B_i = \frac{\sum_{n=0}^4 b_n \lambda_i^{4-n}}{E_i}, i=1,2$$

$$C_i = \frac{\sum_{n=0}^3 c_n \lambda_i^{3-n}}{E_i}, i=1,2$$

(p. 66) 125

$$\lambda_3 = \gamma(B) + i\gamma(V) = R' + iI'$$

$$\lambda_4 = \gamma(W) + i\gamma(Z) = R' - iI'$$

$$A_3 = \frac{\sum_{n=0}^5 a_n \lambda_3^{5-n}}{(6A\lambda_3^5 + 5B\lambda_3^4 + 4C\lambda_3^3 + 3D\lambda_3^2 + 2E\lambda_3)} = R'_A + iI'_A$$

(SEE APPENDIX 'B')

$$A_4 = \frac{\sum_{n=0}^5 a_n \lambda_4^{5-n}}{(6A\lambda_4^5 + 5B\lambda_4^4 + 4C\lambda_4^3 + 3D\lambda_4^2 + 2E\lambda_4)} = R'_A - iI'_A$$

$$K'_A = 2\sqrt{R'^2_A + I'^2_A}$$

$$\omega'_A = \tan^{-1}\left(\frac{I'_A}{R'_A}\right)$$

$$B_3 = \frac{\sum_{n=0}^5 b_n \lambda_3^{5-n}}{(6A\lambda_3^5 + 5B\lambda_3^4 + 4C\lambda_3^3 + 3D\lambda_3^2 + 2E\lambda_3)} = R'_B + iI'_B$$

$$B_4 = \frac{\sum_{n=0}^5 b_n \lambda_4^{5-n}}{(6A\lambda_4^5 + 5B\lambda_4^4 + 4C\lambda_4^3 + 3D\lambda_4^2 + 2E\lambda_4)} = R'_B - iI'_B$$

$$K'_B = 2\sqrt{R'^2_B + I'^2_B}$$


$$\omega'_B = \tan^{-1}\left(\frac{I'_B}{R'_B}\right)$$

$$C_3 = \frac{\sum_{n=0}^4 c_n \lambda_3^{5-n}}{(6A\lambda_3^5 + 5B\lambda_3^4 + 4C\lambda_3^3 + 3D\lambda_3^2 + 2E\lambda_3)} = R'_C + iI'_C$$

$$C_4 = \frac{\sum_{n=0}^4 c_n \lambda_4^{5-n}}{(6A\lambda_4^5 + 5B\lambda_4^4 + 4C\lambda_4^3 + 3D\lambda_4^2 + 2E\lambda_4)} = R'_C - iI'_C$$

$$K'_C = 2\sqrt{R'^2_C + I'^2_C}$$

$$\omega'_C = \tan^{-1}\left(\frac{I'_C}{R'_C}\right)$$

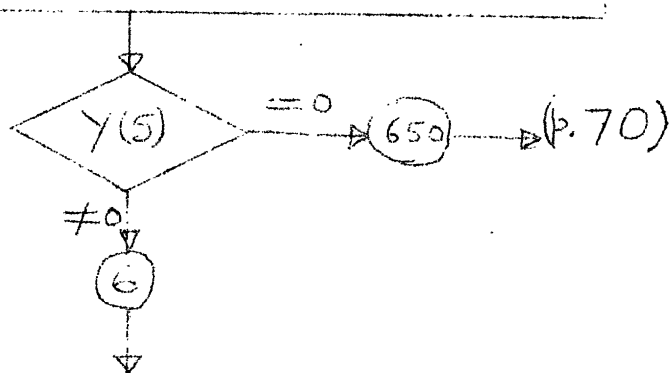

CALCULATE! FLIGHT PATH PARAMETERS.

$$\phi = K_A e^{\sigma R} \cos(\sigma I + \omega_A) + K'_A e^{\sigma R'} \cos(\sigma I' + \omega'_A) + A_5 \sigma + A_6$$

$$\psi = K_B e^{\sigma R} \cos(\sigma I + \omega_B) + K'_B e^{\sigma R'} \cos(\sigma I' + \omega'_B) + B_5 \sigma + B_6$$

$$\beta = K_C e^{\sigma R} \cos(\sigma I + \omega_C) + K'_C e^{\sigma R'} \cos(\sigma I' + \omega'_C) + C_5$$

$$p = \frac{1}{\tau} \left[K_A \sqrt{R^2 + I^2} \cos(\sigma I + \omega_A + \tan^{-1} \frac{I}{R}) + A_5 + K'_A \sqrt{R'^2 + I'^2} \cos(\sigma I' + \omega'_A + \tan^{-1} \frac{I'}{R'}) \right]$$

$$r = \frac{1}{\tau} \left[K_B \sqrt{R^2 + I^2} \cos(\sigma I + \omega_B + \tan^{-1} \frac{I}{R}) + B_5 + K'_B \sqrt{R'^2 + I'^2} \cos(\sigma I' + \omega'_B + \tan^{-1} \frac{I'}{R'}) \right]$$

OUTPUT
 ϕ, ψ, β, p, r

65

STOP

(p. 69)

650

CALCULATE! FLIGHT PATH PARAMETERS

$$\phi = A_1 e^{\sigma \lambda_1} + A_2 e^{\sigma \lambda_2} + K'_A e^{\sigma R'} \cos(\sigma I' + \omega'_A) + A_5 \sigma + A_6$$

$$\psi = B_1 e^{\sigma \lambda_1} + B_2 e^{\sigma \lambda_2} + K'_B e^{\sigma R'} \cos(\sigma I' + \omega'_B) + B_5 \sigma + B_6$$

$$\beta = C_1 e^{\sigma \lambda_1} + C_2 e^{\sigma \lambda_2} + K'_C e^{\sigma R'} \cos(\sigma I' + \omega'_C) + C_5$$

$$p = \frac{1}{\tau} \left[A_1 \lambda_1 e^{\sigma \lambda_1} + A_2 \lambda_2 e^{\sigma \lambda_2} + A_5 + K'_A \sqrt{R'^2 + I'^2} \cos(\sigma I' + \omega'_A + \tan^{-1} \frac{I'}{R'}) \right]$$

$$r = \frac{1}{\tau} \left[B_1 \lambda_1 e^{\sigma \lambda_1} + B_2 \lambda_2 e^{\sigma \lambda_2} + B_5 + K'_B \sqrt{R'^2 + I'^2} \cos(\sigma I' + \omega'_B + \tan^{-1} \frac{I'}{R'}) \right]$$

OUTPUT
 ϕ, ψ, β, p, r

65

STOP

APPENDIX 'B'**SPECIAL LOCATIONS USED IN SECTION 3**

SPECIAL NOTATIONS USED IN SECTION 3

If two roots λ_1, λ_2 of the characteristic equation are complex, then we can write

$$\lambda_1, \lambda_2 = R \pm i I \quad (B.1)$$

Further, we can write the power of λ_1 as follows

$$\begin{aligned} \lambda_1^k &= (R + i I)^k \\ &= R^k + kR^{k-1} (iI) + \frac{k \cdot (k-1)}{2!} R^{k-2} (iI)^2 + \dots + (iI)^k \\ &= R^k - k \frac{(k-1)}{2!} R^{k-2} I^2 + \frac{k \cdot (k-1) \cdot (k-2) \cdot (k-3)}{4!} R^{k-4} I^4 - \\ &\quad + i(kR^{k-1} I - \frac{k \cdot (k-1) \cdot (k-2)}{3!} R^{k-3} I^3 + \dots) \\ &= R_k + i I_k \end{aligned} \quad (B.2)$$

We can now substitute for λ_1 in the expression for the coefficient A_1

$$\begin{aligned} A_1 &= \sum_{j=0}^4 a_j (R_{5-j} + iI_{5-j}) + a_5 \\ &\quad (6AR_5 + 5BR_4 + 4CR_3 + 3DR_2 + 2ER_1) \\ &\quad + i(6AI_5 + 5BI_4 + 4CI_3 + 3DI_2 + 2EI_1) \end{aligned}$$

which can be written as

$$A_1 = \frac{x_1 + i y_1}{x_2 + i y_2} = \left(\frac{x_1 x_2 + y_1 y_2}{x_2^2 + y_2^2} \right) + i \left(\frac{x_2 y_1 - x_1 y_2}{x_2^2 + y_2^2} \right)$$

$$= R_A + i I_A \quad (B.4)$$

A_2 will be the complex conjugate of A_1 and will be

$$A_2 = R_A - i I_A \quad (B.5)$$

Similarly

$$B_1, B_2 = R_B \pm i I_B \quad (B.6)$$

$$C_1, C_2 = R_C \pm i I_C \quad (B.7)$$

If the other pair of roots is also complex, then exactly as above

$$A_3, A_4 = R'_A \pm i I'_A \quad (B.8)$$

$$B_3, B_4 = R'_B \pm i I'_B \quad (B.9)$$

$$C_3, C_4 = R'_C \pm i I'_C \quad (B.10)$$

- - -

APPENDIX 'C'

DIGITAL COMPUTER PROGRAMME LISTING FOR
SOLUTION OF LATERAL EQUATIONS OF MOTION
BY LAPLACE TRANSFORM METHOD

C **** THIS PROGRAMME EVALUATES THE COEFFICIENTS OF CHARACTERISTIC EQUA-
 C **** TION OF LATERAL MOTION OF AN AIRPLANE USING MASS, GEOMETRIC AND
 C **** AERODYNAMIC PARAMETERS, SOLVES THE QUARTIC EQUATION, SOLVES THE
 C **** EQUATIONS OF MOTION BY LAPLACE TRANSFORM METHOD TO PREDICT THE
 C **** TIME HISTORY OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL AND YAW
 C **** RATES.

```

    DIMENSION PHID(200), PSID(200), BETAD(200), ROVELD(200), YAVELD(200),
    ITL(200)
    DIMENSION TIME(5,120), PARAM(5,120), NP(5)
    COMMON/ GPHM/ ISCALE, NPLOT, NOPRNT, IHSIZE, JVSIZI
    NPLOT=1
    IHSIZE=12
    JVSIZI=8
    ISCALE=0
    NOPRNT=1
    DIMENSION AAY(10), BBY(10)
    DIMENSION AA(10), BB(10), CC(10),      AD(10), E(10), BD(10), CD(10)
    DIMENSION A(10)
    DIMENSION PER(2), THALF(4)
    READ 2101, WEIT, XIKD, ZIKD, SPAN, AREA
    READ 2501, PHID, DPHID, PSID, DPSID, BTDO
    DO 165 L=1,2
    READ 2101, VELM, RHO, EPSD, ALFAD, GAMMAD
    DO 165 LJK=1,2
    READ 2501, CLB, CNB, CYB
    READ 2501, CLP, CNP, CYP
    READ 2501, CLR, CNR, CYR
    READ 2501, CLC, CNC, CYC
    GRTY=32.2
    PI=4.*ATA(1.)
    PID=1570./PI
    AMASS=WEIT/GRTY
    CIA=(ALFAD-EPSD)/PID
    GAMMA=GAMMAD/PID
    BTAD=BTDO/PID
    VEL=VELM*58./60.
    CL=2.*WEIT/(RHO*VEL**2*AREA)
    XKD=SQRT(XIKD/AMASS)
    ZKD=SQRT(ZIKD/AMASS)
    CLG=.5*CL*TAN(GAMMA)
    XXK=((XKD*COS(ETA))**2+(ZKD*SIN(ETA))**2)/(SPAN**2)
    ZZK=((ZKD*COS(ETA))**2+(XKD*SIN(ETA))**2)/(SPAN**2)
    ZZK=((ZKD**2-XKD**2)*SIN(ETA)*COS(ETA))/(SPAN**2)
    XK1=XZK/XXK
    ZK2=XZK/ZZK
    TOU=AMASS/(RHO*AREA*VEL)
    PERT=2.*PI*TOU
    THN=-1.69*TOU
    AMU=AMASS/(RHO*AREA*SPAN)
    SLB=.5*AMU/XXK*CLB
    SLP=.025*CLP/XXK
    SLR=.025*CLR/XXK
    SLC=.5*AMU/XXK*CLC
    SNB=.5*AMU/ZZK*CNB
    SNP=.025*CNP/ZZK
  
```

```

SNR=G.25*CNR/ZZK
SNC=.5*AMU/ZZK*CNC
YB=.5 *CYB
YP=.25*CYP/AMU
YR=.25*CYR/AMU
YC=.5*CYC
P1=-SLP-SNR+AK1*SNP+AK2*SLR
P2=SLP*SNR-SLR*SNP
P3=SLB*SNR-SLR*SNB
P4=SLP*SNB-SLB*SNP
P5=AK1*SNB-SLB
P6=AK2*SLB-SNB
P7=-P2*YB+P3*YP+P4*YR-P4
DIMENSION Y(8)
A(2)=1.-AK1*AK2
A(3)=P1-A(2)*YB
A(4)=-P1*YB+P2+P5*YP+P6*YR-P6
A(5)=P5*.5*CL+P6*CLG+P7
A(6)=P3*.5*CL+P4*CLG
PRINT 30.3
PRINT  ACO2,WEIT,XIKO,ZIKO,SPAN,AREA
PRINT  BCO3,VFLM,RHO,CL,ALFAD,GAMMAD
PRINT  BCO4,CYB,CYP,CYR,CYC,CLB,CLP,CLR,CLC,CNB,CNP,CNR,CNC
PRINT  BCO5,PHIO,DPHIO,PSIO,DPSIO,BTDO
PRINT  ACO5
PRINT  BCO27
PRINT  30.1
PRINT  30.2
PRINT  ACO1
PRINT  30.27
PRINT  A(1),I=2,6)
A0=PHIO*A(2)
A1=PHIO*A(3)+DPHIO*A(2)
A2=PHIO*A(4)-BTA0*P5+DPHIO*(-A(2)*YB+AK2*SLR-SNR)
1-DPSIO*(AK1*SNR-SLR)+SLC-SNC*AK1
A3=PHIO*(P6*CLG+P7)- PSIO*P5*CLG-BTA0*P3+DPHIO*(P6*YR-P6-AK2*
SLR*YB)+DPSIO*(-P5*YR+P5+AK1*SNR*YB-SLR*YB)-SLC*(SNR+YB)+
2SNC*(AK1*YB+SLR)-YC*P5+DPHIO*SNR*YB
A4=(PHIC*P4-PSIO*P3+DPHIO*P6-DPSIO*P5)*CLG+SLC*(SNB-SNB*
1YR+SNR*YB)+SNC*(SLB*YR-SLB-SLR*YB)-YC*P3
A5=CLG*(-SLC*SNB+SNC*SLB)
B0=PSIO*A(2)
B1=PSIO*A(3)+DPSIO*A(2)
B2=PSIO*A(4)-BTA0*P6-DPHIO*(AK2*SLP-SNP)+DPSIO*(-A(2)*YB+AK1*
1SNP-SLP)-SLC*AK2+SNC
B2=-.5*PHIO*P6*CL+PSIO*(.5*P5*CL+P7)-BTA0*P4+DPHIO*(-P6*YP+
1AK2*SLP*YB-SNP*YB)+DPSIO*(P5*YP-AK1*SNP*YB+SLP*YB)+
2SLC*(AK2*YB+SNP)-SNC*(SLP+YB)- YC*P6
B4=.5*( PSIO*P3-DPHIO*P6+DPSIO*P5)*CL+SLC*(SNB*YP-SNP*YB)
1+SNC*(SLP*YB-SLB*YP)-YC*P4-.5*PHIO*P4*CL
B5=.5*(SLC*SNB-SNC*SLB)*CL
C0=BTA0*A(2)
C1=.5*PHIO*A(2)*CL+PSIO*A(2)*CLG+BTA0*P1+DPHIO*A(2)*YP-DPSIO*
1A(2)*(YR-.5)+YC*A(2)
C2=.5*PHIO*P1*CL+PSIO*P1*CLG+BTA0*P2+DPHIO*(.5*CL*A(2)-AK2*SLP*

```

```

4YR+AK2*SLP
1+SNP*YR-SNP+(AK2*SLR-SNR)*YP)+DPSIO*(A(2)*CLG+AK1*SNP*YR-
2AK1*SNP-SLP*YR+SLP-(AK1*SNR-SLR)*YP)+SLC*(-AK2*YR+AK2*YP)+SNC*
3(YR-1.-AK1*YP)+YC*P2
C3=PSIO*P2*CLG+DPHIO*(-AK2*SLP*CLG+SNP*CLG+AK2*SLR*
1CL*.5-SNR*CL*.5)+DPSIO*(AK1*SNP*CLG-SLP*CLG-AK1*SNR*CL*.5+SLR*CL*
2.5)+SLC*(SNP*YR-SNP-SNR*YP+.5*CL-AK2*CLG)+SNC*(-SLP*YR+SLP+
3SLR*YP-AK1*CL*.5+CLG)+YC*P2+.5*CL*PHIO*P2
C4=SLC*(SNP*CLG-SNR*.5*CL)+SNC*(SLR*CL*.5-SLP*CLG)
CALL QUART(A,Y)
DO 1 I=1,4
1 THALF(I)=THN/Y(I)
IF (Y(5).EQ.0.0) GO TO 2
PER(1)=PERT/ABS(Y(5))
2 IF (Y(7).EQ.0.0) GO TO 3
PER(2)=PERT/ABS(Y(7))
3 CONTINUE
PRINT 3051,(PER(I),I=1,2),(THALF(I),I=1,4)
3051 FORMAT(/5X,6(F20.4))
AA(5)=A5/A(6)
AA(6)=(A4-A5*A(5)/A(6))/A(6)
BB(5)=B5/B(6)
BB(6)=(B4-B5*A(5)/A(6))/A(6)
CC(5)=C4/C(6)
AAY(5)=AA(5)/TOU
BBY(5)=BB(5)/TOU
IF (Y(5).NE.0.0) GO TO 15
IF (Y(7).NE.0.0) GO TO 115
DO 20 I=1,4
4B(I)=A5+Y(I)*(A4+Y(I)*(A3+Y(I)*(A2+Y(I)*(A1+Y(I)*A0))))
E(I)=Y(I)*(2.*A(6)+Y(I)*(3.*A(5)+Y(I)*(4.*A(4)+Y(I)*(5.*A(3)+
1Y(I)*6.*A(2))))
AA(I)=4B(I)/E(I)
BD(I)=B5+Y(I)*(B4+Y(I)*(B3+Y(I)*(B2+Y(I)*(B1+Y(I)*B0))))
BB(I)=BD(I)/E(I)
CD(I)=Y(I)*(C4+Y(I)*(C3+Y(I)*(C2+Y(I)*(C1+Y(I)*C0))))
CC(I)=CD(I)/E(I)
AAY(I)=AA(I)*Y(I)/TOU
BBY(I)=BB(I)*Y(I)/TOU
20 CONTINUE
PRINT 3100
3000 FORMAT(/10X,*AA(1)=*,11X,*AA(2)=*,11X,*AA(3)=*,11X,*AA(4)=*,
11X,*AA(5)=*,11X,*AA(6)=*)
PRINT 3050,(AA(I),I=1,6)
3050 FORMAT(/4X,6(4X,F8.5,4X))
PRINT 3100
3100 FORMAT(/10X,*BB(1)=*,11X,*BB(2)=*,11X,*BB(3)=*,11X,*BB(4)=*,
11X,*BB(5)=*,11X,*BB(6)=*)
PRINT 3050,(BB(I),I=1,6)
PRINT 3200
3200 FORMAT(/10X,*CC(1)=*,11X,*CC(2)=*,11X,*CC(3)=*,11X,*CC(4)=*,
11X,*CC(5)=*)
PRINT 3050,(CC(I),I=1,5)
PRINT 3300
3300 FORMAT(/10X,*AAY(1)=*,11X,*AAY(2)=*,11X,*AAY(3)=*,11X,

```

```

1*AA(4)=*,11X,*AA(5)=*)
  PRINT 3050,(AA(I),I=1,5)
  PRINT 3400
3400  FORMAT(//11X,*BBY(1)=*,11X,*BBY(2)=*,11X,*BBY(3)=*,
11X,*BBY(4)=*,11X,*BBY(5)=*)
  PRINT 3050,(BBY(I),I=1,5)
  PRINT 3027
  PRINT 300
  PRINT 3025
  PRINT 3001
  PRINT 3027
  PRINT 80,(AA(I),Y(I),I=1,4),AA(5),AA(6)
30  FORMAT(//5X,*.....=*,4(F10.6,*EXP(SIGMA*,F10.6,*)+*)/
15X,F10.6,*SIGMA+*,F10.6)
  PRINT 80,(BB(I),Y(I),I=1,4),BB(5),BB(6)
  PRINT 90,(CC(I),Y(I),I=1,4),CC(5)
  PRINT 90,(AA(I),Y(I),I=1,4),AA(5)
  PRINT 90,(BBY(I),Y(I),I=1,4),BBY(5)
90  FORMAT(//5X,*.....=*,4(F10.6,*EXP(SIGMA*,F10.6,*)+*)/
15X,F10.6)
1015 T=0.0
  DO 1010 I=1,120
    DIMENSION AB(10),BA(10),BC(10),BAA(10),ABBY(10),ZD(10)
    SIGMA=T/T00
    SUM=0.
    SUMP=0.
    SMP=0.
    SMUP=0.0
    TOT=0.0
    DO 1010 I=1,4
      P=SIGMA*Y(I)
      ZD(I)=EXP(P)
      BA(I)=AA(I)*ZD(I)
      BAA(I)=AA(I)*ZD(I)
      AB(I)=BB(I)*ZD(I)
      ABBY(I)=BBY(I)*ZD(I)
      BC(I)=CC(I)*ZD(I)
      SUM=SUM+BA(I)
      SUMP=SUMP+BAA(I)
      SMP=SMP+AB(I)
      SMUP=SMUP+ABBY(I)
      TOT=TOT+BC(I)
1010 CONTINUE
    PHI=SUM+AA(5)*SIGMA+AA(6)
    PSI=SMP+BB(5)*SIGMA+BB(6)
    BETA=TOT+CC(5)
    ROLVEL=SUMP+AA(5)
    YAWVEL=SMUP+BBY(5)
    PHID(LIKE)=PHI*180./PI
    PSID(LIKE)=PSI*180./PI
    BETAD(LIKE)=BETA*180./PI
    ROVELD(LIKE)=ROLVEL*180./PI
    YAVELD(LIKE)=YAWVEL*180./PI
    T1(LIKE)=T
    T=T+0.05

```

```

1000 CONTINUE
      GO TO 65
15  R1=Y(1)
      R2=Y(1)**2-Y(5)**2
      R3=Y(1)**3-3.*Y(1)*Y(5)**2
      R4=Y(1)**4-6.*(Y(1)*Y(5))**2+Y(5)**4
      R5=Y(1)**5-10.*Y(1)**3*Y(5)**2+5.*Y(1)*Y(5)**4
      A11=Y(3)
      A12=2.*Y(5)*Y(1)
      A13=9.*Y(1)**2*Y(5)-Y(5)**3
      A14=4.*(Y(1)**3*Y(5)-Y(1)*Y(5)**3)
      A15=(5.*Y(1)**4-15.*(Y(1)*Y(5))**2+Y(5)**4)*Y(5)
      AX1=40*R5+A1*R4+A2*R3+A3*R2+A4*R1+A5
      AY1=40*A15+A1*A14+A2*A13+A3*A12+A4*A11
      X2=0.*A(2)*R5+5.*A(3)*R4+4.*A(4)*R3+3.*A(5)*R2+2.*A(6)*R1
      Y2=5.*A(2)*A15+5.*A(3)*A14+4.*A(4)*A13+3.*A(5)*A12+2.*A(6)*A11
      Z=X2**2+Y2**2
      RA=(AX1*X2+AY1*Y2)/Z
      A1A=(X2*AY1-AX1*Y2)/Z
      BX1=80*R5+B1*R4+B2*R3+B3*R2+B4*R1+B5
      BY1=80*A15+B1*A14+B2*A13+B3*A12+B4*A11
      RB=(BX1*X2+BY1*Y2)/Z
      B1B=(X2*BY1-BX1*Y2)/Z
      CX1=60*R5+C1*R4+C2*R3+C3*R2+C4*R1
      CY1=60*A15+C1*A14+C2*A13+C3*A12+C4*A11
      RC=(CX1*X2+CY1*Y2)/Z
      C1C=(X2*CY1-CX1*Y2)/Z
      AKA=2.*SQRT(RA**2+A1A**2)
      BKB=2.*SQRT(RB**2+B1B**2)
      CKC=2.*SQRT(RC**2+C1C**2)
      CALL ARCTAN(RA,A1A,WA)
      CALL ARCTAN(RB,B1B,WB)
      CALL ARCTAN(RC,C1C,WC)
      CALL ARCTAN(Y(1),Y(5),WAA)
      YAKA=SQRT(Y(1)**2+Y(5)**2)/TOU
      AK4A=AKA/YAKA
      AK4B=BKB/YAKA
      IF(Y(7).NE.0.0) GO TO 125
25  DO 5 I=3,4
      AD(I)=A5+Y(I)*(A4+Y(I)*(A3+Y(I)*(A2+Y(I)*(A1+Y(I)*A0))))
      E(I)=Y(I)*(2.*A(6)+Y(I)*(3.*A(5)+Y(I)*(4.*A(4)+Y(I)*(5.*A(3)+
1Y(I)*6.*A(2)))))
      AA(I)=AD(I)/E(I)
      BD(I)=B5+Y(I)*(B4+Y(I)*(B3+Y(I)*(B2+Y(I)*(B1+Y(I)*B0))))
      CD(I)=Y(I)*(C4+Y(I)*(C3+Y(I)*(C2+Y(I)*(C1+Y(I)*C0))))
      BB(I)=BD(I)/E(I)
      CC(I)=CD(I)/E(I)
      AAY(I)=AA(I)*Y(I)/TOU
      BBY(I)=BB(I)*Y(I)/TOU
50  CONTINUE
      PRINT 35
3500 FORMAT(/7X,*AA(1),AA(2)=*,17X,*AA(3)=*,11X,*AA(4)=*,11X,
1*AA(5)=*,11X,*AA(6)=*)
      PRINT 3550,RA,A1A,(AA(I),I=3,6)
3550 FORMAT(/12X,F8.5,*+/-1*,F8.5,9X,4(5X,F8.5,5X))

```


1050 CONTINUE

COSA=COS(SIGMA*Y(5)+WA)
 COSB=COS(SIGMA*Y(5)+WB)
 COSC=COS(SIGMA*Y(5)+WC)
 COSP=COS(SIGMA*Y(5)+WA+WAA)
 COSR=COS(SIGMA*Y(5)+WB+WAA)
 EXPR=EXP(SIGMA*Y(1))
 PHI=AKA*EXPR*COSA+SUM+AA(5)*SIGMA+AA(6)
 PSI=BKB*EXPR*COSB+SMP+BB(5)*SIGMA+BB(6)
 BETA=CKC*EXPR*COSC+TDT+CC(5)
 ROLVEL=AKAA*EXPR*COSP+SUMP+AAY(5)
 YAWVEL=AKAB*EXPR*COSR+SMUP+BBY(5)
 PHID(LICK)=PHI*180./PI
 PSID(LICK)=PSI*180./PI
 BLTAD(LICK)=BETA*180./PI
 ROVELD(LICK)=ROLVEL*180./PI
 YAWELD(LICK)=YAWVEL*180./PI
 TI(LICK)=1
 T=T+.5

104 CONTINUE

GO TO 65

115 DO 105 I=1,2

AO(I)=A5+Y(I)*(A4+Y(I)*(A3+Y(I)*(A2+Y(I)*(A1+Y(I)*AO))))
 E(I)=Y(I)*(2.*A(6)+Y(I)*(3.*A(5)+Y(I)*(4.*A(4)+Y(I)*(5.*A(3)+
 Y(I)*6.*A(2))))
 AA(I)=AO(I)/E(I)
 BO(I)=B5+Y(I)*(B4+Y(I)*(B3+Y(I)*(B2+Y(I)*(B1+Y(I)*BO))))
 BE(I)=BO(I)/E(I)
 CO(I)=Y(I)*(C4+Y(I)*(C3+Y(I)*(C2+Y(I)*(C1+Y(I)*CO))))
 CE(I)=CO(I)/E(I)
 AAY(I)=AA(I)*Y(I)/TOU
 BBY(I)=BB(I)*Y(I)/TOU

105 CONTINUE

125 R1=Y(2)

R2=Y(3)**2-Y(7)**2
 R3=Y(3)**3-3.*Y(3)*Y(7)**2
 R4=Y(3)**4-6.*(Y(3)*Y(7))**2+Y(7)**4
 R5=Y(3)**5-10.*Y(3)**3*Y(7)**2+5.*Y(3)*Y(7)**4
 A11=Y(7)
 A12=2.*Y(7)*Y(3)
 A13=3.*Y(3)**2*Y(7)-Y(7)**3
 A14=4.*(Y(3)**3*Y(7)-Y(3)*Y(7)**3)
 A15=(5.*Y(3)**4-10.*(Y(3)*Y(7))**2+Y(7)**4)*Y(7)
 AX1=AO*R5+A1*R4+A2*R3+A3*R2+A4*R1+A5
 AY1=AO*A15+A1*A14+A2*A13+A3*A12+A4*A11
 X2=6.*A(2)*R5+5.*A(3)*R4+4.*A(4)*R3+3.*A(5)*R2+2.*A(6)*R1
 Y2=6.*A(2)*A15+5.*A(3)*A14+4.*A(4)*A13+3.*A(5)*A12+2.*A(6)*A11
 Z=X2**2+Y2**2
 RAD=(AX1*X2+AY1*Y2)/Z
 AIAD=(X2*AY1-AX1*Y2)/Z
 BX1=BO*R5+B1*R4+B2*R3+B3*R2+B4*R1+B5
 BY1=BO*A15+B1*A14+B2*A13+B3*A12+B4*A11
 RBD=(BX1*X2+BY1*Y2)/Z
 BIBD=(X2*BY1-BX1*Y2)/Z
 CX1=CO*R5+C1*R4+C2*R3+C3*R2+C4*R1

```

CY1=CO*AI5+C1*AI4+C2*AI3+C3*AI2+C4*AI1
RCD=(CX1*X2+CY1*Y2)/Z
CICD=(X2*CY1-CX1*Y2)/Z
AKAD=2.*SQRT(RAD**2+AIAD**2)
BKBD=2.*SQRT(RBD**2+BIBD**2)
CKCD=2.*SQRT(RCD**2+CICD**2)
CALL ARCTAN(RAD,AIAD,WAD)
CALL ARCTAN(RBD,BIBD,WBD)
CALL ARCTAN(RCD,CICD,WCD)
YAKAD=SQRT(Y(3)**2+Y(7)**2)/TOU
CALL ARCTAN(Y(3),Y(7),WAAD)
AKAAD=AKAD*YAKAD
AKABD=BKBD*YAKAD
IF(Y(5).EQ.0.0) GO TO 65)
6 PRINT 4400
+400 FORMAT(//17X,*AA(1),AA(2)=*,17X,*AA(3),AA(4)=*,17X,*AA(5)=*,11X,
1 *AA(6)=*)
PRINT 445,RA,AIA,RAD,AIAD,AA(5),AA(6)
+50 FORMAT(//5X,2(5X,F3.5,*+/-1*,F8.5,5X),10X,2(F6.5,5X))
PRINT 450
+500 FORMAT(//17X,*BB(1),BB(2)=*,17X,*BB(3),BB(4)=*,17X,*BB(5)=*,11X,
1 *BB(6)=*)
PRINT 4450,RB,BIB,RBD,BIBD,BB(5),BB(6)
PRINT 460
+600 FORMAT(//17X,*CC(1),CC(2)=*,17X,*CC(3),CC(4)=*,17X,*CC(5)=*)
PRINT 4450,RC,CIC,RCD,CICD,CC(5)
PRINT 4700
+700 FORMAT(//10X,*AAY(5)=*,11X,*BBY(5)=*)
PRINT 4750,AAY(5),BBY(5)
475 FORMAT(5X,2(5X,F8.5,5X))
PRINT 3007
PRINT 300
PRINT 3001
PRINT 3001
PRINT 3007
PRINT 37,AKA,Y(1),Y(5),WA,AKAD,Y(3),Y(7),WAD,AA(5),AA(6)
PRINT 37,BKB,Y(1),Y(5),WB,BKBD,Y(3),Y(7),WBD,BB(5),BB(6)
PRINT 290,CKC,Y(1),Y(5),WC,CKCD,Y(3),Y(7),WCD,CC(5)
PRINT 300,AKAA,Y(1),Y(5),WA,WAA,AKAAD,Y(3),Y(7),WAD,WAAD,AAY(5)
PRINT 300,AKAB,Y(1),Y(5),WB,WAA,AKABD,Y(3),Y(7),WBD,WAAD,BBY(5)
270 FORMAT(//5X,*.....=*,2(5X,F10.6,*EXP(SIGMA*,F10.6,*)CCS(
1 SIGMA*,F10.6, 1H+,F10.6,2H)+/),F10.6,*SIGMA*,F10.6)
290 FORMAT(//5X,*.....=*,2(5X,F10.6,*EXP(SIGMA*,F10.6,*)CCS(
1 SIGMA*,F10.6, 1H+,F10.6,2H)+/),F10.6)
3000 FORMAT(//5X,*.....=*,2(5X,F10.6,*EXP(SIGMA*,F10.6,*)CCS(
1 SIGMA*,F10.6,2(1H+,F10.6),2H)+/),F10.6)
1065 Y=0.0
DO 106 KICK=1,120
SIGMA=T/TOU
COSA=COS(SIGMA*Y(5)+WA)
COSB=COS(SIGMA*Y(5)+WB)
COSC=COS(SIGMA*Y(5)+WC)
COSPS=COS(SIGMA*Y(5)+WA+WAA)
COSRS=COS(SIGMA*Y(5)+WB+WAA)
EXPR=EXP(SIGMA*Y(1))

```

```

COSAD=CCS(SIGMA*Y(7)+WAD)
COSBD=CCS(SIGMA*Y(7)+WBD)
COSCD=CCS(SIGMA*Y(7)+WCD)
COSPD=CCS(SIGMA*Y(7)+WAD+WAAD)
COSRD=CCS(SIGMA*Y(7)+WBD+WAAD)
EXPRD=EXP(SIGMA*Y(3))
PHI=AKA*EXPR*COSA+A4(5)*SIGMA+AA(6)+AKAD*EXPRD*COSAD
PSI=BKB*EXPR*COSP+BB(5)*SIGMA+BB(6)+BKBD*EXPRD*COSBD
BETA=CKC*EXPR*COSC+CC(5)+CKCD*EXPRD*COSCD
ROLVEL=AKA*EXPR*COSP+AAY(5)+AKAAD*EXPRD*COSPD
YAWVEL=AK-B*EXPR*COSR+BHY(5)+AKABD*EXPRD*COSRD
PHID(KICK)=PHI*180./PI
PSID(KICK)=PSI*180./PI
BETAD(KICK)=BETA*180./PI
ROLVELD(KICK)=ROLVEL*180./PI
YAWVELD(KICK)=YAWVEL*180./PI
T1(KICK)=1
T=T+0.05
306  CONTINUE
GO TO 65
650  PRINT 3900
3900  FORMAT(/10X,*AA(1)=*,11X,*AA(2)=*,17X,*AA(3),AA(4)=*,17X,
,*AA(5)=*,11X,*AA(6)=*)
PRINT 3950,AA(1),AA(2),RAD,AIAD,AA(5),AA(6)
3950  FORMAT(/5X,2(5X,F8.5,5X),F8.5,*+-1*,F8.5,10X,2(5X,F8.5,5X))
PRINT 4000
4000  FORMAT(/10X,*BB(1)=*,11X,*BB(2)=*,17X,*BB(3),BB(4)=*,17X,
,*BB(5)=*,11X,*BB(6)=*)
PRINT 3950,BB(1),BB(2),RBD,BIBD,BB(5),BB(6)
PRINT 4100
4100  FORMAT(/10X,*CC(1)=*,11X,*CC(2)=*,17X,*CC(3),CC(4)=*,17X,
,*CC(5)=*)
PRINT 3950,CC(1),CC(2),RCD,CICD,CC(5)
PRINT 4200
4200  FORMAT(/10X,*AAY(1)=*,11X,*AAY(2)=*,11X,*AAY(5)=*)
PRINT 3950,AAY(1),AAY(2),AAY(5)
PRINT 4300
4300  FORMAT(/10X,*BBY(1)=*,11X,*BBY(2)=*,11X,*BBY(5)=*)
PRINT 3950,BBY(1),BBY(2),BBY(5)
PRINT 3017
PRINT 3001
PRINT 3027
PRINT 38 , (AA(I),Y(I),I=1,2),AKAD,Y(3),Y(7),WAD,AA(5),AA(6)
PRINT 38 , (BB(I),Y(I),I=1,2),BKBD,Y(3),Y(7),WBD,BB(5),BB(6)
PRINT 390 , (CC(I),Y(I),I=1,2),CKCD,Y(3),Y(7),WCD,CC(5)
PRINT 400 , (AAY(I),Y(I),I=1,2),AKAAD,Y(3),Y(7),WAD,WAAD,AAY(5)
PRINT 400 , (BBY(I),Y(I),I=1,2),AKABD,Y(3),Y(7),WBD,WAAD,BBY(5)
380  FORMAT(/5X,*.....=*,2(F10.6,*EXP(SIGMA*,F10.6,*)+*)/
15X,F10.6,*EXP(SIGMA*,F10.6,*)COS(SIGMA*,F10.6, 1H+,F10.6 ,
2*)+*,F10.6,*SIGMA+*,F10.6)
390  FORMAT(/5X,*.....=*,2(F10.6,*EXP(SIGMA*,F10.6,*)+*)/
15X,F10.6,*EXP(SIGMA*,F10.6,*)COS(SIGMA*,F10.6, 1H+,F10.6 ,
2*)+*,F10.6)

```

```

400  FORMAT(//5X,*,.....=*,2(F10.6,*EXP(SIGMA*,F10.6,*)+*)/
15X,F10.6,*EXP(SIGMA*,F10.6,*)COS(SIGMA*,F10.6,2(1H+,F10.6),
2*))+*,F10.6)
1025  T=0.0
      DO 1020 KILL=1,12,
      SIGMA=T/T00
      SUM=0.0
      SUMP=0.0
      SMP=0.0
      SMUP=0.0
      TOT=0.0
      DO 1030 I=1,2
      P=SIGMA*Y(I)
      ZD(I)=EXP(P)
      BA(I)=AA(I)*ZD(I)
      BAA(I)=AA(I)*ZD(I)
      AB(I)=BB(I)*ZD(I)
      ABB(I)=BB(I)*ZD(I)
      BC(I)=CC(I)*ZD(I)
      SUM=SUM+BA(I)
      SUMP=SUMP+BAA(I)
      SMP=SMP+AB(I)
      SMUP=SMUP+ABB(I)
      TOT=TOT+BC(I)
1030  CONTINUE
      COSAD=CCS(SIGMA*Y(7)+WAD)
      COSBD=CCS(SIGMA*Y(7)+WBD)
      COSCD=CCS(SIGMA*Y(7)+WCD)
      COSPD=CCS(SIGMA*Y(7)+WAD+WAAD)
      COSRD=CCS(SIGMA*Y(7)+WBD+WAAD)
      XPRD=EXP(SIGMA*Y(3))
      PHI=AKAD*EXPRD*COSAD+SUM+AA(5)*SIGMA+AA(6)
      PSI=BKBD*EXPRD*COSBD+SMP+BB(5)*SIGMA+BB(6)
      BETA=CKCD*EXPRD*COSCD+TOT+CC(5)
      ROLVEL=AKAD*EXPRD*COSPD+SUMP+AAY(5)
      YAWVEL=AKBD*EXPRD*COSRD+SMUP+BBY(5)
      PHID(KILL)=PHI*180./PI
      PSID(KILL)=PSI*180./PI
      BETAD(KILL)=BETA*180./PI
      ROVELD(KILL)=ROLVEL*180./PI
      YAVELD(KILL)=YAWVEL*180./PI
      T1(KILL)=T
      T=T+0.05
1020  CONTINUE
65   CONTINUE
      PRINT 1500
      PRINT 3000
      PRINT 2365,(T1(J),PHID(J),PSID(J),BETAD(J),ROVELD(J),YAVELD(J),
1J=1,120)
      PRINT 1500
      DO52 I=1,120
      DO51 J=1,5
      NP(J)=120
      TIME(J,I)=T1(I)
      PARAM(I,I)=PHID(I)

```

```

PARAM(2,I)=PSID(I)
PARAM(3,I)=BETAD(I)
PARAM(4,I)=RQVELD(I)
PARAM(5,I)=YAVELD(I)
52  CONTINUE
CALL GRAFM(TIME,PARAM,5,NP)
PRINT 3027
PRINT 3001
PRINT 3011,BTDD
PRINT 3001
PRINT 3027
CALL GRAF(T1,BETAD,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3011
PRINT 3010,BTDD
PRINT 3001
PRINT 3027
CALL GRAF(T1,PHID,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3010
PRINT 3010,BTDD
PRINT 3001
PRINT 3027
CALL GRAF(T1,PSID,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3011
PRINT 3011,BTDD
PRINT 3001
PRINT 3027
CALL GRAF(T1,RQVELD,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3011
PRINT 3011,BTDD
PRINT 3001
PRINT 3027
CALL GRAF(T1,YAVELD,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3011
PRINT 3011,BTDD
PRINT 3001
PRINT 3027
165  CONTINUE
2101  FORMAT (5F13.6)
2301  FORMAT (5F7.4)
2501  FORMAT (3F5.5)
1900  FORMAT (1X,130(1H*))//)
40    FORMAT (//16X,*A=*,F11.5,5X,*B=*,F11.5,5X,*C=*,F11.5,5X,
1*D=*,F11.5,5X,*E=*,F11.5//)
2365  FORMAT (16XF7.4,7XF8.4,5XF8.4,7XF8.4,11XF8.4,16XF8.4)
3001  FORMAT (39X,1H*,52X,1H*)

```

```

3002  FORMAT(/60X*CESSNA 182*/60X10(1H-)//20X*MASS AND GEOMETRICAL CHAR
      IACTERISTICS*/20X36(1H-)//30X*WEIGHT*10X*MOMENT OF INERTIA*10X*SPAN
      2*10X*WING AREA*/30X*(LBS)*14X*(SLUGS SQ.FT)*11X*(FT)*11X*(SQ.FT)*
      346X*IXX*11X*IZZ**//30XF7.1,F14.1,F13.1,F15.2,F16.2)
3003  FORMAT(/20X*FLIGHT CONDITIONS*/20X17(1H-)//30X*VELOCITY*10X*DENSIT
      Y*10X* LIFT *10X* ANGLE OF *10X*FLIGHT PATH*/32X*(MPH)* 8X*(SLU
      2GS/CU.FT)*6X*COEFFICIENT*7X*ATTACK(DeG)*10X*ANGLE(DeG)*//32X,F6.1,F
      320.6,F17.3,F16.2,F18.2)
3004  FORMAT(/20X*STABILITY DERIVATIVES*/21X,20(1H-)//32X*SIDESLIP*12X*
      1ROLL RATE*12X*YAW RATE*13X*CONTROL*/30X*CYB=*F7.4,11X*CYP=*F7.4,10
      2X*CYR=*F7.4,10X*CYC=*F7.4/30X*CLB=*F7.4,11X*CLP=*F7.4,10X*CLR=*F7.
      34,10X*CLC=*F7.4/30X*CNB=*F7.4,11X*CNP=*F7.4,10X*CNR=*F7.4,10X*CNC=
      4*F7.4)
3007  FORMAT(/20X*INITIAL CONDITIONS*/20X18(1H-)//30X*ANGLES(DeG)*10X*R
      1ATES(DeG/SEC)*//30X*ROLL*F8.1,10X*ROLL*F6.1/30X*YAW*F9.1,10X*YAW*F7
      2.1/29X*SIDESLIP*F5.1)
3008  FORMAT(/20X*VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL*/
      140X51(1H-)/54X*AND YAW RATES WITH TIME*/54X23(1H-)/18X*TIME*10X*PH
      21*10X*PSI*10X*BETA*10X*ROLL VELOCITY*10X*YAW VELOCITY*/18X*(SEC)*8
      3Y*(DeG)*8X*(DeG)*8X*(DeG)*12X*(DeG/SEC)*14X*(DeG/SEC)*)
3005  FORMAT(1H, )
3006  FORMAT(1H, )
3009  FORMAT(39X,1H*,17X,*ROLL ANGLE VS TIME*,17X,1H*)
3010  FORMAT(39X,1H*,9X,*DISTURBANCE-- BETA=*,F6.2,*DEGREES*,11X,1H*)
3011  FORMAT(39X,1H*,17X,*YAW ANGLE VS TIME *,17X,1H*)
3012  FORMAT(39X,1H*,15X,*SIDESLIP ANGLE VS TIME*,15X,1H*)
3013  FORMAT(39X,1H*,14X,*ROLLING VELOCITY VS TIME*,14X,1H*)
3014  FORMAT(39X,1H*,14X,*YAWING VELOCITY VS TIME *,14X,1H*)
3022  FORMAT(39X,1H*,6X*COEFFICIENTS OF CHARACTERISTIC EQUATION *6X1H*)
3023  FORMAT(39X,1H*,16X,*EQUATIONS OF MOTION *,16X,1H*)
3027  FORMAT(39X,54(1H*))
      STOP
      END

```

```

C
      SUBROUTINE QUART (A,Y)
C      THIS PROGRAMME CALLED SUBROUTINE QUART SOLVES QUARTIC EQUATIONS
C      BY CALLING THE CUBIC AND QUADRATIC SUBROUTINES
      DIMENSION A(6),Y(8),AC(4),AQ(3),BQ(3),RT(3)
      EQUIVALENCE(AQ,BQ)
      C3=A(3)/A(2)
      C2=A(4)/A(2)
      C1=A(5)/A(2)
      C0=A(6)/A(2)
      C=C3/2.
      AC(1)=1.
      AC(2)=-C2
      AC(3)=C1*C3-4.*C0
      AC(4)=C0*(4.*C2-C3**2)-C1**2
      CALL CUBIC(AC,RT,RTI)
      IF(RTI) 11,12,12
10      IF(RT(1)-RT(2)) 11,12,12
11      RT(1)=RT(2)
12      IF(RT(1)-RT(3)) 13,20,20
13      RT(1)=RT(3)
20      B=RT(1)/2.

```

```

      IF(B**2-C.) 22,22,24
22   D=0.
      CA=SQRT(C*C+2.*B-C2)
      GO TO 25
24   D=SQRT(B*B-C.)
      CA=-(C1/2.-C*B)/D
25   AQ(1)=1.
      AQ(2)=C-C.
      AQ(3)=B-D
      CALL QUAD(AQ,Y(1),Y(2),Y(5))
      BQ(2)=C+C.
      BQ(3)=B+D
      CALL QUAD(BQ,Y(3),Y(4),Y(7))
      Y(5)=-Y(5)
      Y(8)=-Y(7)
      PRINT 65,Y(1),Y(5),Y(2),Y(6)
      PRINT 65,Y(3),Y(7),Y(4),Y(8)
65   FORMAT(//10X,*THE ROOTS ARE*,E15.8,2H+I,E15.8//24X,E15.8,2H+I,
1015.8)
      RETURN
      END

C
      SUBROUTINE CUBIC (A,XR,XI)
C   THIS SUBROUTINE SOLVES CUBIC EQUATIONS AND IS CALLED BY THE SUB Q
C   ROUTINE QUARTIC AND IN ITS TURN CALLS SUBROUTINE QUAD.
      DIMENSION A(4),XR(3),AQ(2)
      IPATH=2
      EX=1./3.
      IF(A(4)) 1006,1014,1006
1004  XR(1)=0.0
      GO TO 1021
1006  A2=A(1)**2
      Q=(27.*A2*A(4)-9.*A(1)*A(2)*A(3)+2.*A(2)**3)/(54.*A2*A(1))
      IF(Q) 1010,1008,1014
1008  Z=0.0
      GO TO 1031
1010  Q=-Q
      IPATH=1
1014  P=(3.*A(1)*A(3)-A(2)**2)/(9.*A2)
      ARG=P**3+Q*Q
      IF(ARG) 1016,1018,1021
1016  Z=-2.*SQRT(-P)*COS(ATAN(SQRT(-ARG)/Q)/3.)
      GO TO 1023
1018  Z=-2.*Q**EX
      GO TO 1021
1020  SARG=SQRT(ARG)
      IF(P) 1022,1024,1026
1022  Z=-(Q+SARG)**EX-(Q-SARG)**EX
      GO TO 1021
1024  Z=-(2.*Q)**EX
      GO TO 1021
1026  Z=(SARG-Q)**EX-(SARG+Q)**EX
1028  GO TO (1010,1032),IPATH
1030  Z=-Z
1032  XR(1)=(3.*A(1)*Z-A(2))/(3.*A(1))

```



```

1034 AQ(1)=A(1)
      AQ(2)=A(2)+XR(1)*A(1)
      AQ(3)=A(3)+XR(1)*AQ(2)
      CALL QUAD(AQ,XR(2),XR(3),X1)
      RETURN
      END

```

```

C
      SUBROUTINE QUAD(A,XR1,XR2,X1)
C      THIS SUBROUTINE SOLVES QUADRATIC EQUATIONS AND IS CALLED BY BOTH
C      THE QUARTIC AND CUBIC SUBROUTINES
      DIMENSION A(3)
      X1=-A(2)/(2.*A(1))
      DISC=X1**2-A(3)/A(1)
      IF (DISC) 10,20,20
10     X2=SQRT(-DISC)
      XR1=X1
      XR2=X1
      X1=X2
      GO TO 30
20     X2=SQRT(DISC)
      XR1=X1+X2
      XR2=X1-X2
      X1=1.
30     RETURN
      END

```

```

C
      SUBROUTINE ARCTAN (X,Y,Z)
C      PROGRAMME TO EVALUATE ARCTAN Z AND TO DETERMINE THE PROPR QUADRANT
      PI=3.141592653589793
      Z= ATAN (ABS(Y/X))
      ZD=Z*180./PI
      IF (Y) 20,20,30
20     IF (X) 15,25,35
25     Z=Z+PI
      ZD=ZD+180.
      GO TO 10
35     Z=2.*PI-Z
      ZD=360.-ZD
      GO TO 30
30     IF (X) 40,40,50
40     Z=PI-Z
      ZD=180.-ZD
50     PRINT 45,Z,ZD
45     FORMAT(5X,2(F9.4,5X))
      RETURN
      END


```

C **** THE PLCT SUBROUTINES 'GRAF' AND GRAPHM ARE GIVEN IN APPENDIX 'E'.

APPENDIX 'D'

FLOW CHART OF SOLUTION OF LATERAL
EQUATIONS OF MOTION BY FOURTH ORDER
RUNGE-KUTTA METHOD

FLOW CHART FOR SOLUTION OF LATERAL EQUATIONS OF MOTION BY FOURTH ORDER RUNGE-KUTTA METHOD

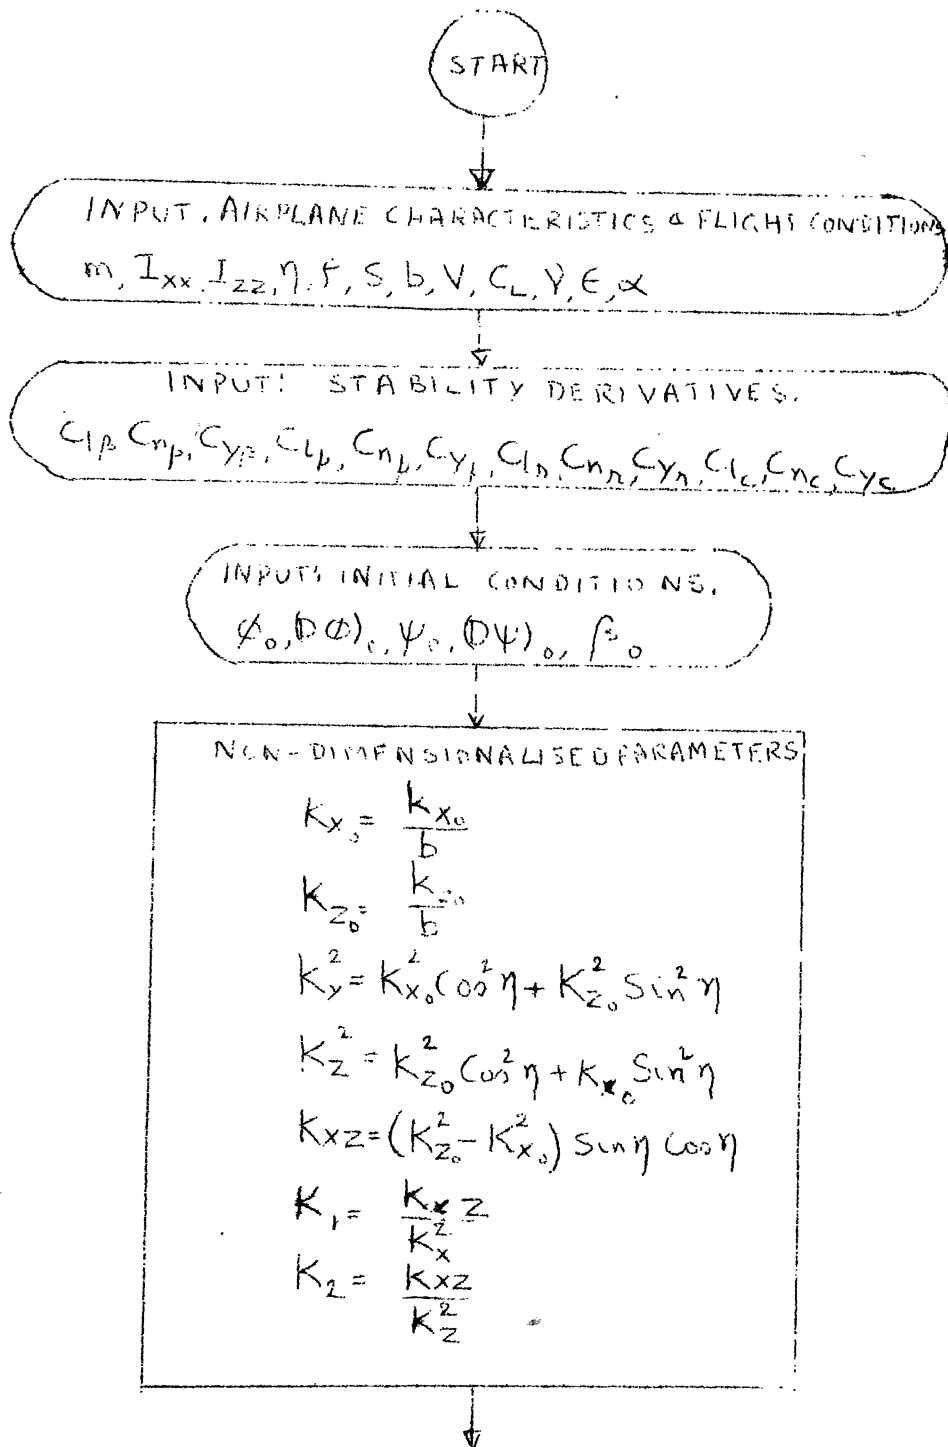

$$\begin{aligned}\tau &= m/55V \\ \sigma &= t/\tau \\ \mu &= m/556\end{aligned}$$

$$\begin{aligned}l_p &= \frac{\mu}{2K_x^2} C_{lp} \\ n_p &= \frac{\mu}{2K_x^2} C_{np} \\ y_p &= \frac{1}{2} C_{yp} \\ i_p &= \frac{1}{4K_x^2} C_{ip} \\ n_p &= \frac{1}{4K_x^2} C_{np} \\ y_p &= \frac{1}{4\mu} C_{yp} \\ l_n &= \frac{1}{4K_x^2} C_{ln} \\ n_n &= \frac{1}{4K_x^2} C_{nn} \\ y_n &= \frac{1}{4\mu} C_{yn} \\ l_c &= \frac{\mu}{2K_x^2} C_{lc} \\ n_c &= \frac{\mu}{2K_x^2} C_{nc} \\ y_c &= \frac{1}{2} C_{yc}\end{aligned}$$

DEFINE THE FUNCTIONS & COEFFICIENTS

$$\text{DEN} = 1 - k_1 k_2$$

$$C_1 = (l_p - k_1 n_p) / \text{DEN}$$

$$C_2 = (l_n - k_1 n_n) / \text{DEN}$$

$$C_3 = (l_\beta - k_1 n_\beta) / \text{DEN}$$

$$C_4 = (l_c - k_1 n_c) / \text{DEN}$$

$$D_1 = (n_p - k_2 l_p) / \text{DEN}$$

$$D_2 = (n_n - k_2 l_n) / \text{DEN}$$

$$D_3 = (n_\beta - k_2 l_\beta) / \text{DEN}$$

$$D_4 = (n_c - k_2 l_c) / \text{DEN}$$

$$E_1 = y_p$$

$$E_2 = y_{cn} - 1$$

$$E_3 = y_\beta$$

$$E_4 = y_c$$


$$E_5 = 0.5 C_L$$

$$E_6 = 0.5 C_L \tan \gamma$$

$$F_1(U, V, W, X, Y, Z) = C_1 U + C_2 V + C_3 W + C_4$$

$$F_2(U, V, W, X, Y, Z) = D_1 U + D_2 V + D_3 W + D_4$$

$$F_3(U, V, W, X, Y, Z) = E_1 U + E_2 V + E_3 W + E_4 + E_5 Y + E_6 Z$$

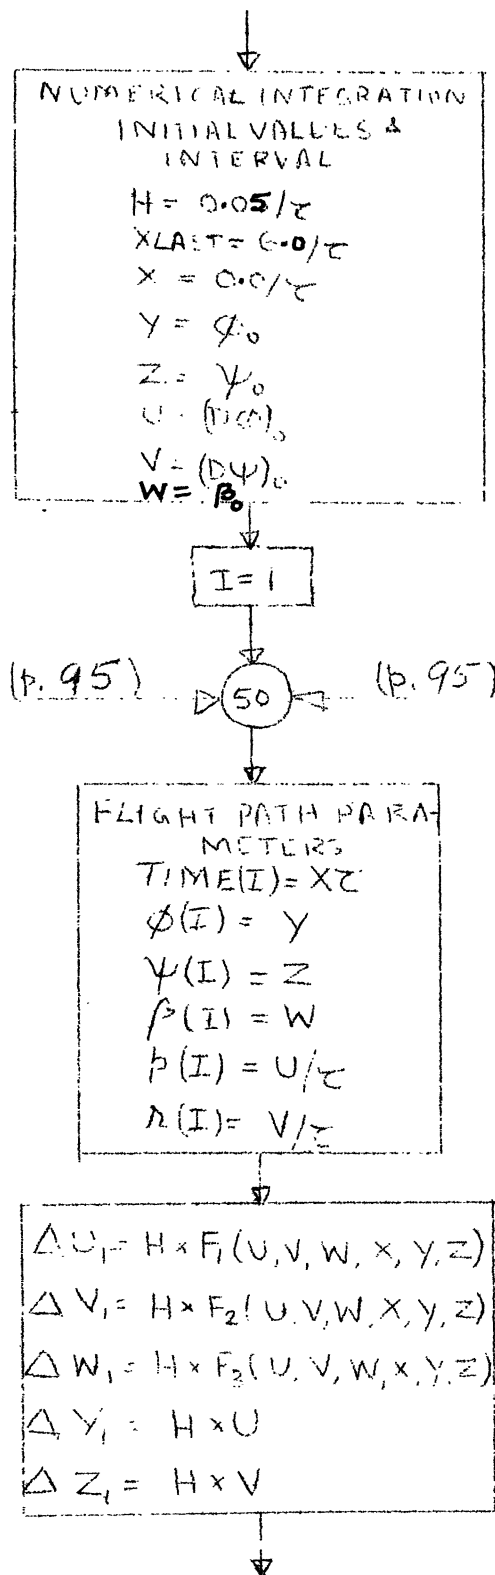


$$\begin{aligned}\Delta U_2 &= H \times F_1(U + \Delta U_1, V + \Delta V_1, W + \Delta W_1, X + H/2, Y + \Delta Y_1, Z + \Delta Z_1) \\ \Delta V_2 &= H \times F_2(U + \Delta U_1, V + \Delta V_1, W + \Delta W_1, X + H/2, Y + \Delta Y_1, Z + \Delta Z_1) \\ \Delta W_2 &= H \times F_3(U + \Delta U_1, V + \Delta V_1, W + \Delta W_1, X + H/2, Y + \Delta Y_1, Z + \Delta Z_1) \\ \Delta Y_2 &= H \times (U + \Delta U_1) \\ \Delta Z_2 &= H \times (V + \Delta V_1)\end{aligned}$$

$$\begin{aligned}\Delta U_3 &= H \times F_1(U + \Delta U_2, V + \Delta V_2, W + \Delta W_2, X + H/2, Y + \Delta Y_2, Z + \Delta Z_2) \\ \Delta V_3 &= H \times F_2(U + \Delta U_2, V + \Delta V_2, W + \Delta W_2, X + H/2, Y + \Delta Y_2, Z + \Delta Z_2) \\ \Delta W_3 &= H \times F_3(U + \Delta U_2, V + \Delta V_2, W + \Delta W_2, X + H/2, Y + \Delta Y_2, Z + \Delta Z_2) \\ \Delta Y_3 &= H \times (U + \Delta U_2) \\ \Delta Z_3 &= H \times (V + \Delta V_2)\end{aligned}$$

$$\begin{aligned}\Delta U_4 &= H \times F_1(U + \Delta U_3, V + \Delta V_3, W + \Delta W_3, X + H, Y + \Delta Y_3, Z + \Delta Z_3) \\ \Delta V_4 &= H \times F_2(U + \Delta U_3, V + \Delta V_3, W + \Delta W_3, X + H, Y + \Delta Y_3, Z + \Delta Z_3) \\ \Delta W_4 &= H \times F_3(U + \Delta U_3, V + \Delta V_3, W + \Delta W_3, X + H, Y + \Delta Y_3, Z + \Delta Z_3) \\ \Delta Y_4 &= H \times (U + \Delta U_3) \\ \Delta Z_4 &= H \times (V + \Delta V_3)\end{aligned}$$

$$\begin{aligned}X &= X + H \\ Y &= Y + \frac{1}{6}(\Delta Y_1 + 2\Delta Y_2 + 2\Delta Y_3 + \Delta Y_4) \\ Z &= Z + \frac{1}{6}(\Delta Z_1 + 2\Delta Z_2 + 2\Delta Z_3 + \Delta Z_4) \\ U &= U + \frac{1}{6}(\Delta U_1 + 2\Delta U_2 + 2\Delta U_3 + \Delta U_4) \\ V &= V + \frac{1}{6}(\Delta V_1 + 2\Delta V_2 + 2\Delta V_3 + \Delta V_4) \\ W &= W + \frac{1}{6}(\Delta W_1 + 2\Delta W_2 + 2\Delta W_3 + \Delta W_4)\end{aligned}$$

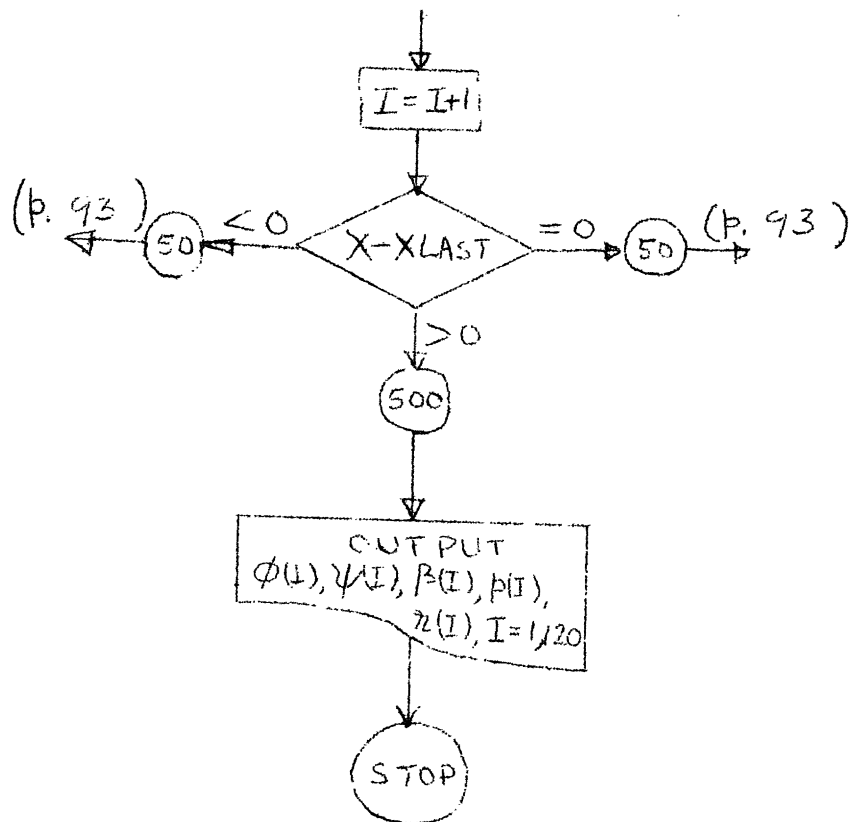

APPENDIX 'E'

DIGITAL COMPUTER PROGRAMME LISTING FOR
SOLUTION OF LATERAL EQUATIONS OF MOTION
BY FOURTH ORDER RUNGE-KUTTA METHOD

```

C **** THIS PROGRAMME SOLVES THE LATERAL EQUATIONS OF MOTION OF AN AIR-
C **** PLANE BY FOURTH ORDER RUNGE-KUTTA METHOD AND PREDICTS THE TIME
C **** HISTORY OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL AND YAW RATES.
COMMON/VAM1/C1,C2,C3,C4
COMMON/VAM2/D1,D2,D3,D4
COMMON/VAM3/E1,E2,E3,E4,E5,E6
DIMENSION TIME(5,125),PARAM(5,125),NP(5)
DIMENSION PHID(200),PSID(200),BETAD(200),ROVELD(200),YAVELD(200),
LT1(200)
COMMON/GPHM/ISCALE,NPLCT,NOPRNT,IHSIZE,JVSIZE
NPLCT=1
IHSIZE=12
JVSIZE=8
NOPRNT=1
READ 2101,WEIT,XIKO,ZIKO,SPAN,AREA
READ 2301,PHIO,DPHIO,PSIO,DPSIO,BTDO
2301 FORMAT (5F7.4)
DO 650 L=1,2
READ 2101,VELM,RHO,EPD,ALFAD,GAMMAD
2101 FORMAT (5F13.6)
DO 65 LJK=1,2
READ 2501,CLB,CNB,CYB
READ 2501,CLP,CNP,CYP
READ 2501,CLR,CNR,CYR
READ 2501,CLC,CNC,CYC
2501 FORMAT (3F8.5)
1900 FORMAT (1X,130(1H*))//)
GRTY=32.2
PI=4.*ATAN(1.)
PID=180./PI
AMASS=WEIT/GRTY
ETA=(ALFAD-EPD)/PID
GAMMA=GAMMAD/PID
BTAD=BTDO/PID
VEL=VELM*88./60.
CL=2.*WEIT/(RHO*VEL**2*AREA)
CLG=.5*CL*TAN(GAMMA)
XKO=SQRT(XIKO/AMASS)
ZKO=SQRT(ZIKO/AMASS)
XXK=((XKO*COS(ETA))**2+(ZKO*SIN(ETA))**2)/(SPAN**2)
ZZK=((ZKO*COS(ETA))**2+(XKO*SIN(ETA))**2)/(SPAN**2)
XZK=((ZKO**2-XKO**2)*SIN(ETA)*COS(ETA))/(SPAN**2)
AK1=XZK/XXK
AK2=XZK/ZZK
TOU=AMASS/(RHO*AREA*VEL)
AMU=AMASS/(RHO*AREA*SPAN)
SLB=.5*AMU/XXK*CLB
SLP=.25*CLP/XXK
SLR=.25*CLR/XXK
SLC=.5*AMU/XXK*CLC
SNB=.5*AMU/ZZK*CNB
SNP=.25*CNP/ZZK
SNR=.25*CNR/ZZK
SNC=.5*AMU/ZZK*CNC

```

```

YB=.5 *CYB
YP=.25*CYP/AMU
YR=.25*CYR/AMU
YC=.5*CYC
DEN=1.-AK1*AK2
C1=(SLP-AK1*SNP)/DEN
C2=(SLR-AK1*SNR)/DEN
C3=(SLB-AK1*SNB)/DEN
C4=(SLC-AK1*SNC)/DEN
D1=(SNP-AK2*SLP)/DEN
D2=(SNR-AK2*SLR)/DEN
D3=(SNB-AK2*SLB)/DEN
D4=(SNC-AK2*SLC)/DEN
E1=YP
E2=YR-1.
E4=YC
E3=YB
E5=.5*CL
E6=CLG
H=0.05/TOU
XLAST=6.0/TOU
X=0.0/TCU
U=DPHIO
V=DPSIO
W=BTAO
Y=PHIO
Z=PSIO
I=1
50  T1(I)=X*TOU
    PHID(I)=Y*PID
    PSID(I)=Z*PID
    BETAD(I)=W*PID
    ROVELD(I)=U*PID/TOU
    YAVELD(I)=V*PID/TOU
    DD51 J=1,3
    NP(J)=120
51  TIME(J,I)=T1(I)
    PARAM(1,I)=PHID(I)
    PARAM(2,I)=PSID(I)
    PARAM(3,I)=BETAD(I)
    PARAM(4,I)=ROVELD(I)
    PARAM(5,I)=YAVELD(I)
    DELU1=H*F1(U,V,W,X,Y,Z)
    DELV1=H*F2(U,V,W,X,Y,Z)
    DELW1=H*F3(U,V,W,X,Y,Z)
    DELY1=H*U
    DELZ1=H*V
    DELU2=H*F1(U+DELU1/2.,V+DELV1/2.,W+DELW1/2.,X+H/2.,Y+DELY1/2.,
1Z+DELZ1/2.)
    DELV2=H*F2(U+DELU1/2.,V+DELV1/2.,W+DELW1/2.,X+H/2.,Y+DELY1/2.,
1Z+DELZ1/2.)
    DELW2=H*F3(U+DELU1/2.,V+DELV1/2.,W+DELW1/2.,X+H/2.,Y+DELY1/2.,
1Z+DELZ1/2.)
    DELY2=H*(U+DELU1/2.)
    DELZ2=H*(V+DELV1/2.)

```

```

DELU3=H*F1(U+DELU2/2.,V+DELV2/2.,W+DELW2/2.,X+H/2.,Y+DELY2/2.,
LZ+DELZ2/2.)
DELV3=H*F2(U+DELU2/2.,V+DELV2/2.,W+DELW2/2.,X+H/2.,Y+DELY2/2.,
LZ+DELZ2/2.)
DELW3=H*F3(U+DELU2/2.,V+DELV2/2.,W+DELW2/2.,X+H/2.,Y+DELY2/2.,
LZ+DELZ2/2.)
DELY3=H*(U+DELU2/2.)
DELZ3=H*(V+DELV2/2.)
DELU4=H*F1(U+DELU3,V+DELV3,W+DELW3,X+H,Y+DELY3,Z+DELZ3)
DELV4=H*F2(U+DELU3,V+DELV3,W+DELW3,X+H,Y+DELY3,Z+DELZ3)
DELW4=H*F3(U+DELU3,V+DELV3,W+DELW3,X+H,Y+DELY3,Z+DELZ3)
DELY4=H*(U+DELU3)
DELZ4=H*(V+DELV3)
X=X+H
U=U+(DELU1+2.*DELU2+2.*DELU3+DELU4)/6.
V=V+(DELV1+2.*DELV2+2.*DELV3+DELV4)/6.
W=W+(DELW1+2.*DELW2+2.*DELW3+DELW4)/6.
Y=Y+(DELY1+2.*DELY2+2.*DELY3+DELY4)/6.
Z=Z+(DELZ1+2.*DELZ2+2.*DELZ3+DELZ4)/6.
I=I+1
IF(X-XLAST) 50,50,500
500 CONTINUE
PRINT 3005
PRINT 3002,WEIT,XIKO,ZIKO,SPAN,AREA
PRINT 3003,VELM,RHO,CL,ALFAD,GAMMAD
PRINT 3004,CYB,CYP,CYR,CYC,CLB,CLP,CLR,CLC,CNB,CNP,CNR,CNC
PRINT 3007,PHID,DPHID,PSID,DPSID,BTDO
PRINT 3006
PRINT 1900
PRINT 3008
PRINT 2365,(T1(J),PHID(J),PSID(J),BETAD(J),ROVELD(J),YAVELD(J),
IJ=1,120)
PRINT 1900
CALL GRAPHM(TIME,PARAM,5,NP)
PRINT 3027
PRINT 3001
PRINT 3010,BTDO
PRINT 3001
PRINT 3027
CALL GRAF(T1,BETAD ,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3012
PRINT 3010,BTDO
PRINT 3001
PRINT 3027
CALL GRAF(T1,PHID ,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3009
PRINT 3010,BTDO
PRINT 3001
PRINT 3027
CALL GRAF(T1,PSID ,120,120,0,12,9)
PRINT 3027

```

```

PRINT 3001
PRINT 3011
PRINT 3010,BTDO
PRINT 3001
PRINT 3027
CALL GRAF(T1,ROVELD,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3013
PRINT 3010,BTDO
PRINT 3001
PRINT 3027
CALL GRAF(T1,YAVELD,120,120,0,12,9)
PRINT 3027
PRINT 3001
PRINT 3014
PRINT 3010,BTDO
PRINT 3001
PRINT 3027
65 CONTINUE
650 CONTINUE
3001 FORMAT(39X,1H*,52X,1H*)
3002 FORMAT(//60X*CESSNA 182*/60X10(1H-)//20X*MASS AND GEOMETRICAL CHARACTERISTICS*/20X36(1H-)//30X*WEIGHT*10X*MOMENT OF INERTIA*10X*SPAN*10X*WING AREA*/30X*(LBS)*14X*(SLUGS SQ.FT)*11X*(FT)*11X*(SQ.FT)*346X*IXX*11X*IZZ*/30XF7.1,F14.1,F15.1,F15.2,F16.2)
3003 FORMAT(//20X*FLIGHT CONDITIONS*/20X17(1H-)//30X*VELOCITY*10X*DENSITY*10X* LIFT *10X* ANGLE OF *10X*FLIGHT PATH*/32X*(MPH)* 8X*(SLUGS/CU.FT)*6X*COEFFICIENT*7X*ATTACK(DEG)*10X*ANGLE(DEG)*32X,F6.1,F320.6,F17.3,F16.2,F15.2)
3004 FORMAT(//20X*STABILITY DERIVATIVES*/21X,20(1H-)//32X*SIDESLIP*12X*ROLL RATE*12X*YAW RATE*10X*CONTROL*/30X*CYB=*F7.4,11X*CYP=*F7.4,102X*CYR=*F7.4,10X*CYC=*F7.4/30X*CLB=*F7.4,11X*CLP=*F7.4,10X*CLR=*F7.4,10X*CLC=*F7.4/30X*CNB=*F7.4,11X*CNP=*F7.4,10X*CNR=*F7.4,10X*CNL=*F7.4)
3007 FORMAT(//20X*INITIAL CONDITIONS*/20X18(1H-)//30X*ANGLES(DEG)*10X*RATES(DEG/SEC)*30X*ROLL*F8.1,10X*ROLL*F6.1/30X*YAW*F9.1,10X*YAW*F72.1/29X*SIDESLIP*F5.1)
3008 FORMAT(//40X*VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL*/140X51(1H-)//54X*AND YAW RATES WITH TIME*/54X23(1H-)//18X*TIME*10X*PH21*10X*PSI*10X*BETA*10X*ROLL VELOCITY*10X*YAW VELOCITY*/18X*(SEC)*89X*(DEG)*8X*(DEG)*8X*(DEG)*12X*(DEG/SEC)*14X*(DEG/SEC)*)
2365 FORMAT(16XF7.4,7XF8.4,5XF8.4,7XF8.4,11XF8.4,16XF8.4)
3005 FORMAT(1H1)
3006 FORMAT(1H0)
3009 FORMAT(39X,1H*,17X,*ROLL ANGLE VS TIME*,.7X,1H*)
3010 FORMAT(39X,1H*,9X,*DISTURBANCE-- BETA=*,F6.2,*DEGREES*,11X,1H*)
3011 FORMAT(39X,1H*,17X,*YAW ANGLE VS TIME *,17X,1H*)
3012 FORMAT(39X,1H*,15X,*SIDESLIP ANGLE VS TIME*,15X,1H*)
3013 FORMAT(39X,1H*,14X,*ROLLING VELOCITY VS TIME*,14X,1H*)
3014 FORMAT(39X,1H*,14X,*YAWING VELOCITY VS TIME *,14X,1H*)
3027 FORMAT(39X,54(1H*))
STOP
END

```



```

FUNCTION F1(U,V,W,X,Y,Z)
COMMON/VAM1/C1,C2,C3,C4
F1=C1*U+C2*V+C3*W+C4
RETURN
END

```

```

C
FUNCTION F2(U,V,W,X,Y,Z)
COMMON/VAM2/D1,D2,D3,D4
F2=D1*U+D2*V+D3*W+D4
RETURN
END

```

```

C
FUNCTION F3(U,V,W,X,Y,Z)
COMMON/VAM3/E1,E2,E3,E4,E5,E6
F3=E1*U+E2*V+E3*W+E4+E5*Y+E6*Z
RETURN
END

```

```

C
SUBROUTINE GRAF(YD,YD,M,N,NPLOT,IHOR,JVER)
DIMENSION XD(M),YD(M),PLOT(121,55)
DATA BLANK,DOT,STAR,AI,DASH,OVER/1H,1H.,1H*,1H,1H,1H+/
IF(IHOR.GT.12.OR.JVER.GT.9)PRINT 1
IF(IHOR.GT.12)IHOR=12
IF(JVER.GT.9)JVER=9
NXPLOT=0
IF(NPLOT.EQ.1) GO TO 20
MINA=121
LINA=55
GO TO 30
20 MINA=IHOR*10+1
LINA=JVER*6+1
30 MINA=MINA-1
NEENA=MINA-10
DO 40 IX=2,NINA
DO 40 JY=1,LINA
PLOT(IX,JY)=BLANK
IF(JY.EQ.7.OR.JY.EQ.13.OR.JY.EQ.19.OR.JY.EQ.25.OR.JY.EQ.31.OR.JY.
EQ.37.OR.JY.EQ.43.OR.JY.EQ.49.OR.JY.EQ.55)PLOT(IX,JY)=DASH
IF(JY.EQ.1.OR.JY.EQ.LINA)PLOT(IX,JY)=STAR
40 CONTINUE
DO 50 JY=1,LINA
PLOT(1,JY)=STAR
IF(JY.EQ.1.OR.JY.EQ.LINA) GO TO 50
DO 60 IX=11,NEENA,10
60 PLOT(IX,JY)=AI
50 PLOT(MINA,JY)=STAR
70 IF(NXPLOT.EQ.1)GO TO 80
XA=XD(1)
XB=XD(1)
YA=YD(1)
YB=YD(1)
DO 90 J=1,N
IF(XD(J).GT.XA)XA=XD(J)
IF(XD(J).LT.XB)XB=XD(J)
IF(YD(J).GT.YA)YA=YD(J)

```

```

90 IF(YD(J),LT,YB) YB=YD(J)
80 SCALEX=FLOAT(MINA-3)/(XA-XB)
   SCALEY=FLOAT(LINA-3)/(YA-YB)
   DO 100 J=1,N
   IX=(XD(J)-XB)*SCALEX+2.5
   JY=FLOAT((LINA-1)-(YD(J)-YB)*SCALEY+0.5
   IF(PLOT(IX,JY).EQ.DOT)PLOT(IX,JY)=OVER
   IF(PLOT(IX,JY).EQ.OVER) GO TO 100
   PLOT(IX,JY)=DOT
100 CONTINUE
   SCALEX=9.8/SCALEX
   SCALEY=5.88/SCALEY
   PRINT 120
   KINA=LINA/2
   DO 131 JY=1,LINA
   IF(JY.EQ.KINA)PRINT 150,XB,XA,YB,YA,SCALEX,SCALEY
   IF(JY.EQ.KINA.OR.JY.EQ.KINA+1.OR.JY.EQ.KINA+2.OR.JY.EQ.KINA+3)
1  GO TO 131
130 PRINT 140,(PLOT(IX,JY),IX=1,MINA)
131 CONTINUE
160 IF(NXPLCT.EQ.1) GO TO 2
10  FORMAT(/10X,*YOUR SLIP IS SHOWING,SIZE EXCEEDS ALLOWABLE LIMITS*)
140 FORMAT(10X121A1)
120 FORMAT(1H1)
150 FORMAT(41X,*X AXIS MIN=*,1PE12.4,10X,*XMAX=*,1PE12.4/41X,*Y AXIS
1MIN=*,1PE13.4,10X,*YMAX=*,1PE13.4/41X,*HORIZONTAL SCALE - 10 COLUM
2NS=*,1PE12.2,* UNITS*,/41X,*VERTICAL SCALE - 6 LINES
31PE10.2,* UNITS*)
   RETURN
   END.

```

C

```

SUBROUTINE GRAPHM( X, Y, NS, NP)
*****
C **** EXPLANATION OF FORMAL PARAMETERS ***
C **** X - HORIZONTAL COORDINATE
C **** Y - VERTICAL COORDINATE
C **** NS - TOTAL NO. OF SETS, NS .LE. 20
C **** NP(K) - NO. OF POINTS IN SET K, K .LE. NS
C **** DIMENSIONS***
C **** X(FIRST,SECOND), Y(FIRST,SECOND), XD(SECOND), YD(SECOND),
C **** XMIN(FIRST), XMAX(FIRST), YMIN(FIRST), YMAX(FIRST), NP(FIRST)
C **** FIRST - MAXIMUM NO. OF SETS.
C **** SECOND - MAXIMUM NO. OF POINTS IN ANY SET.
C **** EXPLANATION OF AUXILIARY PARAMETERS ***
C **** XD,YD - DUMMY ONE DIMENSIONAL VARIABLES.
C **** IX,JY - HORIZONTAL AND VERTICAL DISTANCES.
C **** MINA - HORIZONTAL SIZE IN NO. OF COLUMNS.
C **** LINA - VERTICAL SIZE IN NO. OF ROWS.
C **** CODES ***
C **** ISCALE - 0 SAME VERTICAL SCALE FOR ALL SETS.
C **** ISCALE - 1 DIFFERENT VERTICAL SCALES.
C **** NPLCT - 0 GRAPH OF FULL NORMAL SIZE
C **** NPLCT -1 GRAPH OF ANY SIZE. (IHSIZE,JVSIZE)
C **** NPLCT -2 GRAPHS OF BOTH SIZES
C **** NOPRNT - DETAILED LISTING OF MIN & MAX VALUES

```

```

C **** NOPRNT - 1 SUPPRESS DETAIL LISTING.
C **** IHSIZE - HORIZONTAL SIZE IN NO. OF INCHES (INTEGER).LE.13
C **** JVSZIE - VERTICAL SIZE IN NO. OF INCHES (INTEGER).LE.10
C **** (IF NPLOT .EQ. 1 THE LAST TWO WILL NOT BE USED)
C **** THE VALUES OF THESE CODES SHOULD BE TRANSMITTED FROM THE CALLING
C **** PROGRAM TO THE SUBROUTINE THROUGH -
C **** COMMON /GPHM/ ISCALE,NPLOT,NOPRNT,IHSIZE,JVSZIE
C*****
DIMENSION XD(120),YD(120),X(5,120),Y(5,120),NP(20),
2XMAX(20),XMIN(20),YMAX(20),YMIN(20),PT(20),OVER(10),PLOT(131,61)
DATA BLANK,DOT,STAR,AI,DASH/1H,1H.,1H*,1H/,
2PT/1H.,1H*,1H+,1HX,1HY,2HF,1HG,1HH,1HJ,1HK,1HL,1HM,1HN,1HP,1HQ,
31HR,1HS,1HT,1HU,1HV/,
4OVER/1H1,1H2,1H3,1H4,1H5,1H6,1H7,1H8,1H9,1H/
COMMON/GPHM/ISCALE,NPLOT,NOPRNT,IHSIZE,JVSZIE
IF(IHSIZE.GT.13) IHSIZE=13
IF(JVSZIE.GT.10) JVSZIE=10
NXPLOT=0
IF (ISCALE .EQ. 1 ) NOPRNT = 1
IF(NPLOT .EQ. 1) GO TO 122
MINA = 131
LINA = 61
GO TO 222
122 MINA = IHSIZE * 1 + 1
LINA = JVSZIE * 6 + 1
222 IF ( NOPRNT .EQ. 1 ) GO TO 322
IF ( ISCALE .EQ. 0 ) PRINT 981
IF ( ISCALE .EQ. 1 ) GO TO 322
PRINT 982
322 MINA = MINA - 1
NEENA = MINA - 10
C **** GENERATING THE GRID.
DO 11 IX = 2,NINA
DO 11 JY = 1, LINA
PLOT(IX,JY) = BLANK
IF ( JY.EQ.7 .OR. JY .EQ.13 .OR. JY .EQ. 19 .OR. JY .EQ. 25 .OR.
2 JY.EQ. 31 .OR. JY .EQ. 37 .OR. JY .EQ. 43 .OR. JY .EQ.49 .OR. JY
3 .EQ. 55 ) PLOT(IX,JY) = DASH
IF ( JY.EQ.1 .OR. JY .EQ.LINA)PLOT(IX,JY) = STAR
11 CONTINUE
DO 21 JY = 1, LINA
PLOT ( 1,JY) = STAR
IF (JY .EQ.1 .OR. JY .EQ. LINA ) GO TO 21
DO 21 IX = 11,NEENA, 1
211 PLOT(IX,JY) = AI
21 PLOT(MINA,JY) = STAR
C **** IF NPLOT IS 1 ONLY REDUCED SIZE IS TO BE PRINTED.
C **** IF NXPLOT IS 1 BOTH SIZES ARE TO BE PRINTED.
522 IF ( NXPLOT.EQ. 1 ) GO TO 622
C **** FINDING MINIMUM AND MAXIMUM FOR EACH SET.
DO 61 K = 1,NS
NPK = NP(K)
DO 611 J = 1,NPK
611 XD(J) = X(K,J)
YD(J) = Y(K,J)

```



```

      CALL MAXMIN ( XD, NPK, XMAX(K), XMIN(K) )
      CALL MAXMIN ( YD, NPK, YMAX(K), YMIN(K) )
61    C O N T I N U E
C **** FINDING OVERALL MAX AND MIN FOR ALL VALUES OF X AND Y .
      XA = XMAX(1)
      XB = XMIN(1)
      YA = YMAX(1)
      YB = YMIN(1)
      DO 71 K = 1,NS
      IF (XA.LT.XMAX(K)) XA = XMAX(K)
      IF (YA.LT.YMAX(K)) YA = YMAX(K)
      IF (XB.GT. XMIN(K)) XB = XMIN(K)
71    IF (YB.GT. YMIN(K)) YB = YMIN(K)
622    SCALEX = FLOAT(MINA-3) / (XA-XB)
      SCALEY = FLOAT(LINA-3) / (YA-YB)
      DO 81 K = 1,NS
      NPK = NP(K)
      DO 811 J = 1,NPK
      XD(J)=X(K,J)
811    YD(J)=Y(K,J)
      IF (ISCALE.EQ.0) GO TO 32
      YA=YMAX(K)
      YB=YMIN(K)
      SCALEY=FLOAT(LINA-3)/(YA-YB)
C **** FINDING THE POINT ON THE GRAPH.
32    DO 821 J=1,NPK
      IX=(XD(J)-XB)*SCALEX+2.5
      JY=FLOAT(LINA-1)-(YD(J)-YB)*SCALEY+2.5-2.
      IF(K.EQ.1) GO TO 42
      DO 8211 L=2,9
      IF(PLOT(IX,JY).EQ.OVER(L)) GO TO 52
8211 CONTINUE
      GO TO 62
52    PLOT(IX,JY)=OVER(L+1)
      GO TO 821
62    KM=K-1
      DO 8221 L=1,KM
8221 IF(PLOT(IX,JY).EQ.PT(L)) GO TO 22
      GO TO 42
22    PLOT(IX,JY)=OVER(2)
      GO TO 821
42    PLOT(IX,JY)=PT(K)
821 CONTINUE
      IF(NOPRNT.EQ.1) GO TO 81
      IF(ISCALE.EQ.0) GO TO 72
      SCALEY=5.88/SCALEY
      PRINT 984,K,XMIN(K),XMAX(K),YMIN(K),YMAX(K),SCALEY,PT(K)
      GO TO 81
72    PRINT 983,K,XMIN(K),XMAX(K),YMIN(K),YMAX(K),PT(K)
81    CONTINUE
      SCALEY=5.88/SCALEY
      SCALEX=9.8/SCALEX
      IF(NOPRNT.EQ.1) GO TO 82
      IF(ISCALE.EQ.0) PRINT 985,SCALEX,SCALEY
      IF(ISCALE.EQ.1) PRINT 986,SCALEX

```

105

```

82   IF(NOPRNT.EQ.1) PRINT 988
C **** PRINT THE GRAPH
      KINA=LINA/2
      DO 102 JY=1,LINA
      IF(JY.EQ.KINA) GO TO 103
      GO TO 104
103  IF(NOPRNT.EQ.1)PRINT989,XB,XA,YB,YA,SCALEX,SCALEY
104  IF(JY.EQ.KINA.OR.JY.EQ.KINA+1.OR.JY.EQ.KINA+2.OR.JY.EQ.KINA+3)
      1 GO TO 102
101  PRINT 987,(PLOT(IX,JY),IX=1,MINA)
102  CONTINUE
C **** TEST IF GRAPH OF REDUCED SIZE IS TO BE PRINTED.
      IF(NPLOT.EQ.2) NXPLCT=NXPLCT+1
      IF(NOPRNT.EQ.1) GO TO 92
      IF(NPLOT.EQ.1.OR.NXPLCT.EQ.2) PRINT 388
92   IF(NXPLCT.EQ.1) GO TO 122
981  FORMAT(2H1,120(1H*)/2H *118X1H*/2H *9X*SET*11X*X (MIN)*13X*X (MA
2*13X*Y (MIN)*13X*Y (MAX)*12X*LETTER*10X1H* )
982  FORMAT(1H1,120(1H*)/1X1H*118X1H*/2H *6X*SET*10X*X (MIN)*12X*X (M
2)*12X*Y (MIN)*12X*Y (MAX)*12X*Y SCALE*6X*LETTER*4X1H* )
983  FORMAT(2H *118X1H*/2H *9X12,8X4(1PE12.4,8X),6XA1,1X1H*)
984  FORMAT(2H *118X1H*/2H *6X12,7X4(1PE12.4,7X)1PE12.2,8XA1,6X1H*)
985  FORMAT(2H *118X1H*/2H *27X*HORIZONTAL SCALE - 10 COLUMNS = *,
2 1PE12.2,* UNITS*38X1H*/2H *118X1H*/2H *27X*VERTICAL SCALE -
3 6 LINES = *1PE12.2,* UNITS*38X1H*/2H *118X1H*/1X120(1H*)/1H1
986  FORMAT(2H *118X1H*/2H *27X*HORIZONTAL SCALE - 10 COLUMNS = *,
2 1PE12.2,* UNITS*38X1H*/2H *118X1H*/2H *10X*VERTICAL SCALES ARE
31FFERENT CORRESPONDING TO MIN AND MAX VALUES OF Y CO-ORDINATE IN
4ACH SET*14X1H*/2H *47X*(6 LINES = YY UNITS)*51X1H*/2H *118X1H*/
5 1X120(1H*)/1H1 )
987  FORMAT(10X121A1)
988  FORMAT(////////// )
988  FORMAT(1H1)
989  FORMAT(40X*X AXIS MIN = *1PE12.4,10X*MAX = *1PE12.4/40X*Y AXIS M
2 *=1PE13.4,10X*MAX *=1PE13.4/40X*HORIZONTAL SCALE - 10 COLUMNS =
31PE12.2,* UNITS*/40X*VERTICAL SCALE - 6 LINES *=1PE12.2,
4* UNITS*)
      RETURN
      END
C
SUBROUTINE MAXMIN (XD,N,XMAX,XMIN )
DIMENSION XD(120)
XMAX=XD(1)
XMIN=XMAX
DO 51 J=1,N
IF (XD(J).GT. XMAX ) XMAX= XD(J)
IF (XD(J) .LT. XMIN ) XMIN= XD(J)
51 CONTINUE
RETURN
END

```

APPENDIX 'F'

TYPICAL INPUT/OUTPUT

CESSNA 182

MASS AND GEOMETRICAL CHARACTERISTICS

WEIGHT (LBS)	MOMENT OF INERTIA (SLUGS SQ.FT)	SPAN (FT)	WING AREA (SQ.FT)
1650	IXX 948.0 IZZ 1967.0	36.08	174.39

FLIGHT CONDITIONS

VELOCITY (KNOT)	DENSITY (SLUGS/CU.FT)	LIFT COEFFICIENT	ANGLE OF ATTACK(DEG)	FLIGHT PATH ANGLE(DEG)
100	0.002078	1.445	10.2	-6.8

STABILITY DERIVATIVES

ROLL RATE	YAW RATE	CONTROL
CYP=-0.2154	CYR= 0.2010	CYC= 0.0000
CLP=-0.4940	CLR= 0.2039	CLC= 0.0000
CNP=-0.096	CNR=-0.1151	CNC= 0.0000

INITIAL CONDITIONS

ANGLE(DEG)	RATES(DEG/SEC)
ROLL 0.0	ROLL 0.0
YAW 0.0	YAW 0.0
SIDESLIP 10.0	

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
0.0500	-0.0997	0.0484	9.9117	-3.7004	1.9172
0.1000	-0.3465	0.1896	9.7306	-5.9699	3.7079
0.1500	-0.6800	0.4169	9.4613	-7.2278	5.3589
0.2000	-1.0157	0.7230	9.1096	-7.7694	6.8595
0.2500	-1.4436	1.1002	8.6828	-7.8037	8.2017
0.3000	-1.8320	1.5404	8.1888	-7.4799	9.3797
0.3500	-2.1923	2.0354	7.6360	-6.9053	10.3898
0.4000	-2.5196	2.5766	7.0333	-6.1583	11.2305
0.4500	-2.8064	3.1556	6.3897	-5.2970	11.9024
0.5000	-3.0482	3.7643	5.7142	-4.3648	12.4376
0.5500	-3.2443	4.3936	5.0156	-3.3951	12.7502
0.6000	-3.3975	5.0364	4.3027	-2.4138	12.9356
0.6500	-3.5083	5.6847	3.5838	-1.4414	12.9707
0.7000	-3.5821	6.3311	2.8670	-0.4941	12.8637
0.7500	-3.6339	6.9689	2.1597	0.4149	12.5235
0.8000	-3.6644	7.5915	1.4591	1.2743	12.2507
0.8500	-3.6814	8.1931	0.8014	2.0771	11.7857
0.9000	-3.6848	8.7683	0.1627	2.8149	11.2100
0.9500	-3.6741	9.3126	-0.4420	3.4831	10.5456
1.0000	-3.6577	9.8216	-1.0080	4.0776	9.8046
1.0500	-3.6265	10.2920	-1.5316	4.5958	8.9992
1.1000	-3.5814	10.7207	-2.0095	5.0361	8.1418
1.1500	-3.5232	11.1055	-2.4391	5.3960	7.2444
1.2000	-3.4509	11.4447	-2.8186	5.6818	6.3189
1.2500	-3.3650	11.7371	-3.1468	5.8888	5.3769
1.3000	-3.2650	11.9823	-3.4230	6.0210	4.4294
1.3500	-3.1514	12.1801	-3.6473	6.0813	3.4869
1.4000	-3.0245	12.3312	-3.8202	6.0730	2.5590
1.4500	-2.8842	12.4364	-3.9426	6.0001	1.6551

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
1.5000	-1.1473	12.4972	-4.163	5.8669	0.7834
1.5500	0.0000	12.5154	-4.0431	5.6784	-0.0486
1.6000	0.0000	12.4932	-4.0254	5.4396	-0.8342
1.6500	0.0000	12.4329	-3.9050	5.1559	-1.5676
1.7000	0.0000	12.3373	-3.8677	4.8334	-2.2439
1.7500	0.0000	12.2295	-3.7339	4.4765	-2.8591
1.8000	0.0000	12.0525	-3.5681	4.0921	-3.4131
1.8500	0.0000	11.8096	-3.3737	3.6855	-3.8945
1.9000	0.0000	11.6642	-3.1546	3.2623	-4.3111
1.9500	0.0000	11.4396	-2.9144	2.8281	-4.6590
2.0000	0.0000	11.1994	-2.6569	2.3881	-4.9386
2.0500	0.0000	10.9469	-2.3859	1.9472	-5.1505
2.1000	0.0000	10.6855	-2.1151	1.5104	-5.2966
2.1500	0.0000	10.4183	-1.8179	1.0820	-5.3789
2.2000	0.0000	10.1486	-1.5278	0.6662	-5.4070
2.2500	0.0000	9.8793	-1.2382	0.2667	-5.3633
2.3000	0.0000	9.6132	-0.9521	-0.1131	-5.2725
2.3500	0.0000	9.3529	-0.6722	-0.4703	-5.1314
2.4000	0.0000	9.0008	-0.4013	-0.8023	-4.9446
2.4500	0.0000	8.8591	-0.1419	-1.1171	-4.7166
2.5000	0.0000	8.5297	0.1040	-1.3828	-4.4522
2.5500	0.0000	8.4144	0.3346	-1.5282	-4.1563
2.6000	0.0000	8.2146	0.5481	-1.8423	-3.8337
2.6500	0.0000	8.0314	0.7434	-2.0247	-3.4896
2.7000	0.0000	7.8659	0.9192	-2.1751	-3.1287
2.7500	0.0000	7.7137	1.0750	-2.2938	-2.7560
2.8000	0.0000	7.5904	1.2100	-2.3813	-2.3760
2.8500	0.0000	7.4812	1.3240	-2.4384	-1.9933
2.9000	0.0000	7.3910	1.4171	-2.4662	-1.6121
2.9500	0.0000	7.3198	1.4894	-2.4661	-1.2364

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
3.0000	1.1236	7.2672	1.5413	-2.4397	-0.8700
3.0500	1.0028	7.2326	1.5733	-2.3888	-0.5151
3.1000	0.8851	7.2154	1.5864	-2.3152	-0.1780
3.1500	0.7716	7.2145	1.5813	-2.2211	0.1417
3.2000	0.6633	7.2292	1.5593	-2.1085	0.4416
3.2500	0.5610	7.2582	1.5214	-1.9799	0.7166
3.3000	0.4655	7.3004	1.4690	-1.8374	0.9581
3.3500	0.3775	7.3546	1.4035	-1.6833	1.1939
3.4000	0.2915	7.4194	1.3264	-1.5201	1.3928
3.4500	0.2256	7.4934	1.2390	-1.3499	1.5544
3.5000	0.1624	7.5753	1.1430	-1.1749	1.7083
3.5500	0.1061	7.6638	1.0398	-0.9974	1.8245
3.6000	0.0537	7.7573	0.9309	-0.8193	1.9134
3.6500	0.0062	7.8547	0.8179	-0.6426	1.9756
3.7000	-0.0016	7.9545	0.7022	-0.4691	2.0119
3.7500	-0.0038	8.0555	0.5852	-0.3005	2.0234
3.8000	-0.0058	8.1564	0.4681	-0.1383	2.0114
3.8500	-0.0074	8.2552	0.3524	0.0161	1.9773
3.9000	-0.0088	8.3538	0.2390	0.1515	1.9227
3.9500	-0.0098	8.4482	0.1292	0.2968	1.8495
4.0000	-0.0104	8.5385	0.0239	0.4213	1.7594
4.0500	-0.0107	8.6259	-0.0761	0.5340	1.5545
4.1000	-0.0107	8.7037	-0.1699	0.6345	1.5363
4.1500	-0.0104	8.7773	-0.2570	0.7226	1.4073
4.2000	-0.0098	8.8443	-0.3367	0.7977	1.2594
4.2500	-0.0089	8.9041	-0.4086	0.8600	1.1245
4.3000	-0.0077	8.9566	-0.4725	0.9095	0.9745
4.3500	-0.0062	9.0015	-0.5280	0.9463	0.8214
4.4000	-0.0046	9.0388	-0.5750	0.9708	0.6670
4.4500	-0.0036	9.0683	-0.6136	0.9834	0.5130

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
4.5000	0.4018	9.0904	-0.5437	1.9347	0.2611
4.5500	0.4018	9.1144	-0.6555	0.9752	0.2126
4.6000	0.4018	9.1114	-0.5794	2.9558	0.0692
4.6500	0.4018	9.1114	-0.5555	0.9271	-0.0581
4.7000	0.4018	9.1045	-0.5543	0.3971	-0.1989
4.7500	0.4018	9.0918	-0.5752	0.5453	-0.3195
4.8000	0.4018	9.0729	-0.5516	0.7942	-0.4321
4.8500	0.4018	9.0467	-0.5411	0.7573	-0.5343
4.9000	0.4018	9.0196	-0.5152	0.6755	-0.6271
4.9500	0.4018	8.9852	-0.5345	0.6173	-0.7157
5.0000	0.4018	8.9491	-0.5497	0.5416	-0.7792
5.0500	0.4018	8.9085	-0.5112	0.4712	-0.8305
5.1000	0.4018	8.8653	-0.4598	0.3996	-0.8857
5.1500	0.4018	8.8231	-0.4251	0.3376	-0.9238
5.2000	0.4018	8.7731	-0.4306	0.2562	-0.9500
5.2500	0.4018	8.7252	-0.4339	0.1859	-0.9556
5.3000	0.4018	8.6767	-0.4287	0.1176	-0.9715
5.3500	0.4018	8.6282	-0.4239	0.0513	-0.9575
5.4000	0.4018	8.5801	-0.41925	-0.0110	-0.9548
5.4500	0.4018	8.5328	-0.41456	-0.0712	-0.9356
5.5000	0.4018	8.4868	-0.41020	-0.1253	-0.9148
5.5500	0.4018	8.4425	-0.40592	-0.1761	-0.8691
5.6000	0.4018	8.4000	-0.40185	-0.2222	-0.8272
5.6500	0.4018	8.3598	0.0197	-0.2634	-0.7800
5.7000	0.4018	8.3221	0.0552	-0.2995	-0.7283
5.7500	0.4018	8.2871	0.0878	-0.3305	-0.6729
5.8000	0.4018	8.2549	0.1173	-0.3562	-0.6146
5.8500	0.4018	8.2256	0.1435	-0.3768	-0.5541
5.9000	0.4018	8.1995	0.1663	-0.3922	-0.4923
5.9500	0.4018	8.1764	0.1857	-0.4027	-0.4299

CESSNA 182

MASS AND GEOMETRICAL CHARACTERISTICS

WEIGHT (LBS)	2650.0	MOMENT OF INERTIA (SLUGS SQ.FT) IXX	948.0	1967.0	SPAN (FT)	36.08	WING AREA (SQ.FT)	174.38
-----------------	--------	---	-------	--------	--------------	-------	----------------------	--------

FLIGHT CONDITIONS

VELOCITY (MPH)	73.0	DENSITY (SLUGS/CU.FT)	0.002378	LIFT COEFFICIENT	1.115	ANGLE OF ATTACK(DEG)	10.20	FLIGHT PATH ANGLE(DEG)	-6.80
-------------------	------	--------------------------	----------	---------------------	-------	-------------------------	-------	---------------------------	-------

STABILITY DERIVATIVES

SIDESLIP		ROLL RATE		YAW RATE		CONTRCL	
CYB=-0.3191		CYP= 0.0304		CYR= 0.1714		CYC= 0.0000	
CLB=-0.0919		CLP=-0.4633		CLR= 0.2654		CLC= 0.0000	
CNB= 0.0580		CNP=-0.1353		CNR=-0.1254		CNC= 0.0000	

INITIAL CONDITIONS

ANGLES(DEG)		RATES(DEG/SEC)	
ROLL 0.0		ROLL 0.0	
YAW 0.0		YAW 0.0	
SIDESLIP 10.0			

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
0.0000	0.0000	0.0000	10.0000	0.0000	0.0000
0.0500	-0.0941	0.0447	9.9151	-3.5007	1.6589
0.1000	-0.3280	0.1646	9.7473	-5.6642	3.2440
0.1500	-0.6446	0.3644	9.4995	-6.8600	4.7251
0.2000	-1.0325	0.6351	9.1770	-7.3578	6.0808
0.2500	-1.3721	0.9701	8.7861	-7.3551	7.2960
0.3000	-1.7322	1.3622	8.3343	-6.9974	8.3614
0.3500	-2.0678	1.8036	7.8295	-6.3927	9.2715
0.4000	-2.3687	2.2867	7.2802	-5.6216	10.0245
0.4500	-2.6282	2.8035	6.6949	-4.7447	10.6213
0.5000	-2.8422	3.3463	6.0818	-3.8080	11.0651
0.5500	-3.0086	3.9075	5.4493	-2.8467	11.3611
0.6000	-3.1269	4.4800	4.8053	-1.8876	11.5160
0.6500	-3.1977	5.0569	4.1574	-0.9514	11.5378
0.7000	-3.2227	5.6317	3.5126	-0.0543	11.4355
0.7500	-3.2040	6.1986	2.8775	0.7917	11.2190
0.8000	-3.1445	6.7519	2.2581	1.5773	10.8986
0.8500	-3.0474	7.2869	1.6598	2.2957	10.4853
0.9000	-2.9162	7.7991	1.0875	2.9421	9.9900
0.9500	-2.7544	8.2847	0.5453	3.5135	9.4240
1.0000	-2.5661	8.7405	0.0368	4.0081	8.7985
1.0500	-2.3549	9.1637	-0.4351	4.4256	8.1245
1.1000	-2.1248	9.5523	-0.8680	4.7666	7.4125
1.1500	-1.8795	9.9045	-1.2601	5.0327	6.6731
1.2000	-1.6227	10.2193	-1.6103	5.2262	5.9161
1.2500	-1.3580	10.4960	-1.9179	5.3502	5.1508
1.3000	-1.0888	10.7344	-2.1826	5.4083	4.3860
1.3500	-0.8182	10.9347	-2.4049	5.4047	3.6299
1.4000	-0.5493	11.0977	-2.5855	5.3437	2.8698
1.4500	-0.2847	11.2241	-2.7254	5.2302	2.1725

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
1.5000	-0.0271	11.3154	-2.8262	5.0692	1.4840
1.5500	0.2215	11.3731	-2.8897	4.8659	0.8296
1.6000	0.4589	11.3990	-2.9178	4.6256	0.2136
1.6500	0.6835	11.3951	-2.9130	4.3534	-0.3600
1.7000	0.8938	11.5637	-2.8776	4.0546	-0.8883
1.7500	1.0866	11.3071	-2.8143	3.7343	-1.3691
1.8000	1.2670	11.2277	-2.7258	3.3976	-1.8005
1.8500	1.4282	11.1279	-2.6148	3.0492	-2.1816
1.9000	1.5718	11.0103	-2.4843	2.6937	-2.5121
1.9500	1.6975	10.8775	-2.3370	2.3354	-2.7921
2.0000	1.8053	1.7320	-2.1757	1.9783	-3.0223
2.0500	1.8954	1.5761	-2.0032	1.6262	-3.2038
2.1000	1.9681	10.4124	-1.8221	1.2824	-3.3385
2.1500	2.0238	10.2430	-1.6351	0.9501	-3.4281
2.2000	2.0633	10.0703	-1.4444	0.6319	-3.4750
2.2500	2.0873	9.8962	-1.2526	0.3302	-3.4820
2.3000	2.0966	9.7227	-1.0615	0.0469	-3.4517
2.3500	2.0923	9.5516	-0.8734	-0.2161	-3.3874
2.4000	2.0754	9.3845	-0.6898	-0.4577	-3.2921
2.4500	2.0469	9.2228	-0.5126	-0.6767	-3.1691
2.5000	2.0081	9.0680	-0.3431	-0.8725	-3.0218
2.5500	1.9601	8.9210	-0.1825	-1.0448	-2.8535
2.6000	1.9040	8.7829	-0.0319	-1.1933	-2.6676
2.6500	1.8411	8.6545	0.1078	-1.3183	-2.4673
2.7000	1.7726	8.5364	0.2360	-1.4201	-2.2558
2.7500	1.6995	8.4290	0.3520	-1.4993	-2.0363
2.8000	1.6230	8.3328	0.4556	-1.5568	-1.8115
2.8500	1.5442	8.2479	0.5465	-1.5935	-1.5844
2.9000	1.4640	8.1744	0.6247	-1.6106	-1.3575
2.9500	1.3834	8.1121	0.6903	-1.6092	-1.1332

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
3.0000	1.3033	8.0610	0.7436	-1.5909	-0.9138
3.0500	1.2246	8.0206	0.7848	-1.5569	-0.7011
3.1000	1.1479	7.9907	0.8144	-1.5089	-0.4970
3.1500	1.0739	7.9708	0.8330	-1.4483	-0.3031
3.2000	1.0032	7.9502	0.8411	-1.3767	-0.1206
3.2500	0.9364	7.9385	0.8394	-1.2957	0.0493
3.3000	0.8738	7.9649	0.8286	-1.2069	0.2057
3.3500	0.8158	7.9788	0.8096	-1.1117	0.3480
3.4000	0.7627	7.9995	0.7832	-1.0117	0.4756
3.4500	0.7147	8.0261	0.7501	-0.9082	0.5883
3.5000	0.6719	8.0580	0.7112	-0.8027	0.6860
3.5500	0.6345	8.0945	0.6674	-0.6964	0.7587
3.6000	0.6023	8.1347	0.6194	-0.5904	0.8366
3.6500	0.5754	8.1779	0.5682	-0.4860	0.8901
3.7000	0.5536	8.2234	0.5144	-0.3841	0.9297
3.7500	0.5369	8.2706	0.4589	-0.2856	0.9567
3.8000	0.5250	8.3188	0.4023	-0.1912	0.9696
3.8500	0.5177	8.3674	0.3453	-0.1018	0.9714
3.9000	0.5147	8.4158	0.2887	-0.0179	0.9621
3.9500	0.5158	8.4635	0.2329	0.0599	0.9428
4.0000	0.5206	8.5099	0.1785	0.1314	0.9143
4.0500	0.5288	8.5547	0.1259	0.1963	0.8776
4.1000	0.5401	8.5976	0.0757	0.2542	0.8337
4.1500	0.5542	8.6380	0.0281	0.3051	0.7837
4.2000	0.5705	8.6758	-0.0165	0.3490	0.7284
4.2500	0.5889	8.7108	-0.0578	0.3859	0.6688
4.3000	0.6090	8.7427	-0.0958	0.4159	0.6050
4.3500	0.6304	8.7713	-0.1301	0.4393	0.5408
4.4000	0.6528	8.7967	-0.1607	0.4562	0.4741
4.4500	0.6759	8.8187	-0.1876	0.4669	0.4068

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
4.5000	0.6994	8.8374	-0.2107	0.4718	0.3394
4.5500	0.7230	8.8527	-0.2301	0.4713	0.2729
4.6000	0.7465	8.8647	-0.2458	0.4657	0.2079
4.6500	0.7695	8.8735	-0.2579	0.4555	0.1448
4.7000	0.7919	8.8792	-0.2666	0.4411	0.0844
4.7500	0.8156	8.8820	-0.2720	0.4231	0.0269
4.8000	0.8342	8.8820	-0.2743	0.4017	-0.0271
4.8500	0.8537	8.8794	-0.2737	0.3776	-0.0774
4.9000	0.8719	8.8743	-0.2704	0.3512	-0.1237
4.9500	0.8888	8.8671	-0.2647	0.3229	-0.1658
5.0000	0.9042	8.8578	-0.2568	0.2932	-0.2035
5.0500	0.9181	8.8468	-0.2470	0.2625	-0.2368
5.1000	0.9314	8.8342	-0.2354	0.2312	-0.2657
5.1500	0.9412	8.8203	-0.2223	0.1996	-0.2901
5.2000	0.9504	8.8053	-0.2081	0.1682	-0.3161
5.2500	0.9580	8.7894	-0.1928	0.1372	-0.3259
5.3000	0.9641	8.7728	-0.1768	0.1070	-0.3375
5.3500	0.9687	8.7557	-0.1603	0.0778	-0.3451
5.4000	0.9719	8.7383	-0.1435	0.0498	-0.3491
5.4500	0.9738	8.7208	-0.1266	0.0234	-0.3495
5.5000	0.9743	8.7034	-0.1098	-0.0015	-0.3466
5.5500	0.9736	8.6862	-0.0932	-0.0245	-0.3408
5.6000	0.9719	8.6694	-0.0771	-0.0457	-0.3323
5.6500	0.9691	8.6530	-0.0615	-0.0649	-0.3213
5.7000	0.9654	8.6373	-0.0466	-0.0820	-0.3082
5.7500	0.9609	8.6222	-0.0325	-0.0971	-0.2933
5.8000	0.9557	8.6080	-0.0193	-0.1100	-0.2768
5.8500	0.9500	8.5946	-0.0071	-0.1209	-0.2591
5.9000	0.9437	8.5821	0.0042	-0.1298	-0.2404
5.9500	0.9370	8.5705	0.0143	-0.1367	-0.2211

CESSNA 182

MASS AND GEOMETRICAL CHARACTERISTICS

WEIGHT (LBS)	2650.0	MOMENT OF INERTIA (SLUGS SQ.FT)	IXX	948.0	IZZ	1967.0	SPAN (FT)	36.08	WING AREA (SQ.FT)	174.38
-----------------	--------	------------------------------------	-----	-------	-----	--------	--------------	-------	----------------------	--------

FLIGHT CONDITIONS

VELOCITY (MPH)	150.0	DENSITY (SLUGS/CU.FT)	0.002049	LIFT COEFFICIENT	0.306	ANGLE OF ATTACK (DEG)	0.36	FLIGHT PATH ANGLE (DEG)	0.00
-------------------	-------	--------------------------	----------	---------------------	-------	--------------------------	------	----------------------------	------

STABILITY DERIVATIVES

SIDESLIP CYB=-0.3030 CLB=-0.0923 CNB= 0.0587	ROLL RATE CYP=-0.0752 CLP=-0.4840 CNP=-0.0278	YAW RATE CYR= 0.2140 CLR= 0.0798 CNR=-0.0937	CONTROL CYC= 0.0000 CLC= 0.0000 CNC= 0.0000
---	--	---	--

INITIAL CONDITIONS

ANGLES (DEG)	RATES (DEG/SEC)
ROLL 0.0	ROLL 0.0
YAW 0.0	YAW 0.0
SIDESLIP 10.0	

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
0.0000	0.0000	0.0000	10.0000	0.0000	0.0000
0.0500	-0.3062	0.1164	9.8129	-10.8556	4.6245
0.1000	-0.9919	0.4574	9.4026	-15.8119	8.9540
0.1500	-1.8350	1.0043	8.7865	-17.4839	12.8391
0.2000	-2.7101	1.7322	7.9899	-17.2690	16.1793
0.2500	-3.5439	2.6120	7.0425	-15.9334	18.9386
0.3000	-4.2924	3.6122	5.9770	-13.9157	20.9883
0.3500	-4.9288	4.5997	4.8275	-11.4841	22.4027
0.4000	-5.4570	5.8414	3.6283	-8.8170	23.1560
0.4500	-5.8087	7.0046	2.4128	-6.9441	23.2699
0.5000	-6.0414	8.1583	1.2129	-3.2671	22.7817
0.5500	-6.1368	9.2736	0.0581	-0.5695	21.7418
0.6000	-6.1008	10.3243	-1.0252	1.9787	20.2116
0.6500	-5.9424	11.2877	-2.0141	4.3187	18.2610
0.7000	-5.6732	12.1447	-2.8894	6.4026	15.9553
0.7500	-5.3071	12.8800	-3.6262	8.1927	13.4078
0.8000	-4.8593	13.4824	-4.2436	9.6619	10.6671
0.8500	-4.3465	13.9450	-4.7050	10.7929	7.8254
0.9000	-3.7858	14.2646	-5.0181	11.5784	4.9615
0.9500	-3.1944	14.4420	-5.1844	12.0204	2.1495
1.0000	-2.5893	14.4816	-5.2088	12.1295	-0.5425
1.0500	-1.9867	14.3908	-5.1000	11.9240	-3.0537
1.1000	-1.4018	14.1801	-4.8590	11.4292	-5.3319
1.1500	-0.8481	13.8622	-4.5296	10.6762	-7.3339
1.2000	-0.3379	13.4519	-4.0972	9.7003	-9.0265
1.2500	0.1188	12.9651	-3.5888	8.5407	-10.3864
1.3000	0.5138	12.4190	-3.0221	7.2384	-11.4002
1.3500	0.8410	11.8309	-2.4153	5.8357	-12.0642
1.4000	1.0964	11.2103	-1.7862	4.3745	-12.3837
1.4500	1.2782	10.5981	-1.1524	2.8957	-12.3726

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
1.5000	1.3863	9.9862	-0.5301	1.4379	-12.0522
1.5500	1.4229	9.5976	0.0655	0.0370	-11.4502
1.6000	1.3915	8.8454	0.6210	-1.2752	-10.6000
1.6500	1.2973	8.3411	1.1249	-2.4710	-9.5389
1.7000	1.1467	7.8943	1.5675	-3.5273	-8.3072
1.7500	0.9472	7.5125	1.9417	-4.4263	-6.9472
1.8000	0.7070	7.2010	2.2422	-5.1551	-5.5015
1.8500	0.4347	6.9631	2.4660	-5.7061	-4.0123
1.9000	0.1394	6.7998	2.6125	-6.0764	-2.5202
1.9500	-0.1700	6.7105	2.6827	-6.2683	-1.0633
2.0000	-0.4846	6.6923	2.6798	-6.2883	0.3236
2.0500	-0.7961	6.7412	2.4748	-6.1466	1.6098
2.1000	-1.0968	6.8512	2.2863	-5.8574	2.7691
2.1500	-1.3797	7.0156	2.0512	-5.4371	3.7799
2.2000	-1.6386	7.2264	1.7784	-4.9050	4.6261
2.2500	-1.8686	7.4753	1.4773	-4.2816	5.2968
2.3000	-2.0656	7.7531	1.1573	-3.5886	5.7859
2.3500	-2.2267	8.0508	0.8277	-2.8480	6.0927
2.4000	-2.3500	8.3594	0.4976	-2.0817	6.2210
2.4500	-2.4348	8.6701	0.1752	-1.3107	6.1789
2.5000	-2.4813	8.9746	-0.1315	-0.5550	5.9782
2.5500	-2.4909	9.2655	-0.4159	0.1673	5.6343
2.6000	-2.4654	9.5359	-0.6722	0.8399	5.1648
2.6500	-2.4079	9.7802	-0.8956	1.4486	4.5899
2.7000	-2.3218	9.9935	-1.0826	1.9827	3.9307
2.7500	-2.2111	1.1722	-1.2507	2.4328	3.2094
2.8000	-2.0800	1.3138	-1.3386	2.7930	2.4483
2.8500	-1.9353	1.4158	-1.4062	3.0598	1.6693
2.9000	-1.7756	1.4808	-1.4342	3.2324	0.8932
2.9500	-1.6116	1.5105		3.3124	0.1397

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
3.000	-1.4459	10.4954	-1.4246	3.3037	-0.5737
3.050	-1.2826	10.4500	-1.3799	3.2121	-1.2312
3.100	-1.1259	10.3735	-1.3035	3.0453	-1.8198
3.150	-0.9792	10.2694	-1.1993	2.8123	-2.3288
3.200	-0.8456	10.1420	-1.0719	2.5231	-2.7505
3.250	-0.7277	9.9959	-0.9258	2.1888	-3.0795
3.300	-0.6273	9.8357	-0.7661	1.8206	-3.3136
3.350	-0.5460	9.6661	-0.5975	1.4302	-3.4528
3.400	-0.4845	9.4919	-0.4259	1.0288	-3.4995
3.450	-0.4431	9.3176	-0.2532	0.6273	-3.4585
3.500	-0.4216	9.1474	-0.0865	0.2359	-3.3364
3.550	-0.4192	8.9852	0.0714	-0.1360	-3.1414
3.600	-0.4347	8.8344	0.2169	-0.4803	-2.8932
3.650	-0.4666	8.6978	0.3471	-0.7900	-2.5723
3.700	-0.5130	8.5778	0.4596	-1.0594	-2.2199
3.750	-0.5718	8.4763	0.5529	-1.2842	-1.8377
3.800	-0.6407	8.3943	0.6256	-1.4616	-1.4373
3.850	-0.7172	8.3327	0.6773	-1.5900	-1.0299
3.900	-0.7989	8.2913	0.7080	-1.6694	-0.6264
3.950	-0.8833	8.2698	0.7182	-1.7038	-0.2358
4.000	-0.9682	8.2672	0.7091	-1.6865	0.1299
4.050	-1.0512	8.2823	0.6820	-1.6297	0.4659
4.100	-1.1305	8.3132	0.6388	-1.5347	0.7646
4.150	-1.2042	8.3580	0.5816	-1.4062	1.0208
4.200	-1.2706	8.4145	0.5127	-1.2496	1.2305
4.250	-1.3287	8.4803	0.4347	-1.0708	1.3917
4.300	-1.3775	8.5528	0.3502	-0.8756	1.5032
4.350	-1.4161	8.6298	0.2615	-0.6701	1.5653
4.400	-1.4444	8.7086	0.1715	-0.4601	1.5796
4.450	-1.4622	8.7870	0.0822	-0.2514	1.5487

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
4.5000	-1.4696	8.8628	-0.0039	-0.0490	1.4765
4.5500	-1.4672	8.9340	-0.0850	0.1423	1.3672
4.6000	-1.4557	8.9989	-0.1593	0.3182	1.2262
4.6500	-1.4357	9.0562	-0.2253	0.4754	1.0589
4.7000	-1.4085	9.1045	-0.2818	0.6110	0.8712
4.7500	-1.3750	9.1431	-0.3281	0.7230	0.6694
4.8000	-1.3366	9.1713	-0.3637	0.8100	0.4593
4.8500	-1.2945	9.1889	-0.3882	0.8713	0.2469
4.9000	-1.2499	9.1950	-0.4018	0.9071	0.0377
4.9500	-1.2042	9.1929	-0.4049	0.9181	-0.1631
5.0000	-1.1585	9.1799	-0.3979	0.9056	-0.3511
5.0500	-1.1140	9.1580	-0.3818	0.8714	-0.5222
5.1000	-1.0717	9.1281	-0.3575	0.8177	-0.5732
5.1500	-1.0325	9.0911	-0.3262	0.7471	-0.8015
5.2000	-0.9972	9.0483	-0.2891	0.6626	-0.9053
5.2500	-0.9664	9.0010	-0.2475	0.5670	-0.9835
5.3000	-0.9406	8.9514	-0.2027	0.4637	-1.0357
5.3500	-0.9201	8.8979	-0.1562	0.3557	-1.0623
5.4000	-0.9051	8.8446	-0.1091	0.2460	-1.0642
5.4500	-0.8955	8.7918	-0.0628	0.1375	-1.0430
5.5000	-0.8913	8.7406	-0.0183	0.0329	-1.0006
5.5500	-0.8921	8.6921	0.0233	-0.0653	-0.9395
5.6000	-0.8976	8.6470	0.0612	-0.1552	-0.8624
5.6500	-0.9074	8.6060	0.0946	-0.2349	-0.7722
5.7000	-0.9209	8.5699	0.1230	-0.3030	-0.6722
5.7500	-0.9375	8.5389	0.1460	-0.3587	-0.5654
5.8000	-0.9566	8.5134	0.1633	-0.4012	-0.4551
5.8500	-0.9774	8.4934	0.1749	-0.4303	-0.3442
5.9000	-0.9996	8.4790	0.1808	-0.4461	-0.2355
5.9500	-1.0218	8.4698	0.1812	-0.4491	-0.1317

CESSNA 182

MASS AND GEOMETRICAL CHARACTERISTICS

WEIGHT (LBS)	2650.0	MOMENT OF INERTIA (SLUGS SQ.FT)	1967.0	SPAN (FT)	36.08	WING AREA (SQ.FT)	174.38
		IXX	948.0				
		IZZ					

FLIGHT CONDITIONS

VELOCITY (MPH)	150.0	DENSITY (SLUGS/CU.FT)	0.002049	LIFT COEFFICIENT	0.306	ANGLE OF ATTACK(DEG)	0.36	FLIGHT PATH ANGLE(DEG)	0.00
-------------------	-------	--------------------------	----------	---------------------	-------	-------------------------	------	---------------------------	------

STABILITY DERIVATIVES

SIDESLIP	CYB=-0.3191	ROLL RATE	CYP= 0.0011	YAW RATE	CYR= 0.1697	CONTROL	CYC= 0.0000
	CLB=-0.0798		CLP=-0.4628		CLR= 0.0844		CLC= 0.0000
	CNB= 0.0550		CNP=-0.0337		CNR=-0.0864		CNC= 0.0000

INITIAL CONDITIONS

ANGLES(DEG)		RATES(DEG/SEC)	
ROLL	0.0	ROLL	0.0
YAW	0.0	YAW	0.0
SIDESLIP	10.0		

----- VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL AND YAW RATES WITH TIME -----

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
0.0000	0.0000	0.0000	10.0000	0.0000	0.0000
0.0500	-0.2663	0.1093	9.8151	-9.4811	4.3509
0.1000	-0.8675	0.4310	9.4131	-13.9096	8.4669
0.1500	-1.6114	0.9495	8.8244	-15.4563	12.1985
0.2000	-2.3860	1.6427	8.0567	-15.3147	15.4444
0.2500	-3.1262	2.4847	7.1422	-14.1569	18.1372
0.3000	-3.7916	3.4465	6.1118	-12.3757	20.2352
0.3500	-4.3576	4.4979	4.9941	-10.2146	21.7185
0.4000	-4.8095	5.6081	3.8241	-7.8363	22.5855
0.4500	-5.1396	6.7464	2.6322	-5.3582	22.8511
0.5000	-5.3452	7.8836	1.4486	-2.8715	22.5445
0.5500	-5.4278	8.9920	0.3014	-0.4504	21.7077
0.6000	-5.3924	10.0464	-0.7837	1.8431	20.3926
0.6500	-5.2465	11.0243	-1.7843	3.9574	18.6603
0.7000	-5.0003	11.9066	-2.6812	5.8498	16.5779
0.7500	-4.6658	12.6775	-3.4583	7.4870	14.2172
0.8000	-4.2563	13.3249	-4.1057	8.8440	11.6523
0.8500	-3.7864	13.8405	-4.6141	9.9047	8.9579
0.9000	-3.2709	14.2197	-4.9800	10.6611	6.2071
0.9500	-2.7253	14.4615	-5.2031	11.1133	3.4702
1.0000	-2.1646	14.5681	-5.2860	11.2687	0.8126
1.0500	-1.6032	14.5451	-5.2370	11.1416	-1.7059
1.1000	-1.0548	14.4007	-5.0644	10.7520	-4.0328
1.1500	-0.5319	14.1457	-4.7795	10.1255	-6.1232
1.2000	-0.0457	13.7929	-4.3961	9.2916	-7.9407
1.2500	0.3943	13.3567	-3.9296	8.2832	-9.4578
1.3000	0.7803	12.8525	-3.3965	7.1352	-10.6560
1.3500	1.1061	12.2966	-2.8136	5.8840	-11.5256
1.4000	1.3676	11.7054	-2.1982	4.5662	-12.0653
1.4500	1.5622	11.0954	-1.5672	3.2178	-12.2821

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME

TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
1.5000	1.6894	10.4824	-0.9367	1.8734	-12.1904
1.5500	1.7502	9.8812	-0.3221	0.5654	-11.8111
1.6000	1.7471	9.3056	0.2627	-0.6768	-11.1709
1.6500	1.6840	8.7679	0.8053	-1.8269	-10.3011
1.7000	1.5663	8.2788	1.2951	-2.8627	-9.2368
1.7500	1.4000	7.8469	1.7234	-3.7660	-8.0156
1.8000	1.1921	7.4792	2.0837	-4.5229	-6.6766
1.8500	0.9503	7.1805	2.3711	-5.1239	-5.2595
1.9000	0.6824	6.9539	2.5833	-5.5640	-3.8033
1.9500	0.3966	6.8002	2.7197	-5.8421	-2.3459
2.0000	0.1009	6.7187	2.7814	-5.9615	-0.9226
2.0500	-0.1970	6.7068	2.7717	-5.9288	0.4342
2.1000	-0.4896	6.7605	2.6949	-5.7541	1.6955
2.1500	-0.7702	6.8744	2.5572	-5.4501	2.8366
2.2000	-1.0327	7.0418	2.3654	-5.0323	3.8370
2.2500	-1.2719	7.2555	2.1276	-4.5175	4.6811
2.3000	-1.4832	7.5072	1.8523	-3.9241	5.3579
2.3500	-1.6633	7.7884	1.5485	-3.2714	5.8610
2.4000	-1.8097	8.0903	1.2252	-2.5788	6.1889
2.4500	-1.9208	8.4044	0.8915	-1.8654	6.3442
2.5000	-1.9962	8.7220	0.5561	-1.1499	6.3336
2.5500	-2.0361	9.0351	0.2273	-0.4498	6.1675
2.6000	-2.0417	9.3364	-0.0874	0.2190	5.8593
2.6500	-2.0149	9.6190	-0.3812	0.8420	5.4252
2.7000	-1.9584	9.8771	-0.6482	1.4071	4.8832
2.7500	-1.8754	10.1058	-0.8836	1.9038	4.2532
2.8000	-1.7693	10.3013	-1.0836	2.3245	3.5557
2.8500	-1.6443	10.4606	-1.2454	2.6634	2.8117
2.9000	-1.5044	10.5820	-1.3676	2.9173	2.0422
2.9500	-1.3540	10.6647	-1.4495	3.0852	1.2673

VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
AND YAW RATES WITH TIME


TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
3.0000	-1.1973	10.7090	-1.4915	3.1683	0.5062
3.0500	-1.0385	10.7159	-1.4951	3.1697	-0.2235
3.1000	-0.8816	10.6874	-1.4626	3.0943	-0.9061
3.1500	-0.7303	10.6263	-1.3969	2.9486	-1.5277
3.2000	-0.5878	10.5358	-1.3015	2.7404	-2.0771
3.2500	-0.4571	10.4199	-1.1807	2.4786	-2.5453
3.3000	-0.3407	10.2828	-1.0389	2.1727	-2.9258
3.3500	-0.2434	10.1289	-0.8808	1.8329	-3.2147
3.4000	-0.1578	9.9629	-0.7113	1.4695	-3.4107
3.4500	-0.0937	9.7894	-0.5351	1.0926	-3.5145
3.5000	-0.0486	9.6129	-0.3569	0.7123	-3.5293
3.5500	-0.0224	9.4378	-0.1812	0.3380	-3.4600
3.6000	-0.0145	9.2682	-0.0121	-0.0215	-3.3136
3.6500	-0.0241	9.1076	0.1468	-0.3586	-3.0982
3.7000	-0.0499	8.9594	0.2921	-0.6662	-2.8232
3.7500	-0.0902	8.8261	0.4212	-0.9389	-2.4989
3.8000	-0.1431	8.7101	0.5319	-1.1720	-2.1361
3.8500	-0.2067	8.6130	0.6228	-1.3624	-1.7461
3.9000	-0.2786	8.5358	0.6926	-1.5079	-1.3399
3.9500	-0.3567	8.4791	0.7412	-1.6078	-0.9283
4.0000	-0.4386	8.4429	0.7685	-1.6625	-0.5218
4.0500	-0.5222	8.4266	0.7752	-1.6734	-0.1297
4.1000	-0.6053	8.4295	0.7623	-1.6428	0.2392
4.1500	-0.6858	8.4501	0.7315	-1.5740	0.5775
4.2000	-0.7621	8.4866	0.6844	-1.4710	0.8787
4.2500	-0.8324	8.5372	0.6233	-1.3383	1.1378
4.3000	-0.8955	8.5996	0.5505	-1.1811	1.3511
4.3500	-0.9502	8.6715	0.4685	-1.0046	1.5162
4.4000	-0.9958	8.7504	0.3797	-0.8142	1.6320
4.4500	-1.0315	8.8339	0.2869	-0.6154	1.6986

 VARIATION OF ROLL, YAW AND SIDESLIP ANGLES AND ROLL
 AND YAW RATES WITH TIME


TIME (SEC)	PHI (DEG)	PSI (DEG)	BETA (DEG)	ROLL VELOCITY (DEG/SEC)	YAW VELOCITY (DEG/SEC)
4.5000	-1.0572	8.9195	0.1923	-0.4136	1.7176
4.5500	-1.0729	9.0049	0.0986	-0.2138	1.6912
4.6000	-1.0787	9.0879	0.0078	-0.0208	1.6230
4.6500	-1.0752	9.1666	-0.0779	0.1613	1.5170
4.7000	-1.0629	9.2391	-0.1568	0.3285	1.3782
4.7500	-1.0426	9.3039	-0.2275	0.4778	1.2119
4.8000	-1.0154	9.3599	-0.2887	0.6067	1.0238
4.8500	-0.9823	9.4061	-0.3394	0.7132	0.8198
4.9000	-0.9445	9.4417	-0.3792	0.7962	0.6059
4.9500	-0.9031	9.4666	-0.4076	0.8549	0.3877
5.0000	-0.8594	9.4805	-0.4247	0.8896	0.1710
5.0500	-0.8145	9.4838	-0.4308	0.9008	-0.0393
5.1000	-0.7697	9.4768	-0.4264	0.8896	-0.2383
5.1500	-0.7259	9.4602	-0.4122	0.8577	-0.4218
5.2000	-0.6842	9.4349	-0.3892	0.8072	-0.5865
5.2500	-0.6455	9.4019	-0.3584	0.7403	-0.7294
5.3000	-0.6104	9.3624	-0.3211	0.6597	-0.8485
5.3500	-0.5797	9.3175	-0.2786	0.5682	-0.9421
5.4000	-0.5538	9.2686	-0.2322	0.4686	-1.0097
5.4500	-0.5329	9.2170	-0.1833	0.3640	-1.0512
5.5000	-0.5174	9.1639	-0.1332	0.2570	-1.0670
5.5500	-0.5072	9.1107	-0.0833	0.1505	-1.0585
5.6000	-0.5023	9.0584	-0.0346	0.0470	-1.0273
5.6500	-0.5024	9.0083	0.0116	-0.0512	-0.9755
5.7000	-0.5073	8.9612	0.0544	-0.1420	-0.9057
5.7500	-0.5165	8.9180	0.0930	-0.2237	-0.8205
5.8000	-0.5295	8.8793	0.1268	-0.2947	-0.7231
5.8500	-0.5458	8.8458	0.1551	-0.3541	-0.6165
5.9000	-0.5647	8.8178	0.1776	-0.4012	-0.5038
5.9500	-0.5857	8.7955	0.1941	-0.4354	-0.3883

APPENDIX 'G'
PLOTS OF SOLUTIONS

FLIGHT CONDITION- 73 MPH (APPROACH) - SEA LEVEL
DERIVATIVES - MANUFACTURERS DATA

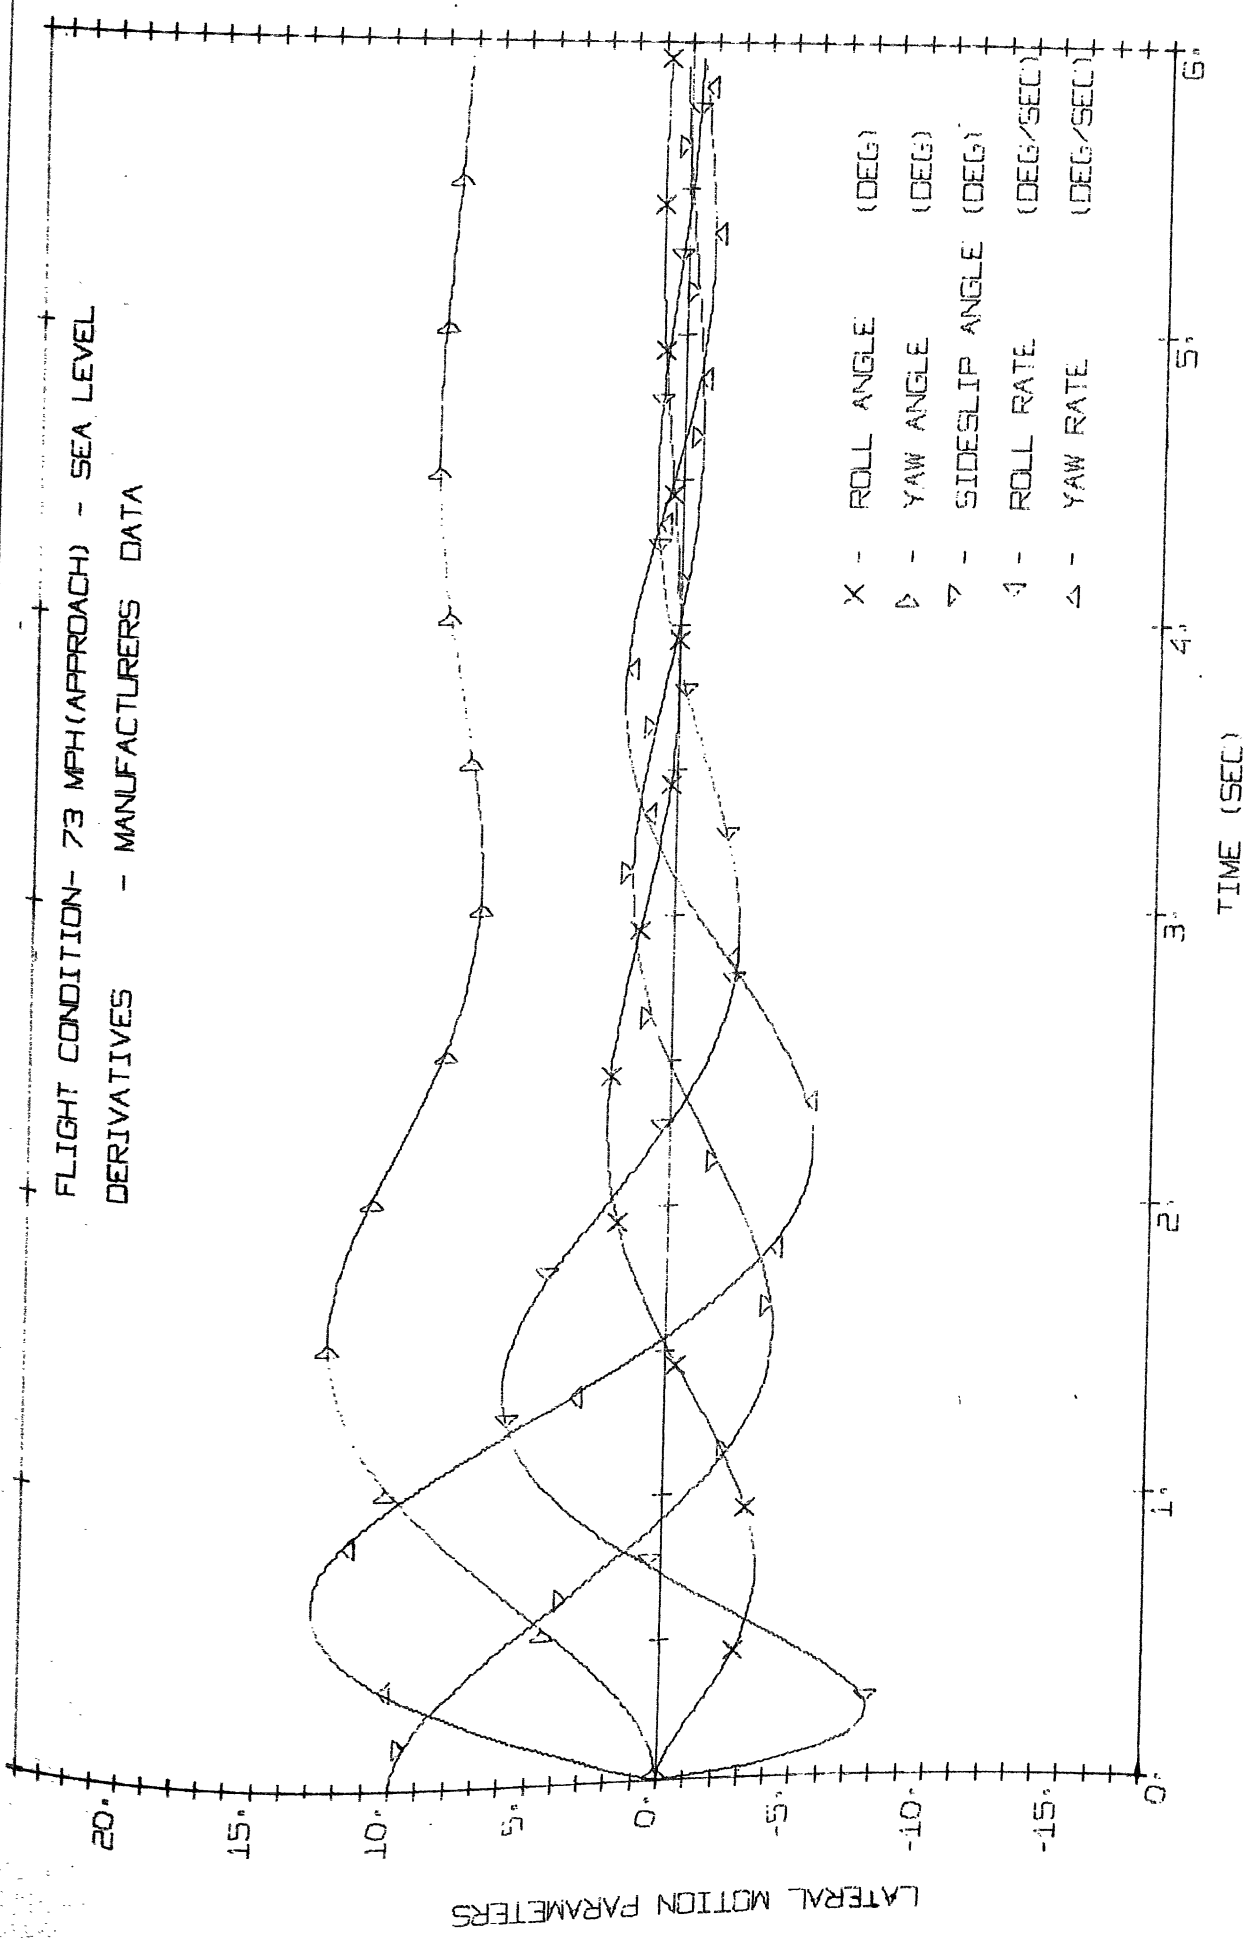

TIME HISTORY OF LATERAL MOTION PARAMETERS
(DISTURBANCE IN SIDESLIP ANGLE = 10 DEG)

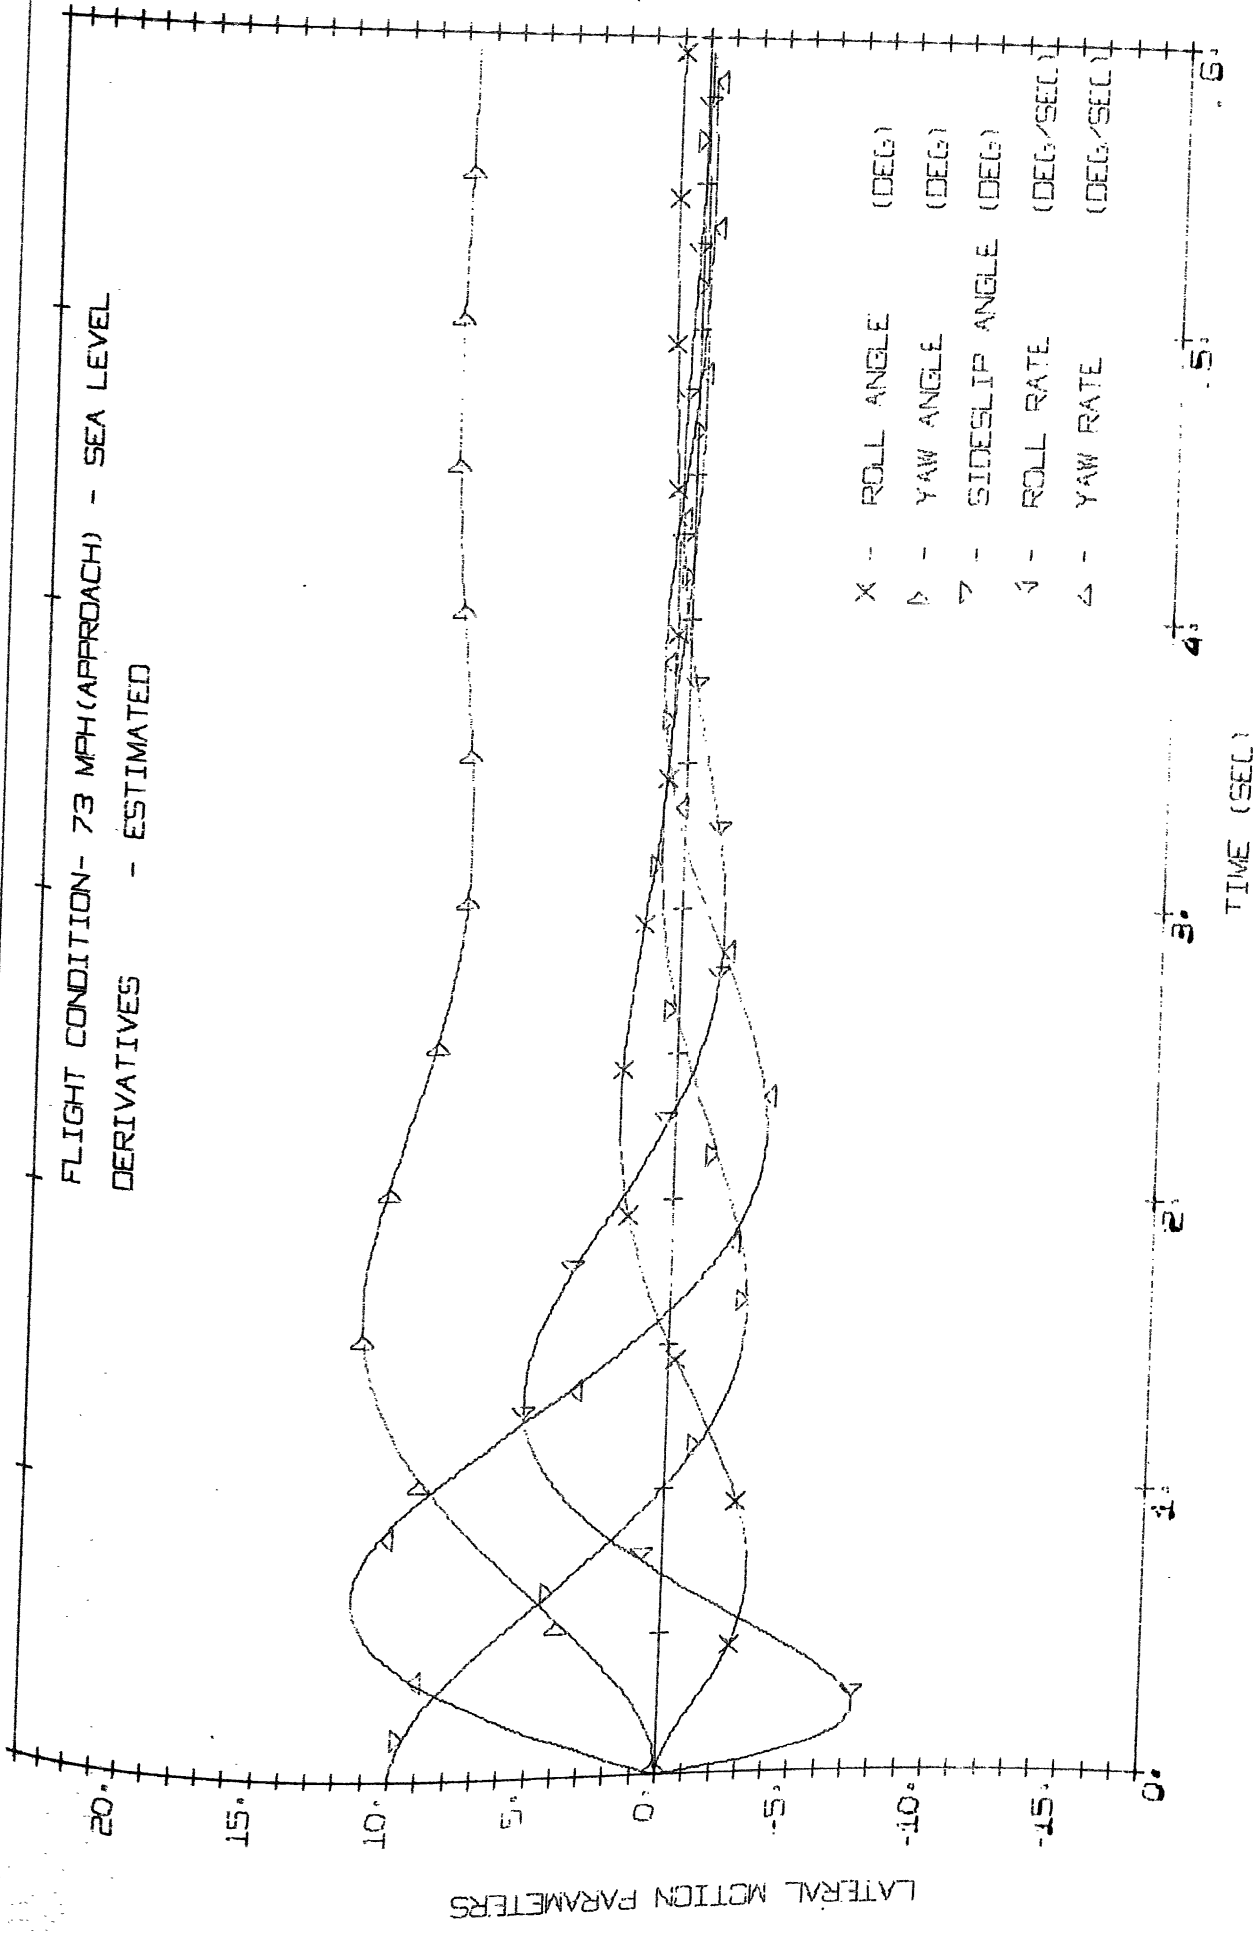

TIME HISTORY OF LATERAL MOTION PARAMETERS
(DISTURBANCE IN SIDESLIP ANGLE = 10 DEG)

FLIGHT CONDITION-150 MPH(CRUISE) - 5000 FT
DERIVATIVES - MANUFACTURERS DATA


LATERAL MOTION PARAMETERS

- X - ROLL ANGLE (DEG)
- P - YAW ANGLE (DEG)
- ▽ - SIDESLIP ANGLE (DEG)
- ∧ - ROLL RATE (DEG/SEC)
- △ - YAW RATE (DEG/SEC)

TIME (SEC.)

TIME HISTORY OF LATERAL MOTION PARAMETERS

(DISTURBANCE IN SIDESLIP ANGLE = 10 DEG)

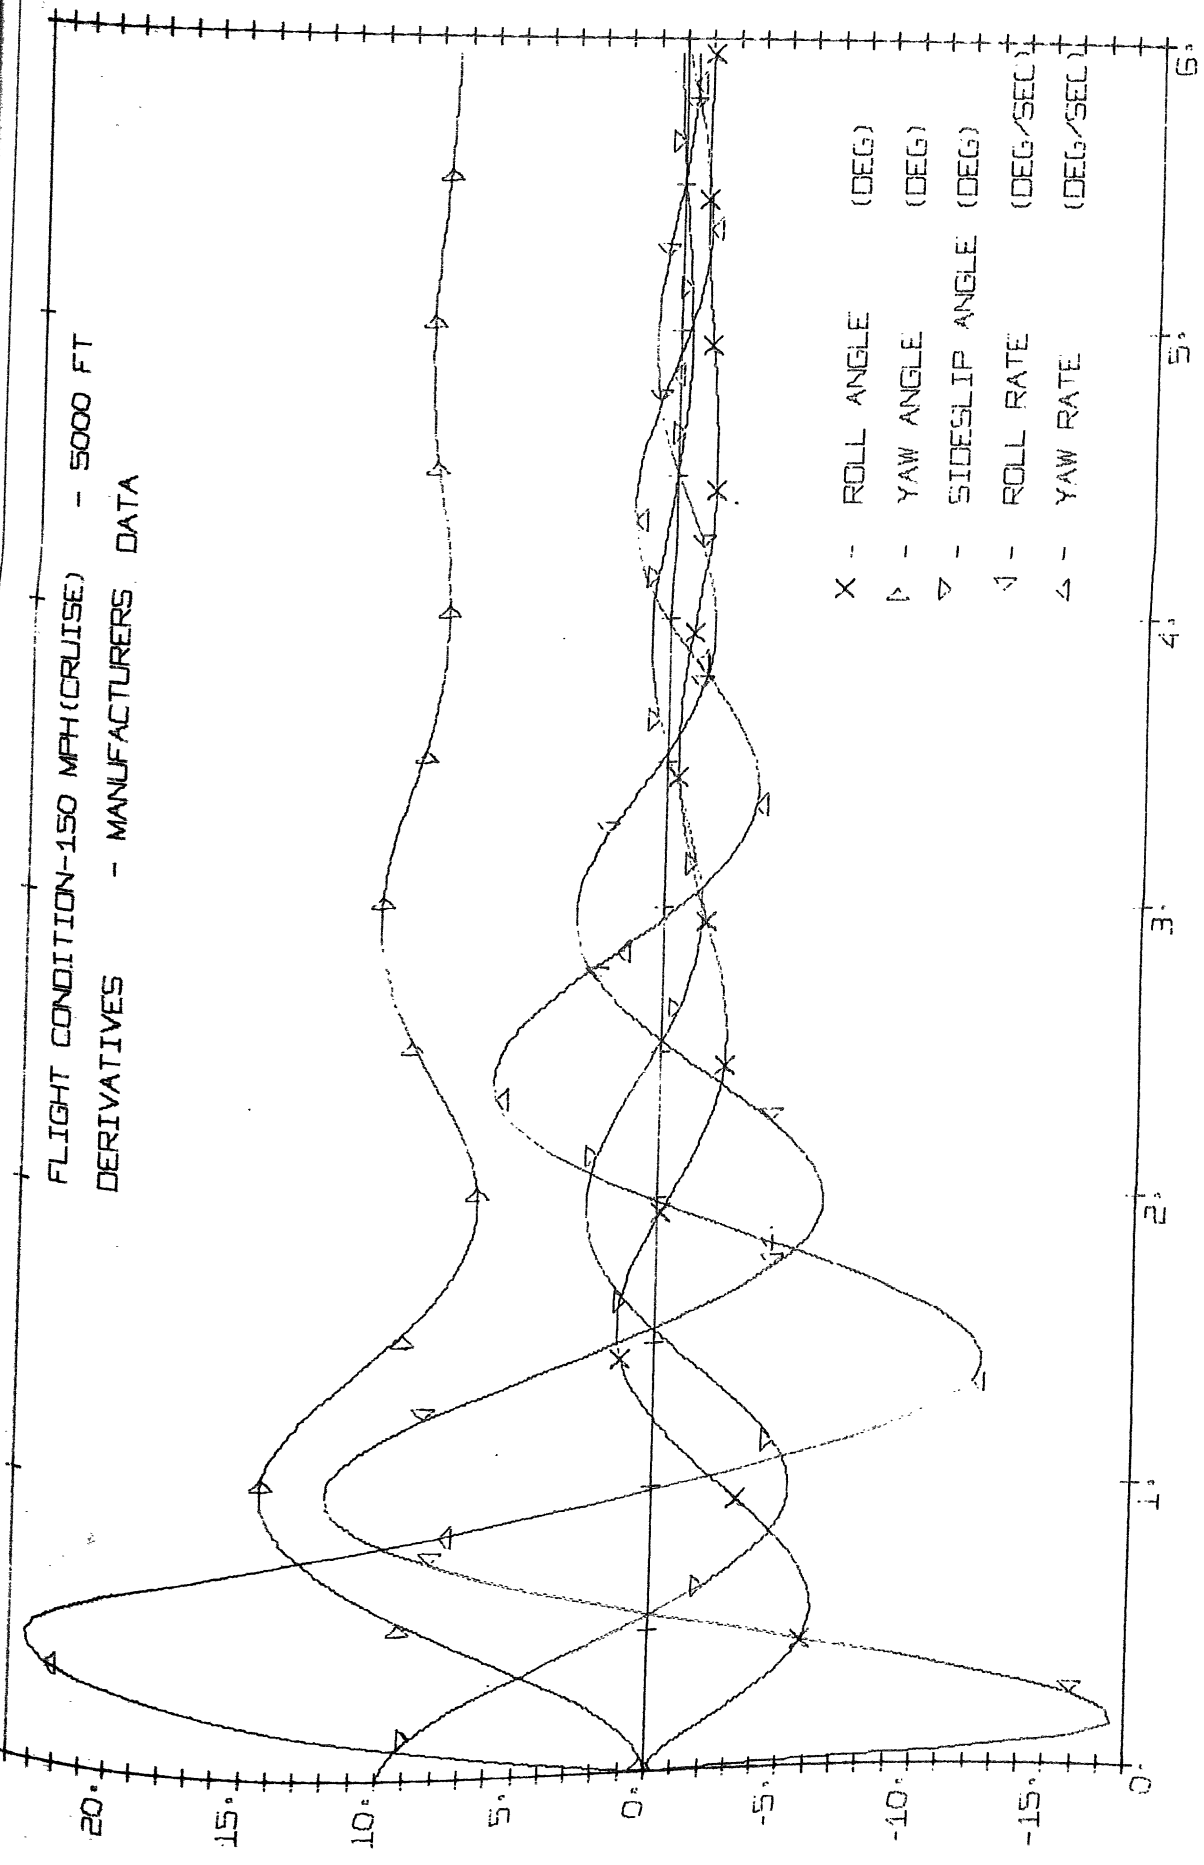

LATERAL MOTION PARAMETERS


FLIGHT CONDITION-150 MPH(CRUISE) - 5000 FT
 DERIVATIVES - ESTIMATED

X - ROLL ANGLE (DEG)
 ▽ - YAW ANGLE (DEG)
 ▽ - SIDESLIP ANGLE (DEG)
 4 - ROLL RATE (DEG/SEC)
 △ - YAW RATE (DEG/SEC)

TIME (SEC)

TIME HISTORY OF LATERAL MOTION PARAMETERS

(DISTURBANCE IN SIDESLIP ANGLE = 10 DEG)

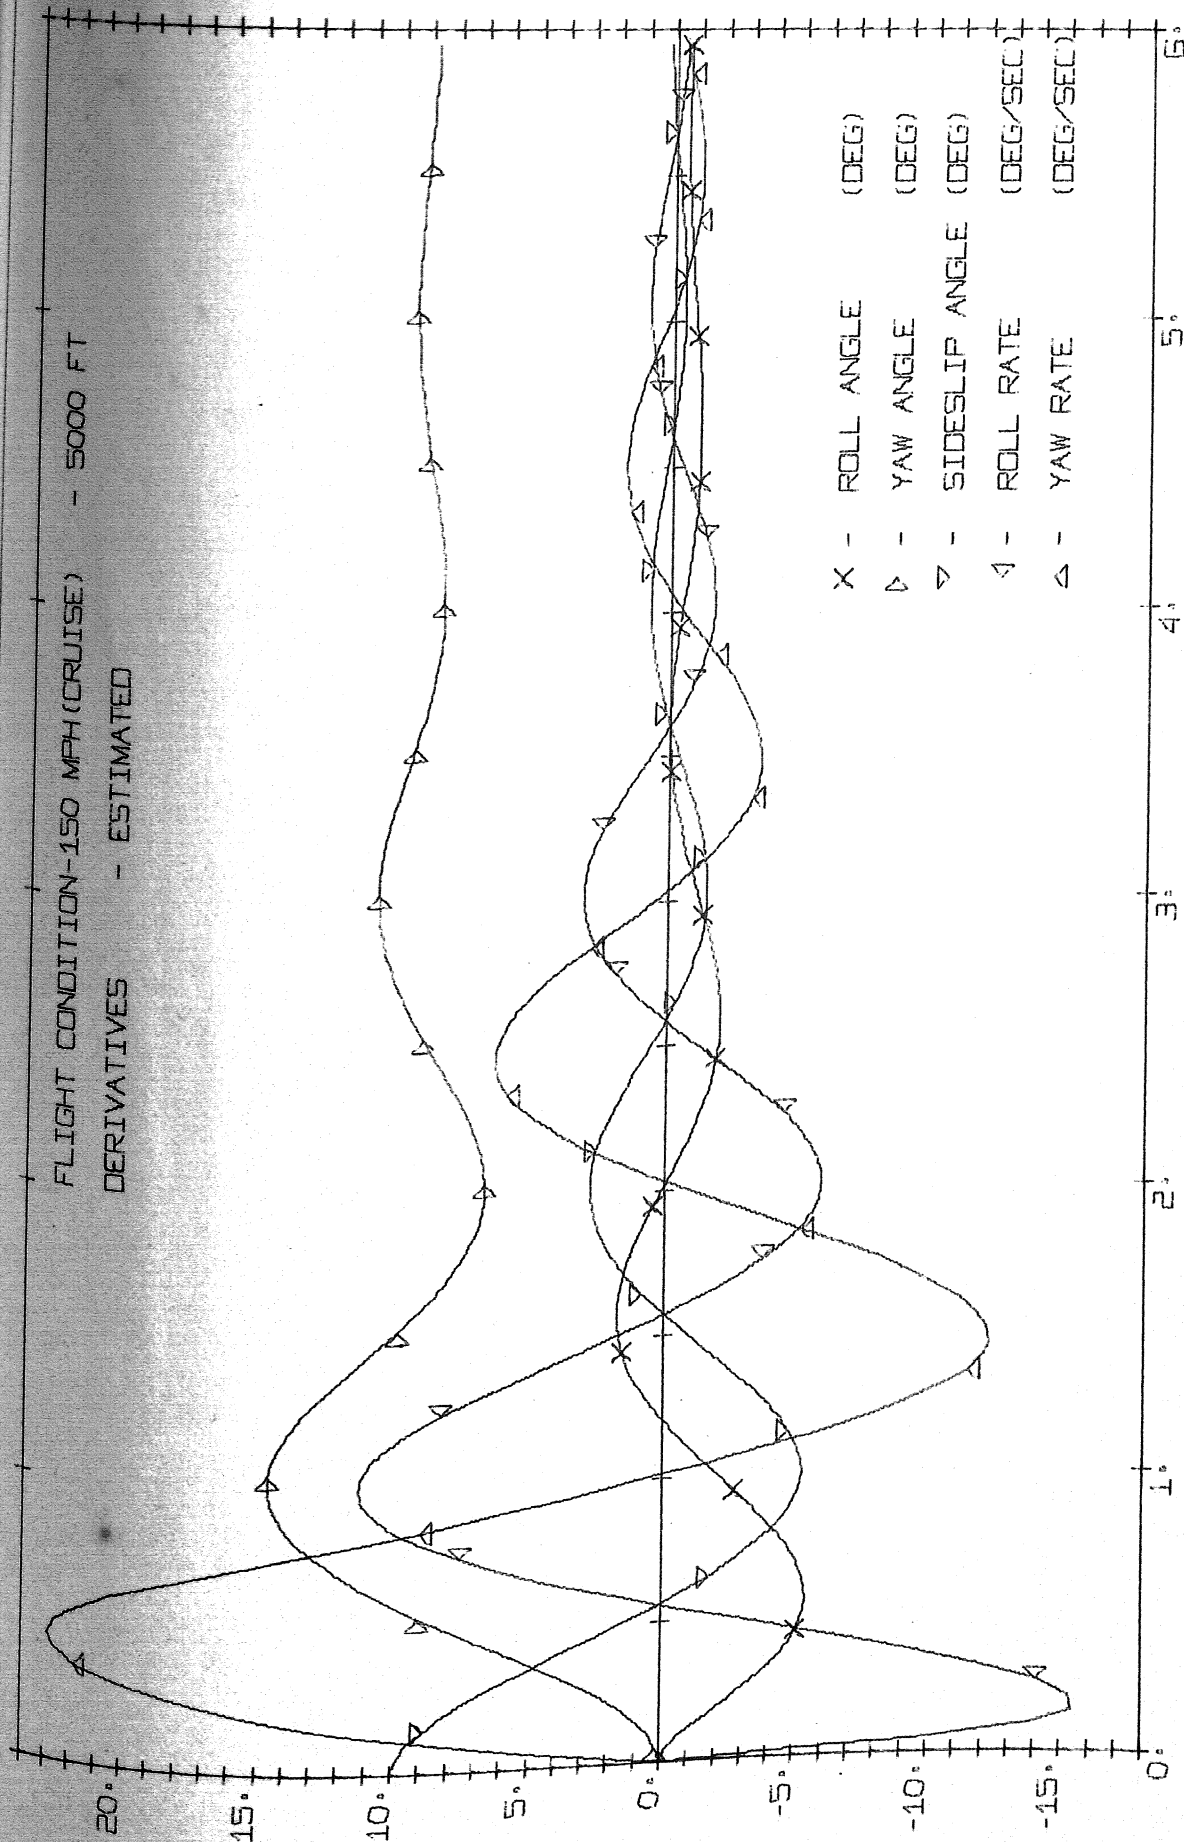

TABLES

TABLE 1 : MASS CHARACTERISTICS OF CESSNA-182H

Parameter		Units
Weight	2650.0	lbs
I_{XX}	948.0	Slugs-ft. ²
I_{ZZ}	1967.0	"
e	0.0	deg.

TABLE 2 : VARIATION OF FUSELAGE CROSS-SECTIONAL
AREA ALONG BODY CENTRE LINE

Station	Distance from Station Zero(in.)	Cross-Section Area (Sq.Ft.)	(b)x(c)	Average Cross- sectional Area= $\frac{\Sigma(d)}{\Sigma(b)}$
(a)	(b)	(c)	(d)	(e)
0	0	0	0	
1	9.5	4.58	43.5	
2	39.0	13.78	537.2	
3	69.0	18.20	1266.0	
4	105.0	16.92	1779.0	8.3 Sq.ft.
5	132.0	13.00	1716.0	
6	150.0	9.44	1416.6	
7	213.0	4.33	922.2	
8	253.0	1.10	278.5	
$\Sigma(b)=970.5$		$\Sigma(d)=7960.5$		

Average diameter $d_{av} = \sqrt{\frac{4 \times (e)}{\pi}} = 3.26 \text{ ft.}$

TABLE 3 : GEOMETRIC CHARACTERISTICS AND OTHER
RELATED CONSTANTS FOR CESSNA-182H

Component	Parameter	Value	Units	Remarks
<u>Wing</u>	Span b	36.083	ft.	
	Area S	174.38	Sq.ft.	
	Aspect Ratio A	7.46	-	
	Taper Ratio λ	0.672	-	
	Section C_{l_α}	0.105	(deg ⁻¹)	
	Sweep back angle			
	Λ , $\Lambda_{c/2}$, $\Lambda_{c/4}$	0	deg.	
	M.A.C. \bar{c}	4.925	ft.	
	Position of C.G.	26.4% of M.A.C.	-	
	Dihedral Γ	1.75	deg.	
<u>Horizontal</u>	Span b_H	11.667	ft.	
<u>Tail</u>	Area S_H	41.3	Sq.ft.	
	Aspect Ratio A_H	3.33		
	Taper Ratio λ_H	0.59		
	C_{l_α} (Section)	0.105	(deg ⁻¹)	
	Λ , $\Lambda_{c/2}$, $\Lambda_{c/4}$	0	deg	
	\bar{c}_H	3.667	ft.	
	Γ_H	0	deg	

TABLE 3 : (CONTD.)

Component	Parameter	Value	Unit	Remarks
<u>Vertical Tail</u>	Span b_V	5.333	ft.	
	Area S_V	19.36	Sq.ft.	
	Aspect Ratio $A_V = \frac{b_V^2}{S_V}$	1.468	-	
	λ_V	0.526	-	
	C_{l_α}	0.105	(deg. ⁻¹)	
	\wedge	45	deg.	
	$\wedge_{c/4}$	40	deg.	
	$\wedge_{c/2}$	36	deg.	
	\bar{c}_V	3.667	ft.	
	z_V	2.4166	ft.	
	z_W	-2.083	ft.	
	d	4.833	ft.	
<u>Body</u>	z_W/d	-0.862	-	
	l_B	24.125	ft.	
	x_1	165.0	in.	Fig.5
	x_1/l_B	0.57	-	
	x_o/l_B	0.69	-	Fig.6

TABLE 3 : (CONTD.)

Component	Parameter	Value	Unit	Remarks
<u>Body</u>	X_o	192.5	in.	
	S_o	6.0	Sq.ft.	Fig.5
	l_d	16.667	ft.	Hor. distance of L.E. of M.A.C. to M.A.C. of vertical tail.
	l_v	15.367	ft.	Fig.18
	X_m	6.667	ft.	
	S_{B_S}	68.0	Sq.ft.	
	h	4.833	ft.	
	$l_B/4$	6.033	ft.	
	$3l_B/4$	18.1	ft.	
	h_1	4.7083	ft.	
	h_2	2.0	ft.	
	$\sqrt{h_1/h_2}$	1.535	-	
	w	4.0833	ft.	
	h/w	1.182	-	
	l_B^2/S_{B_S}	8.55	-	
	Average cross-sectional area	8.30	Sq.ft.	Weighted average from Table 2.
	d_{av}	3.26	ft.	

TABLE 3: (CONTD.)

Component	Parameter	Value	Unit	Remarks
<u>Wing-Body</u>	l_f	7.58	ft.	
	l_f/b	0.204		
<u>Tail-Body</u>	$2r_1$	1.5	ft.	
	$b_V/2r_1$	3.55		
	X	1.667	ft.	
	$C_V = C_{R_V}$	4.75	ft.	Tail root chord is taken as the chord along the body centre line.
	X/C_V	0.351	-	
	Z_H	0.0	ft.	
	Z_H/b_V	0.0	-	
	l_{f_H}	20.5	ft.	
	l_{f_H}/b_H	1.76	-	
<u>Miscellaneous</u>	Mach No. M	0	-	
	$\beta = \sqrt{1-M^2}$	1	-	
	$A/\cos \wedge_{c/4} = A$	2.135	-	
	$M \cos \wedge_{c/2}$	0.0	-	
	S_H/S_V	2.135	-	

TABLE 3 : (CONTD.)

Component	Parameter	Value	Unit	Remarks
<u>Other Factors</u>	K_i	1.72	-	Fig.4
	k	1.0	-	Fig.7
	$\frac{A_V(B)}{A_V}$	1.2	-	Fig.8
	$\frac{A_V(HB)}{A_V(B)}$	1.0	-	Fig.9
	K_H	1.14	-	Fig.10
	$((\frac{C_{L\beta}}{C_L})_{c/2})_W$	0.0	(deg. ⁻¹)	Fig.11
	$((\frac{C_{L\beta}}{C_L})_{H_{c/2}})_H$	0.0	(deg. ⁻¹)	Fig.11
	K_M	1.0	-	Fig.12
	$(K_f)_W$	0.99	-	Fig.13
	$(K_f)_H$	1.00	-	Fig.13
	$((C_{L\beta}/C_L)_A)_W$	-0.0005	(deg. ⁻¹)	Fig.14
	$((\bar{\quad})_A)_H$	-0.0021	(")	Fig.14
	$(C_{L\beta}/\Gamma)_W$	-0.00023	(deg. ⁻²)	Fig.15
	$(\bar{\quad})_H$	-0.000155	(")	Fig. 15

TABLE 3 : (CONTD.)

Component	Parameter	Value	Units	Remarks
	$(K_{M_f})_W$	1.00	-	Fig.16
	$(K_{M_f})_H$	1.00	-	Fig.16
	$(\Delta c_{l\beta} / \tan c/4)_W$	-0.000037	(deg ⁻²)	Fig.17
	(" ") _H	-0.000025	"	Fig.17
	K_N	.00115	-	Fig.19
	\mathcal{K}	0.9584	-	
	$(\beta A / \mathcal{K})_W$	7.79	-	
	$(\beta A / \mathcal{K})_H$	3.45	-	
	βc_l			
	$(\frac{p}{\mathcal{K}})_W$	-0.485	(rad ⁻¹)	Fig.23
	(") _H	-0.24	(")	Fig.23
	$\frac{c_{np}}{c_L}$			
	$(\frac{p}{c_L})_{c_L=0}$	-0.1085	(")	
	$M=0$			
	(") _{c_L=0}	-0.1085	(")	
	M			
	$(\Delta c_{np} / \theta)$	0.000057 $\frac{1}{\text{rad-deg}}$		Fig.25

TABLE 3: (CONTD.)

Component	Parameter	Value	Units	Remarks
(C_{L_r})	$(C_{L_r}/C_L)_{C_L=0}$ $M=0$	0.24	(rad^{-1})	Fig.26
	$(\Delta C_{L_r}/\theta)$	-0.0145	$\frac{1}{(\text{rad-deg})}$	Fig.27
	(C_{n_r}/C_L^2)	-0.02	(rad^{-1})	Fig.28
	(C_{n_r}/\bar{C}_{D_o})	-0.3	"	Fig.29
	C_{L_α}	4.69	"	
	$C_{L_{\alpha_W}}$	4.65	"	
	$C_{L_{\alpha_H}}$	3.475	"	
	K_β	0.14		Fig.21
	$\frac{(\Delta C_{n_p})_1}{C_L}$	-0.06	(rad^{-1})	Fig.24
	$\frac{(\Delta C_{n_p})_2}{(C_{D_o})_\alpha}$	9.5	(deg^{-1})	Fig.24

TABLE 4 : FLIGHT CONDITIONS AND ALLIED PARAMETERS

Parameters Flight Conditions	Velocity MPH	Altitude Ft.	Density Slugs/cu.ft.
Approach	73	S.L.	.0002378
Cruising	150	5,000	.0002049

TABLE 5 : PARAMETERS DEPENDENT ON FLIGHT CONDITIONS

Parameters	Unit	Approach	Cruising
C_L	-	1.1150	0.306
C_D	-	0.132	0.032
C_{D_α}	-	0.547	0.121
C_{L_H}	-	0.3975	0.01393
\dot{V}	ft. ² /sec.	156.4×10^{-6}	176.6×10^{-6}
$R_e = \frac{l_B V}{\dot{V}}$	-	16.51×10^6	30.15×10^6
K_{R_L}	-	1.61	1.74

TABLE 6(a) : COMPARISON OF CONTRIBUTION OF VARIOUS COMPONENTS
TO STABILITY DERIVATIVES ESTIMATED FROM
REFERENCES 1 TO 5 (APPROACH AT 73 mph)

Deriva- tive	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5	Manufacturers Data
$C_{Y\beta_W}$	N/A	N/A	N/A	N/A	-0.0099	N/A
$C_{Y\beta_B}$	N/A	N/A	N/A	N/A	-0.1186	N/A
$C_{Y\beta_V}$	N/A	N/A	N/A	N/A	-0.1908	N/A
$C_{Y\beta}$	N/A	N/A	N/A	N/A	-0.3191	-0.303
$C_{l\beta_{WB}}$	-0.1208	-0.1208	-0.1817	-0.01208	-0.0919	N/A
$C_{l\beta_H}$	Neg.	-0.0028	Neg.	Neg.	-0.0024	N/A
$C_{l\beta_V}$	0.0026	0.0024	0.0026	0.0024	0.0024	N/A
$C_{l\beta_r}$	-0.1182	-0.1212	-0.1791	-0.1183	-0.0919	-0.097
$C_{n\beta_W}$	0.0249	0.0274	Neg.	0.0249	Neg.	N/A
$C_{n\beta_B}$	-0.0492	-0.0492	-0.0012	-0.0492	-0.0276	N/A
$C_{n\beta_V}$	0.0928	0.0928	0.0928	0.0928	0.0857	N/A
$C_{n\beta}$	0.0684	0.0709	0.0916	0.0684	0.0580	0.0701

TABLE 6(a) : (CONTD.)

Deriva- tive	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5	Manufacturers Data
C_{Y_p}	0.0353	Neg.	Neg.	0.0304	0.0049	-0.2134
$C_{l_{PW}}$	-0.4596	-0.4596	-0.4596	-0.4732	-0.4596	N/A
$C_{l_{PH}}$	Neg.	Neg.	Neg.	-0.0033	-0.0033	N/A
$C_{l_{PV}}$	N/A	N/A	N/A	-0.0004	-0.0017	N/A
C_{l_p}	-0.4596	-0.4596	-0.4596	-0.4770	-0.4646	-0.494
$C_{n_{PW}}$	-0.0508	-0.0508	-0.1394	-0.0508	-0.1216	N/A
$C_{n_{PV}}$	-0.0159	-0.0137	Neg.	-0.0137	-0.0022	N/A
C_{n_p}	-0.0667	-0.0645	-0.1394	-0.0645	-0.1238	-0.096
C_{Y_r}	0.2182	Neg.	Neg.	0.1714	0.1714	0.2010
$C_{l_{rW}}$	0.2676	0.2676	0.2787	0.2676	0.2676	N/A
$C_{l_{rH}}$	Neg.	0.0006	Neg.	Neg.	Neg.	N/A
$C_{l_{rV}}$	-0.0028	-0.0022	Neg.	-0.0022	-0.0022	N/A
C_{l_r}	0.2648	0.2660	0.2787	0.2654	0.2654	0.2039
$C_{n_{rW}}$	-0.0484	-0.0484	-0.0484	-0.0484	-0.0484	N/A

TABLE 6(a):(CONTD.)

Deriva- tive	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5	Manufacturers Data
$C_{n_{rv}}$	-0.077	-0.077	-0.077	-0.077	-0.077	N/A
C_{n_r}	-0.1254	-0.1254	-0.1254	-0.1254	-0.1254	-0.115

Note: 1. N.A. - No method available or value not available.

Neg. - Neglected.

Note: 2. The values of roll-rate derivatives estimated by the method of Ref.6 are as follows:

$$C_{y_p} = -0.1132$$

$$C_{l_p} = -0.4783$$

$$C_{n_p} = -0.097$$

TABLE 6(b) : COMPARISON OF CONTRIBUTION OF VARIOUS
COMPONENTS TO STABILITY DERIVATIVES
ESTIMATED FROM REFERENCES 1 TO 5
(CRUISE AT 150 m.p.h)

Derivative	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5	Manufacturer's Data
$C_{Y\beta_W}$	N/A	N/A	N/A	N/A	-0.0099	N/A
$C_{Y\beta_B}$	N/A	N/A	N/A	N/A	-0.1184	N/A
$C_{Y\beta_V}$	N/A	N/A	N/A	N/A	-0.1908	N/A
$C_{Y\beta}$	N/A	N/A	N/A	N/A	-0.3191	-0.303
$C_{l\beta_{WB}}$	-0.0884	-0.0884	-0.0675	-0.0884	-0.0688	N/A
$C_{l\beta_H}$	Neg.	0.0013	Neg.	Neg.	0.0013	N/A
$C_{l\beta_V}$	-0.0133	-0.0123	-0.0133	-0.0123	-0.0123	N/A
$C_{l\beta}$	-0.1017	-0.1006	-0.0808	-0.1007	-0.0798	-0.0923
$C_{n\beta_W}$	0.0019	0.0026	Neg.	0.0019	Neg.	N/A
$C_{n\beta_B}$	-0.0492	-0.0492	-0.0012	-0.0492	-0.0299	N/A
$C_{n\beta_V}$	0.0918	0.0918	0.0918	0.0918	0.0849	N/A
$C_{n\beta}$	0.0445	0.0452	0.0907	0.0445	0.0550	0.0587

TABLE 6(b) : (CONTD.)

Deriva- tive	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5	Manufacturer's Data
C_{Y_p}	0.0319	Neg.	Neg.	0.00105	-0.0245	-0.0752
$C_{l_{PW}}$	-0.4596	-0.4596	-0.4596	-0.461	-0.4596	N/A
$C_{l_{PH}}$	Neg.	Neg.	Neg.	-0.0033	-0.0033	N/A
$C_{l_{PV}}$	N/A	N/A	N/A	0.0001	-0.0017	N/A
C_{l_p}	-0.4596	-0.4596	-0.4596	-0.4643	-0.4646	-0.484
$C_{n_{PW}}$	-0.0184	-0.0184	-0.0383	-0.0184	-0.0333	N/A
$C_{n_{PV}}$	-0.0142	-0.0005	Neg.	-0.0005	0.0109	N/A
C_{n_p}	-0.0326	-0.0188	-0.0383	-0.0188	-0.0224	-0.0278
C_{Y_r}	0.2160	Neg.	Neg.	0.1697	0.1697	0.214
$C_{l_{rW}}$	0.0736	0.0736	0.0766	0.0736	0.0736	N/A
$C_{l_{rH}}$	Neg.	-0.0003	Neg.	Neg.	Neg.	N/A
$C_{l_{rV}}$	0.0139	0.0109	Neg.	0.0109	0.0109	N/A
C_{l_r}	0.0874	0.0841	0.0766	0.0845	0.0845	0.0798
$C_{n_{rW}}$	-0.0109	-0.0109	-0.0109	-0.0109	-0.0109	N/A

TABLE 6(b) : (CONTD.)

Deriva- tive	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5	Manufactur- er's Data
C_{nrv}	-0.0755	-0.0755	-0.0755	-0.0755	-0.0755	N/A
C_{nr}	-0.0864	-0.0864	-0.0864	-0.0864	-0.0864	-0.0937

Note 1 : N.A. : No method available or value not available.

Neg. : Neglected.

Note 2 : The values of roll-rate derivatives estimated by the method of Ref.6 are as follows:

$$C_{yp} = -0.0403 \quad C_{lp} = -0.4661 \quad C_{np} = -0.032$$

TABLE 7(a) : COMPARISON OF ESTIMATED AND AVAILABLE
VALUES OF STABILITY DERIVATIVES (APPROACH
AT 73 m.p.h.)

Derivative	Percentage Error From the Manufacturer's Values				
	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5
$C_{l\beta}$	21.8*	22.0*	84.6*	22.0*	5.3**
$C_{n\beta}$	2.4*	1.2**	30.6**	2.4*	17.2*
$C_{Y\beta}$	N.E.	N.E.	N.E.	N.E.	5.3*
C_{lp}	6.0**	6.0**	6.0**	3.5**	5.9**
C_{np}	30.5**	32.8**	45.2**	32.8**	28.9*
C_{Yp}	116.0**	N.E.	N.E.	114.0**	102.0**
C_{lr}	29.8**	30.5**	36.7**	30.1**	30.1**
C_{nr}	9.0*	9.0*	9.0*	9.0*	9.0*
C_{Yr}	8.6**	N.E.	N.E.	14.7*	14.7*

Note: N.E. - not estimated

* means less than the manufacturer's value

** means more than the manufacturer's value

TABLE 7(b) : COMPARISON OF ESTIMATED AND AVAILABLE VALUES
OF STABILITY DERIVATIVES (CRUISE AT 150 m.p.h.)

Derivative	Percentage Error From the Manufacturer's Values				
	Ref.1	Ref.2	Ref.3	Ref.4	Ref.5
$C_{L\beta}$	10.2*	9.1*	12.5**	9.1*	13.6**
$C_{n\beta}$	24.2*	23.0*	54.5**	24.2*	6.4*
$C_{Y\beta}$	N.E.	N.E.	N.E.	N.E.	5.3*
C_{Lp}	6.0**	6.0**	6.0**	4.0**	4.0**
C_{np}	17.3**	32.2*	37.8**	32.2*	19.5*
C_{Yp}	142.5**	N.E.	N.E.	101.4**	67.4**
C_{Lr}	9.6**	5.4**	3.9*	5.8**	5.8**
C_{nr}	7.8**	7.8**	7.8**	7.8**	7.8**
C_{Yr}	1.0**	N.E.	N.E.	20.7*	20.7**

Note: N.E. means not estimated.

* means less than manufacturer's value.

** means more than manufacturer's value.

TABLE 8 : A CONSOLIDATED LIST OF ESTIMATED AND AVAILABLE
VALUES OF STABILITY DERIVATIVES

Deri- vat- ives	Flight condition	Cruise		Approach	
		Estimated	Manufactu- rer's Data	Estimated	Manufactu- rer's Data
$C_{l\beta}$		-0.0798	-0.0923	-0.0919	-0.097
$C_{n\beta}$		0.0550	0.0587	-0.0580	0.0701
$C_{Y\beta}$		-0.3191	-0.303	-0.3191	-0.303
C_{lp}		-0.4628	-0.484	-0.4633	-0.494
C_{np}		-0.0337	-0.0278	-0.1353	-0.0960
C_{Yp}		0.0010	-0.0752	0.0304	-0.2134
C_{lr}		0.0845	0.0798	0.2654	0.2039
C_{nr}		-0.0864	-0.0937	-0.1254	-0.1150
C_{Yr}		0.1697	0.214	0.1714	0.201

TABLE 9(a) : PERIOD AND DAMPING CHARACTERISTICS
(APPROACH AT 73 m.p.h)

Mode	Root		$T_{1/2}$		P	
	Estima- ted	Manufac- turer's Data	Estima- ted	Manufac- turer's Data	Estima- ted	Manufac- turer's Data
Spiral	-.0101	-.024	126.7	53.5	-	-
Rolling	-12.31	-13.56	0.1044	0.0945	-	-
Dutch Roll	-1.408 $\pm i 3.64$	-1.08 $\pm i 3.74$	0.9119	1.189	3.197	3.112


TABLE 9(b) : PERIOD AND DAMPING CHARACTERISTICS
(CRUISE AT 150 m.p.h)

Mode	Root		$T_{1/2}$		P	
	Est.	Mfr. Data	Est.	Mfr. Data	Est.	Mfr. Data
Spiral	-.0117	-.01887	61.78	38.45	-	-
Rolling	-13.09	-13.712	0.0554	0.0529	-	-
Dutch Roll	- 0.65 $\pm i 3.25$	- 0.688 $\pm i 3.325$	1.1066	1.0539	2.023	1.978

$$T_{1/2} = - \frac{0.69}{\operatorname{Re}(\lambda)} \times \tau \quad ; \quad P = \frac{2\pi}{\operatorname{Im}(\lambda)} \times \tau$$

FIGURES

SCALE



MAX. 6'-10"

7'-11 1/2"

(b)

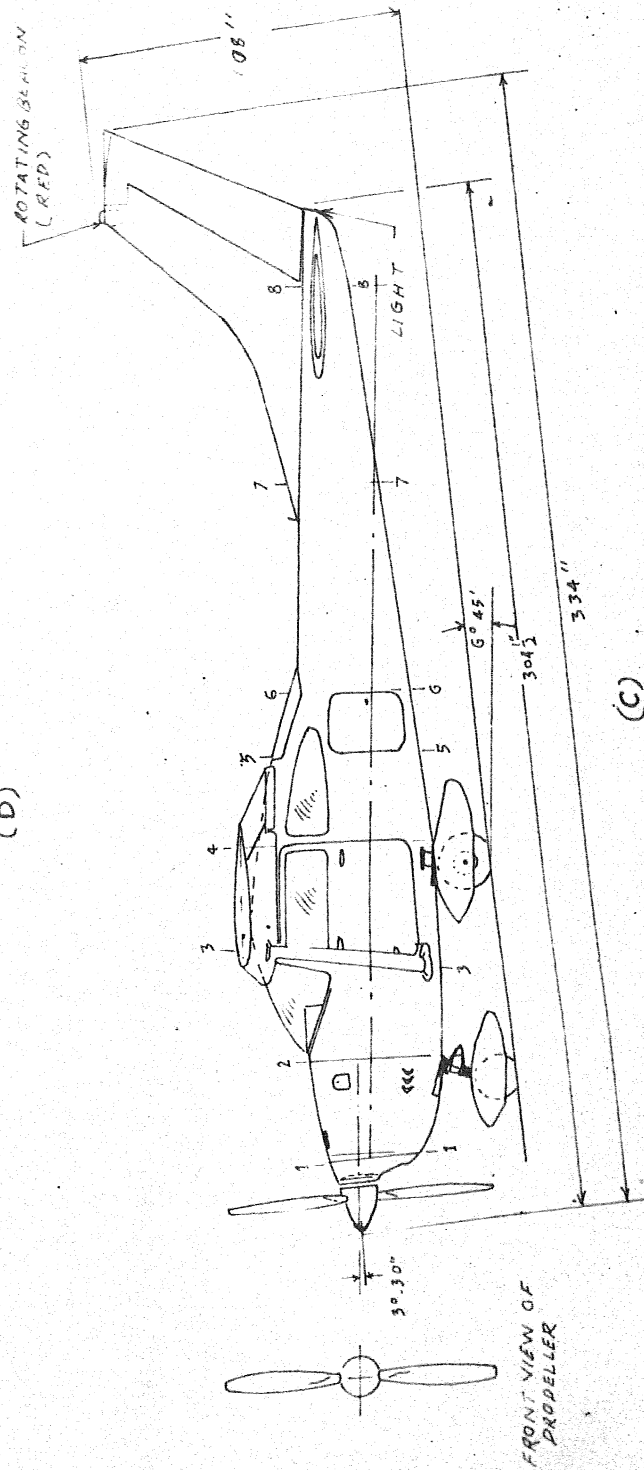


Fig-1(b&c) - Cessna 182-H Airplane

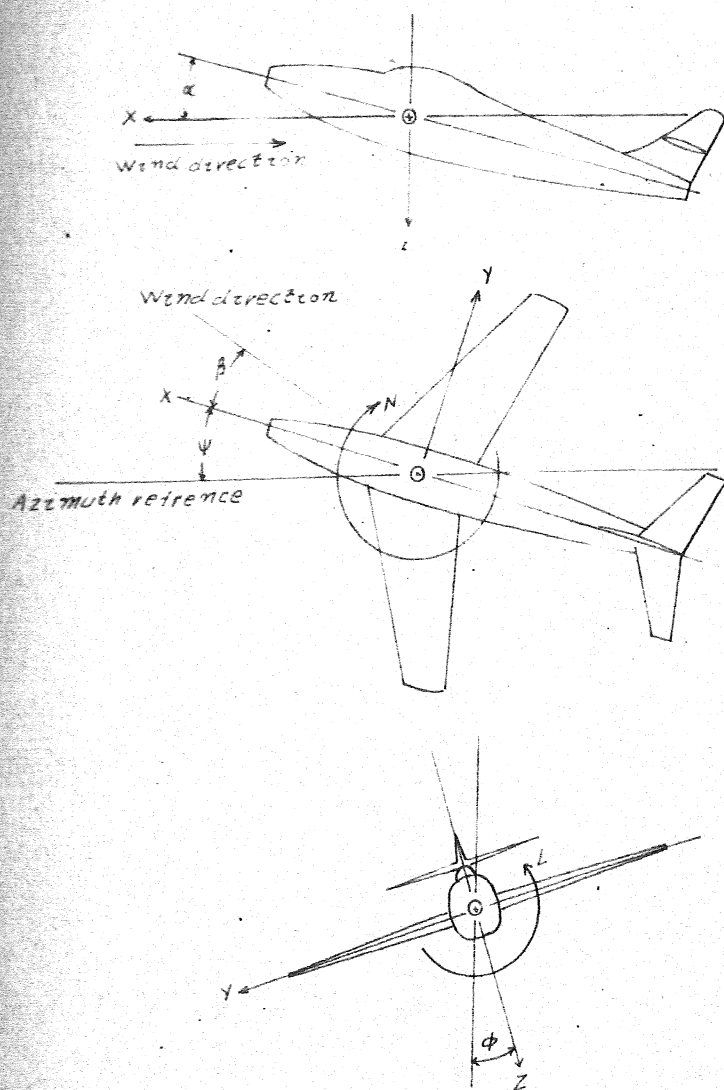


Fig. 2-System of Axes.

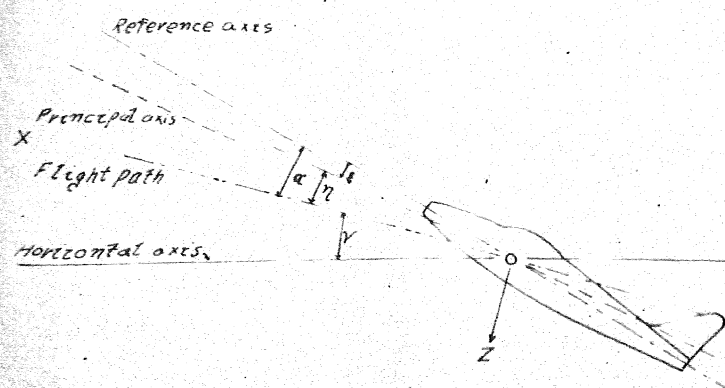


Fig. 3. System of Axes and Angular Relationships in Flight.

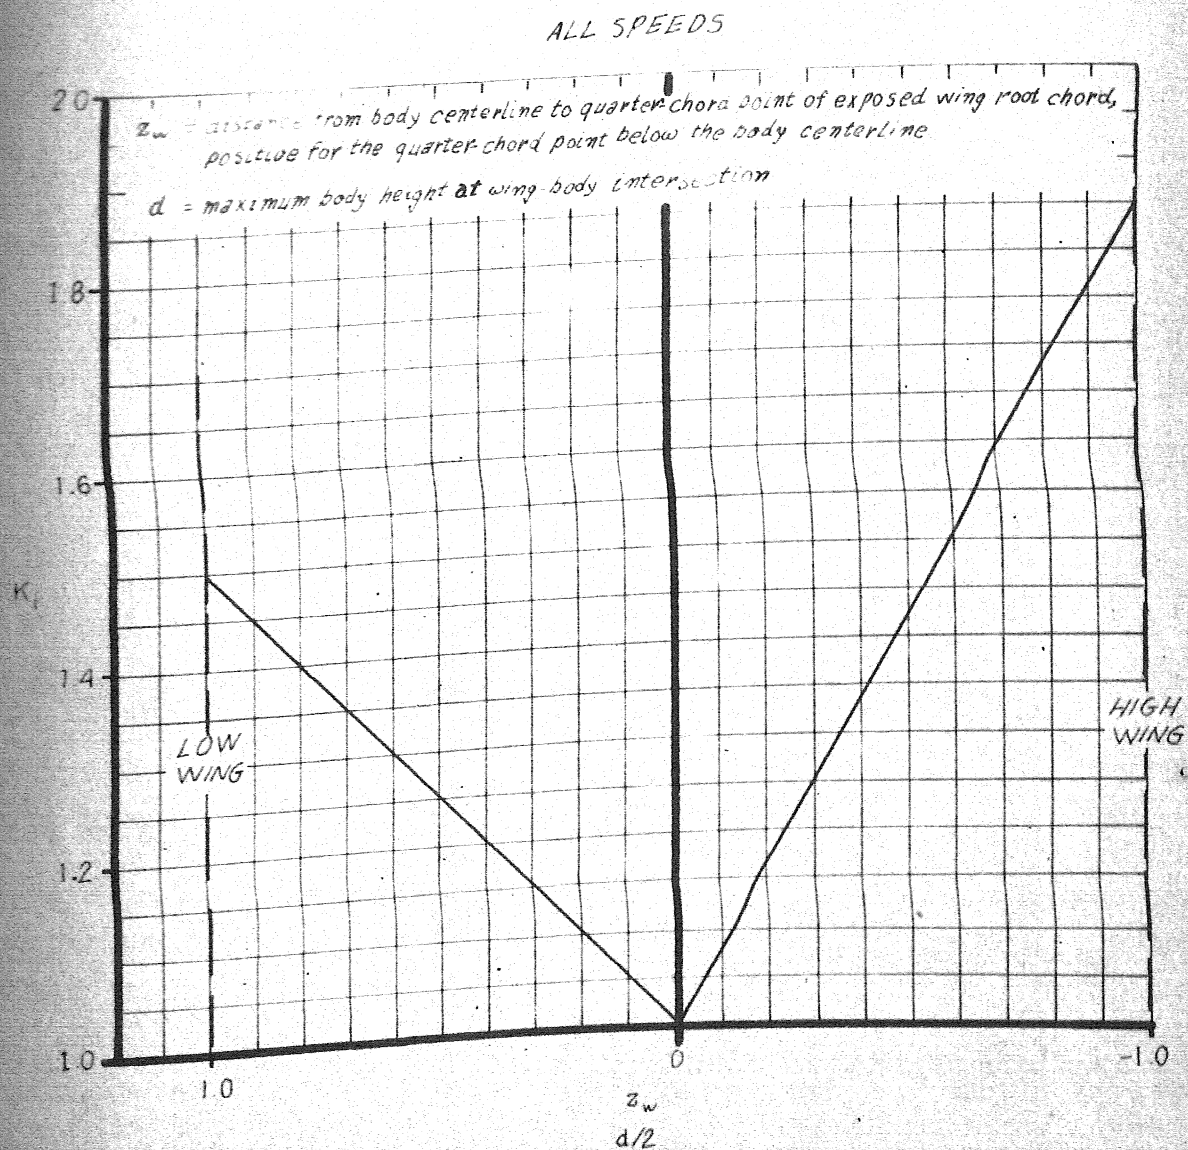


Figure 4. Wing-Body Interference Factor for Wing-Body Sideslip
 Derivative $C_{y\beta}$

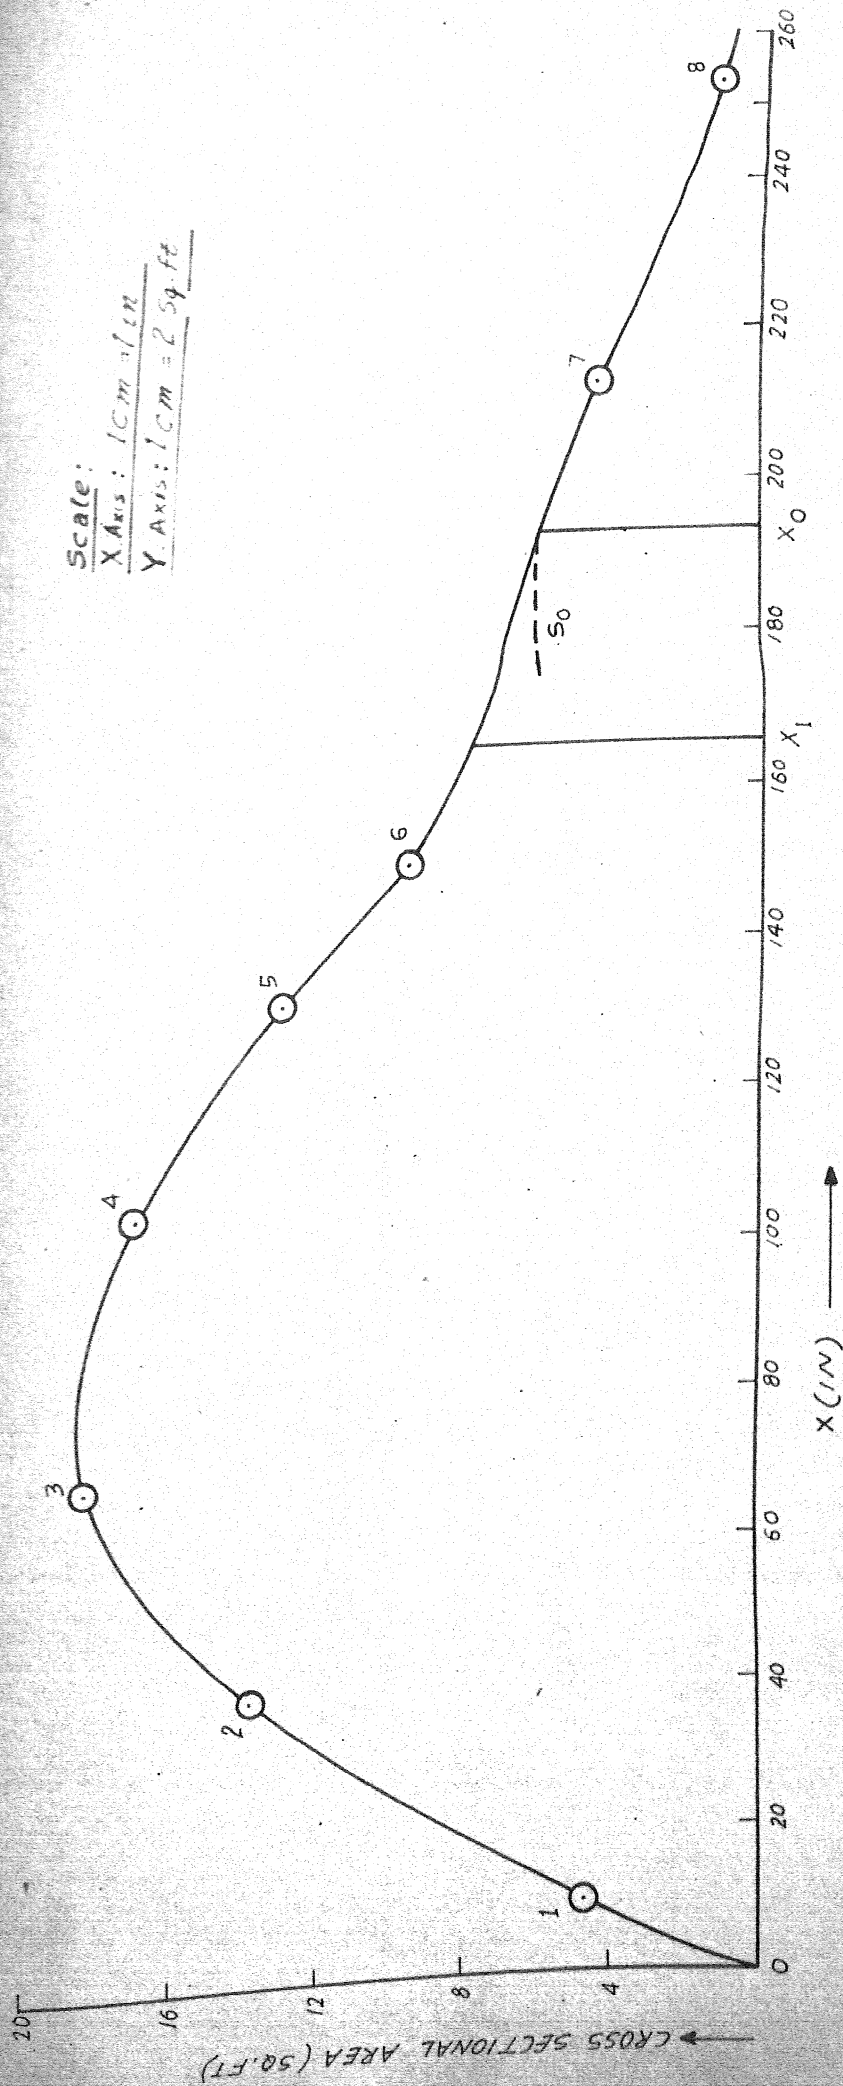


Fig-5. Variation of Fuselage Cross-Sectional Area Along Body Centre Line.


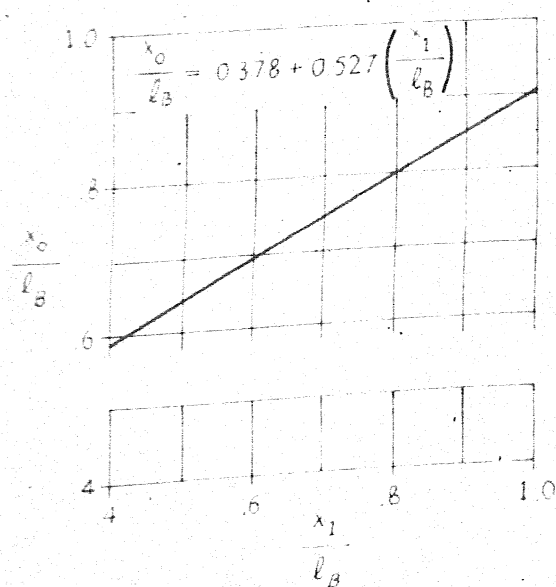


Figure 6. Body Station Where Flow Becomes Viscous

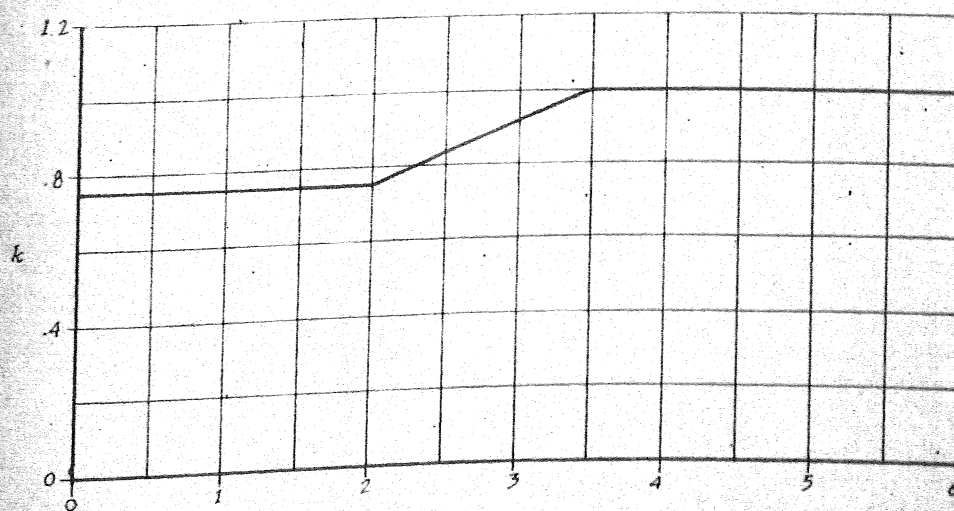

(For definition of $2r_1$ see Figure 8)

Figure 7. Empirical Factor for Estimating the Sideslip Derivative
 $C_{y\beta_v}$ for Single Vertical Tails

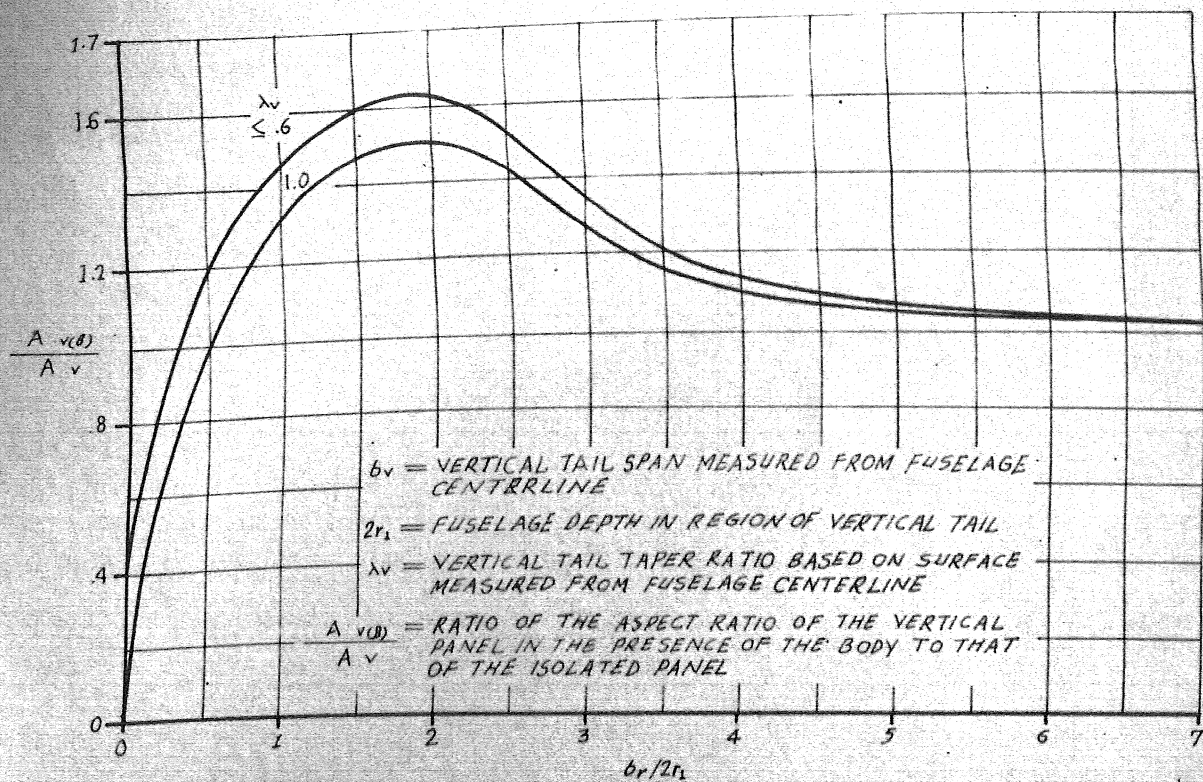


Figure 8. Aspect Ratio Factor due to Body Interference, used for Estimating the Sideslip Derivative $C_{y_{\beta_v}}$ for Single Vertical Tails

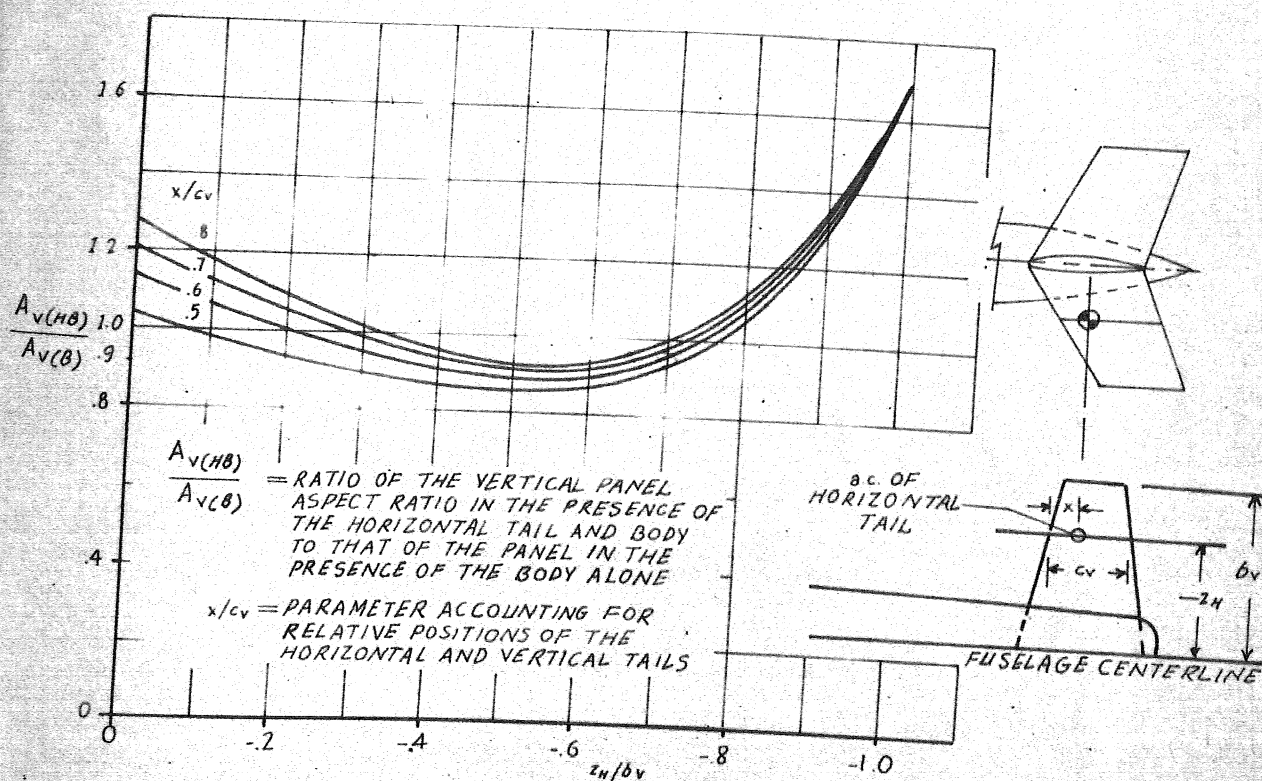


Figure 9. Aspect Ratio Factor due to Horizontal Tail Interference, Used for Estimating the Sideslip Derivative C_{yB_v} for Single Vertical Tails

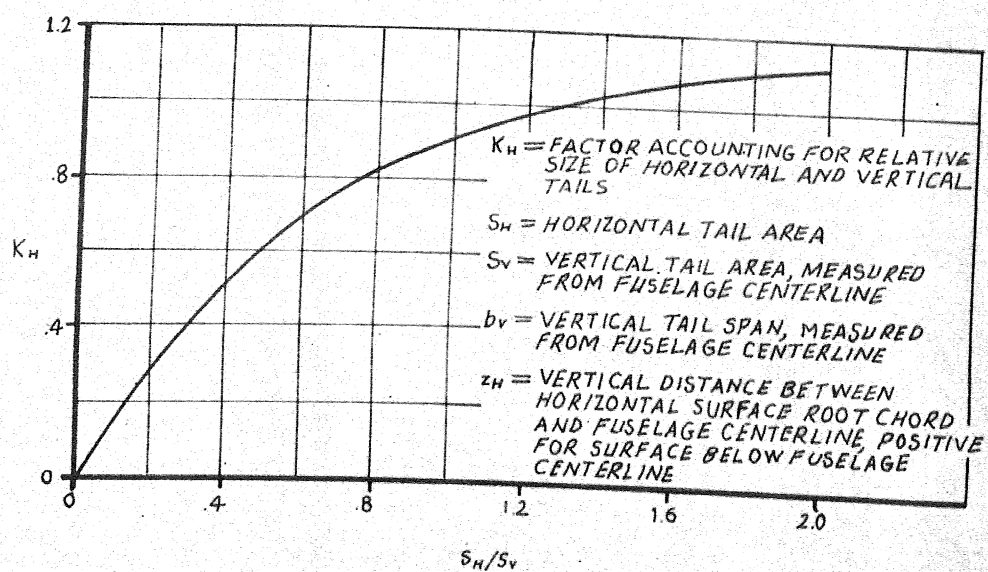


Figure .10. Factor Accounting for Relative Size of Horizontal and Vertical Tails

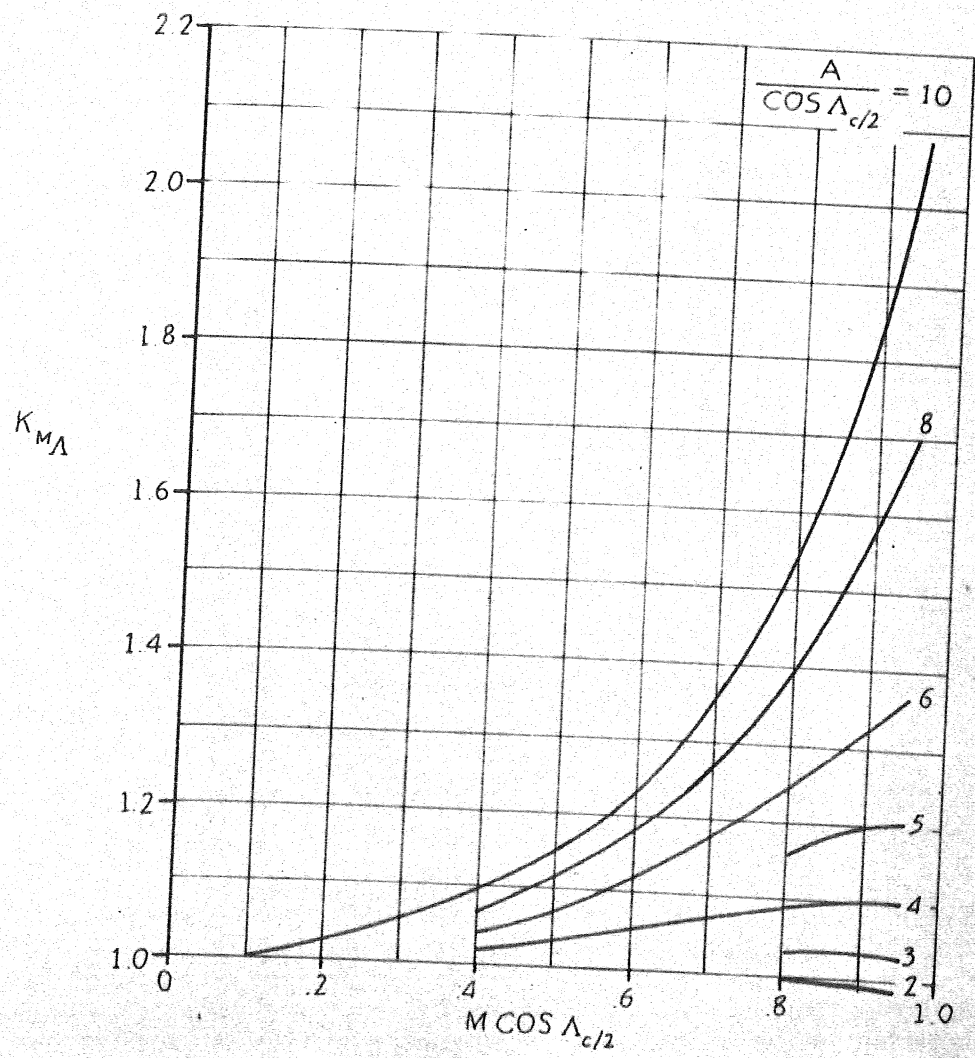


Figure. 12 Compressibility Correction Factor to Sweep Contribution to wing $C_{l\beta}$

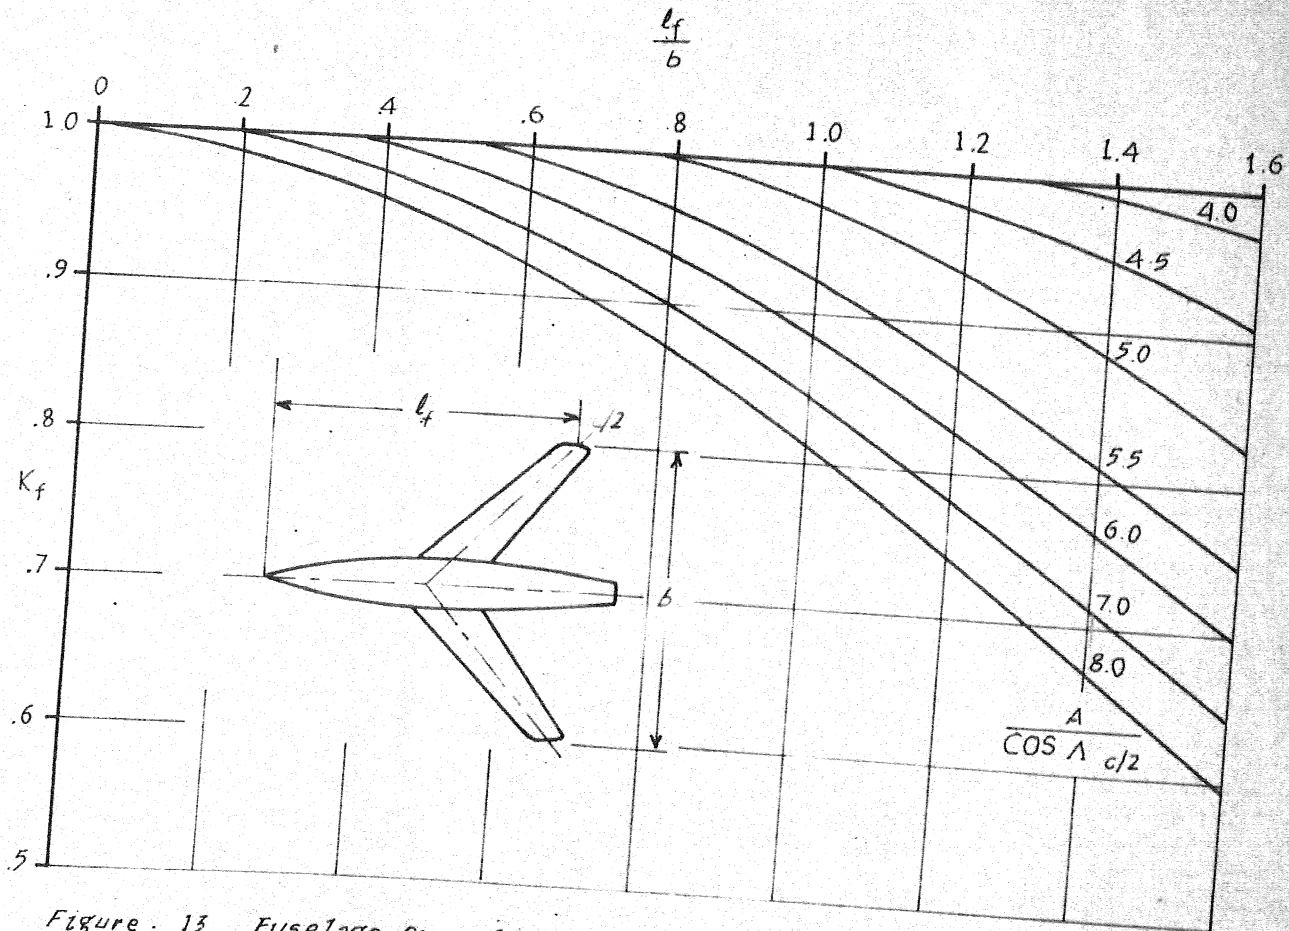


Figure 13. Fuselage Correction Factor

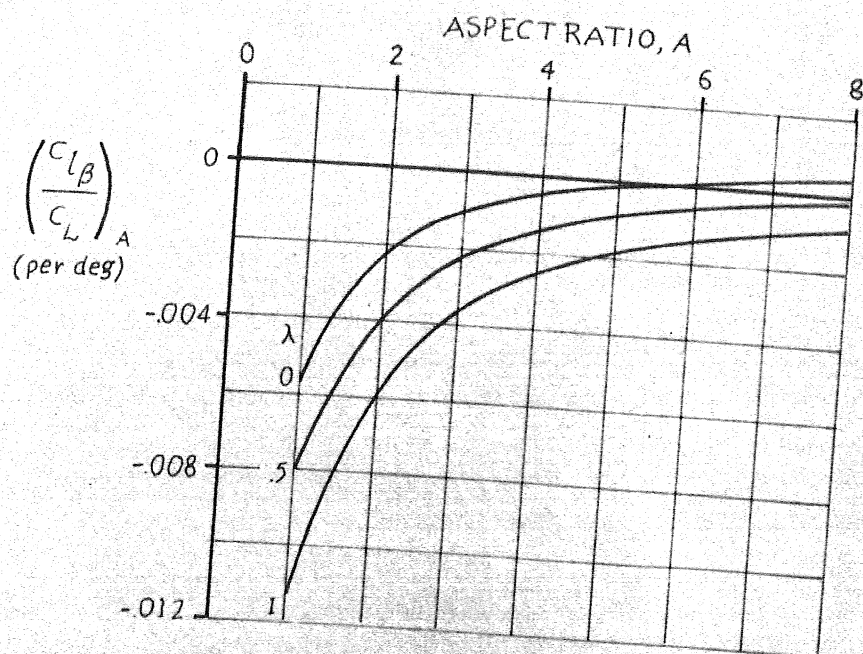


Figure 14. Aspect Ratio Contribution to Wing $C_{l\beta}$

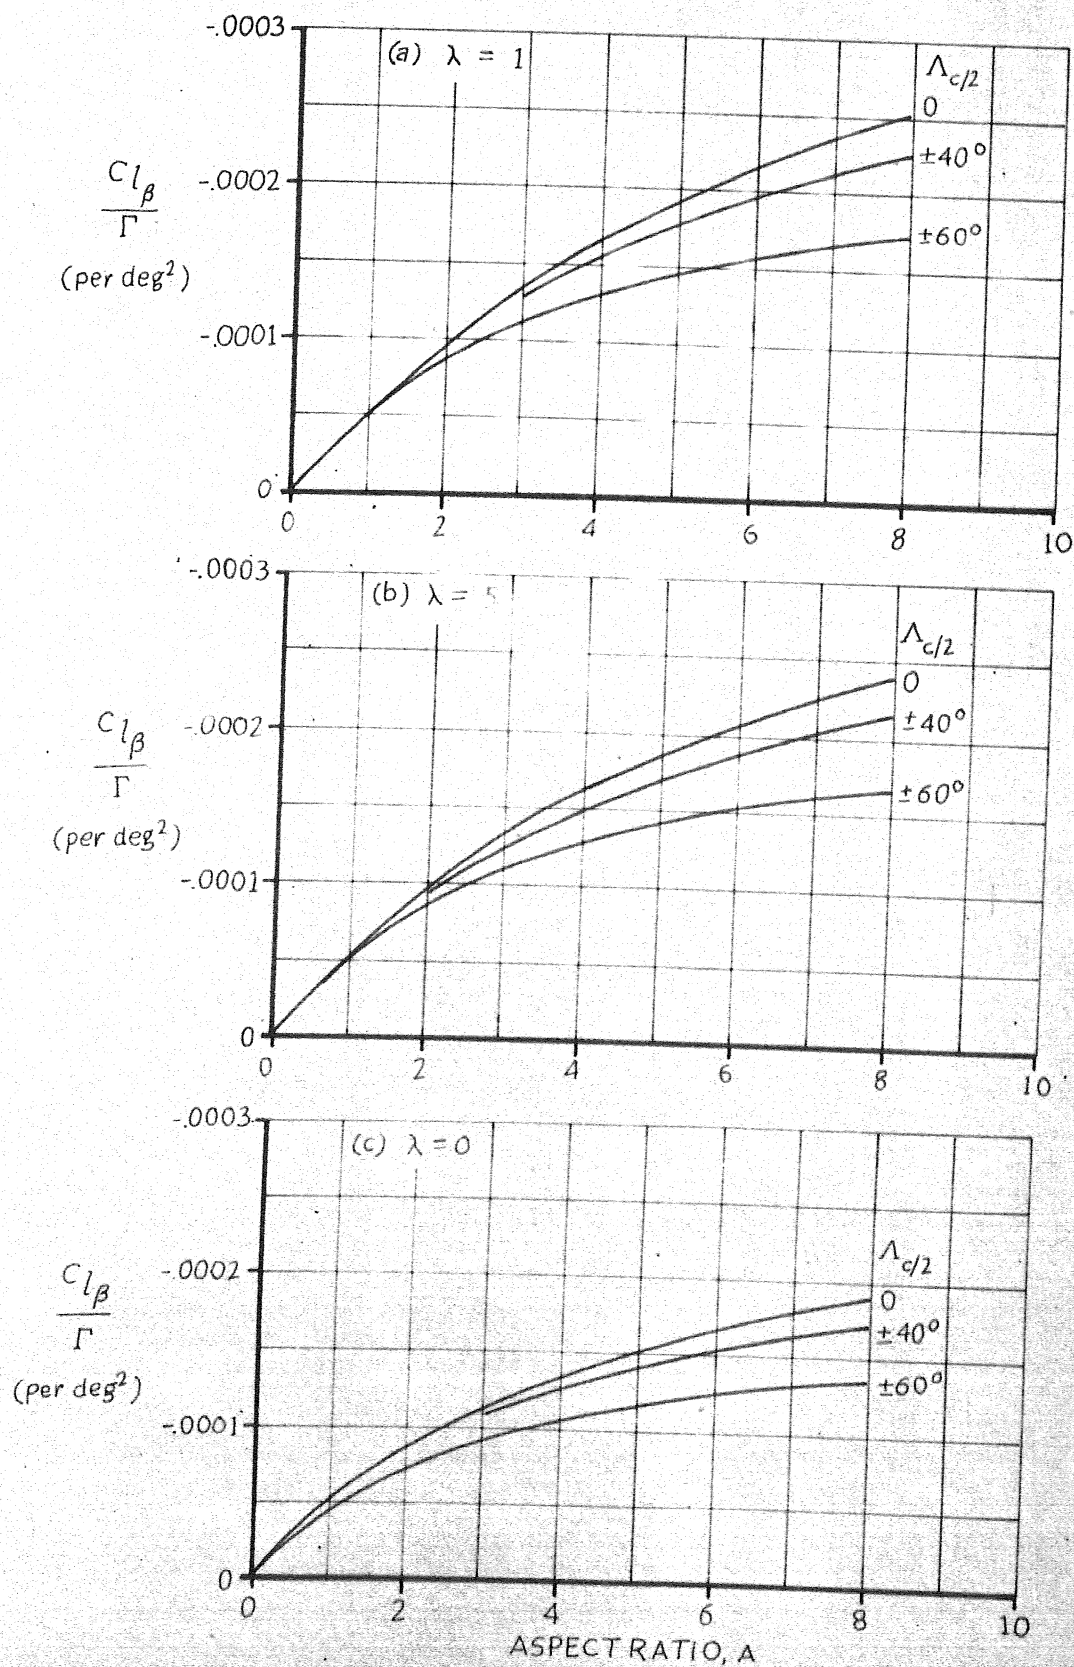


Figure 15. Effect of Uniform Geometric Dihedral on Wing C_{l_β}

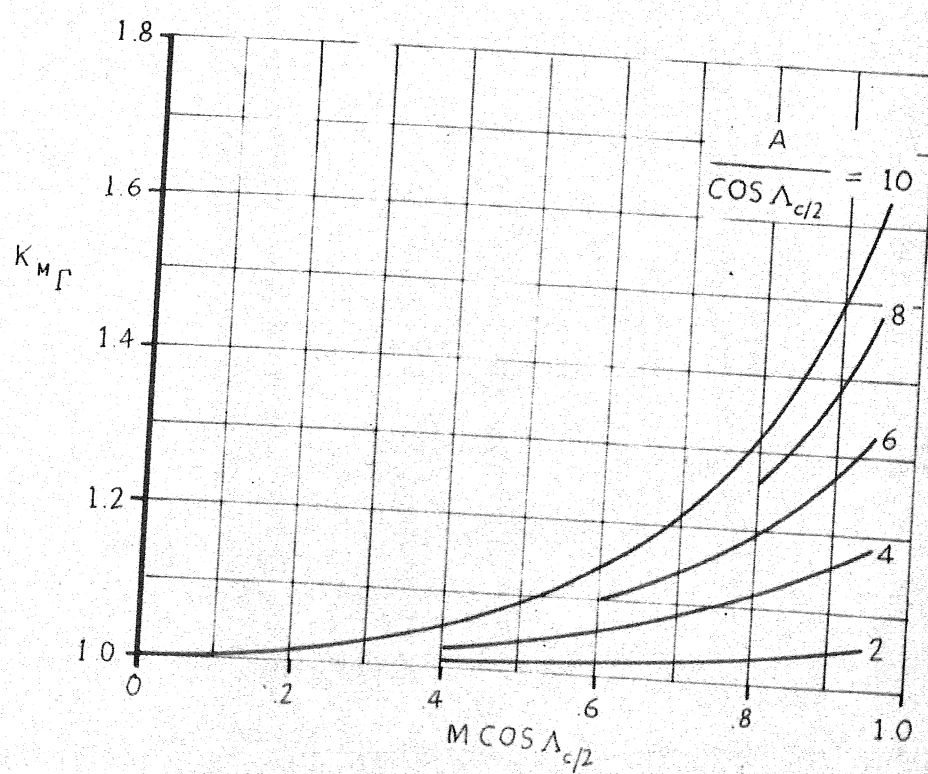


Figure 16. Compressibility Correction to Dihedral Effect on Wing $C_{L\beta}$

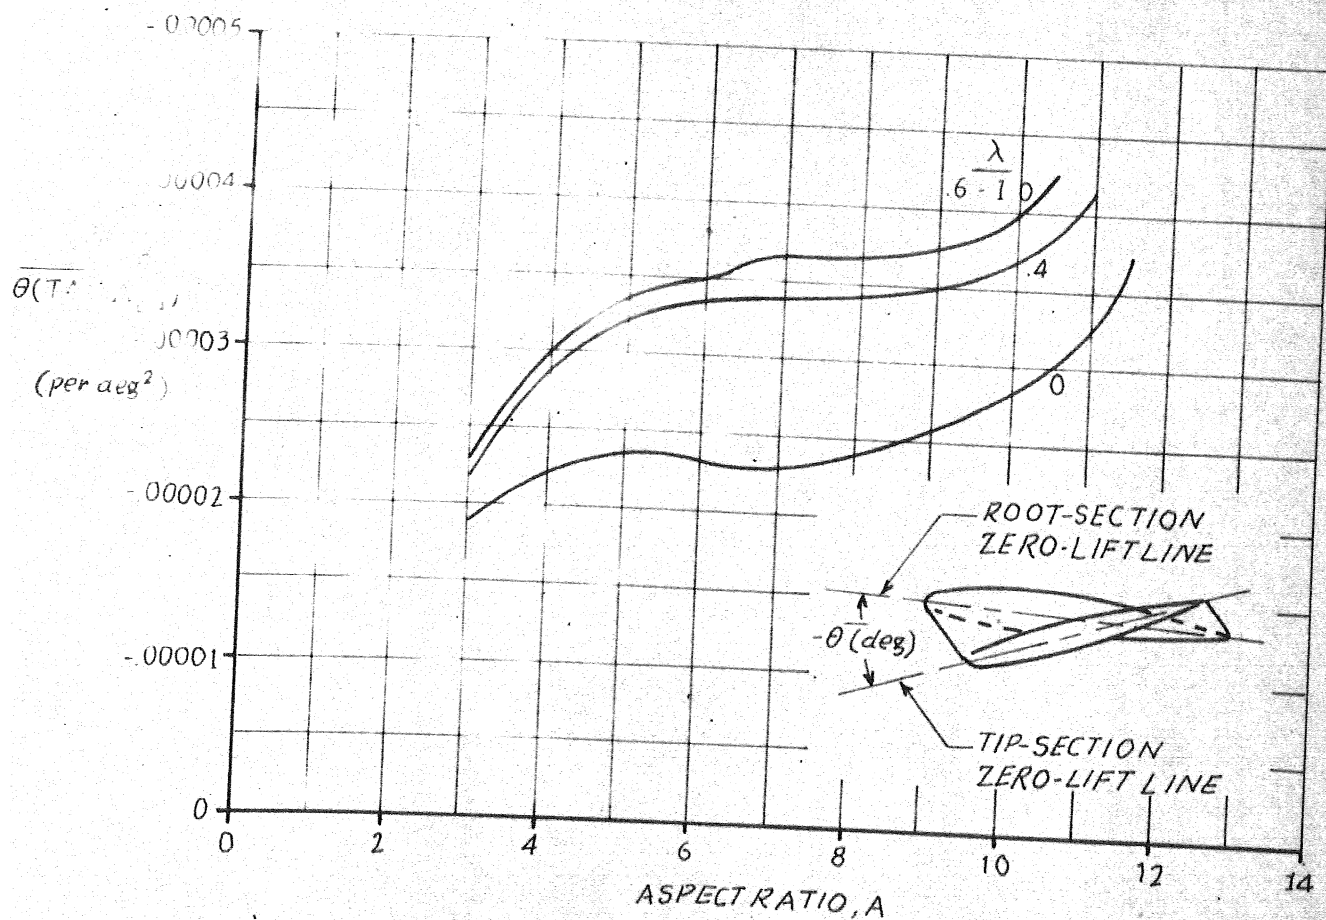


Figure .17. Effect of Wing Twist on Wing $C_{L\beta}$

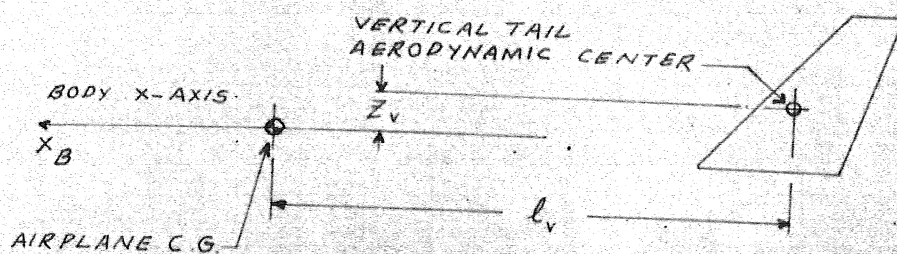


Figure .18. Geometry for Determining the Location of the Vertical Tail Aerodynamic Center in Relation to the Overall Airplane Center of Gravity in Body Axes.

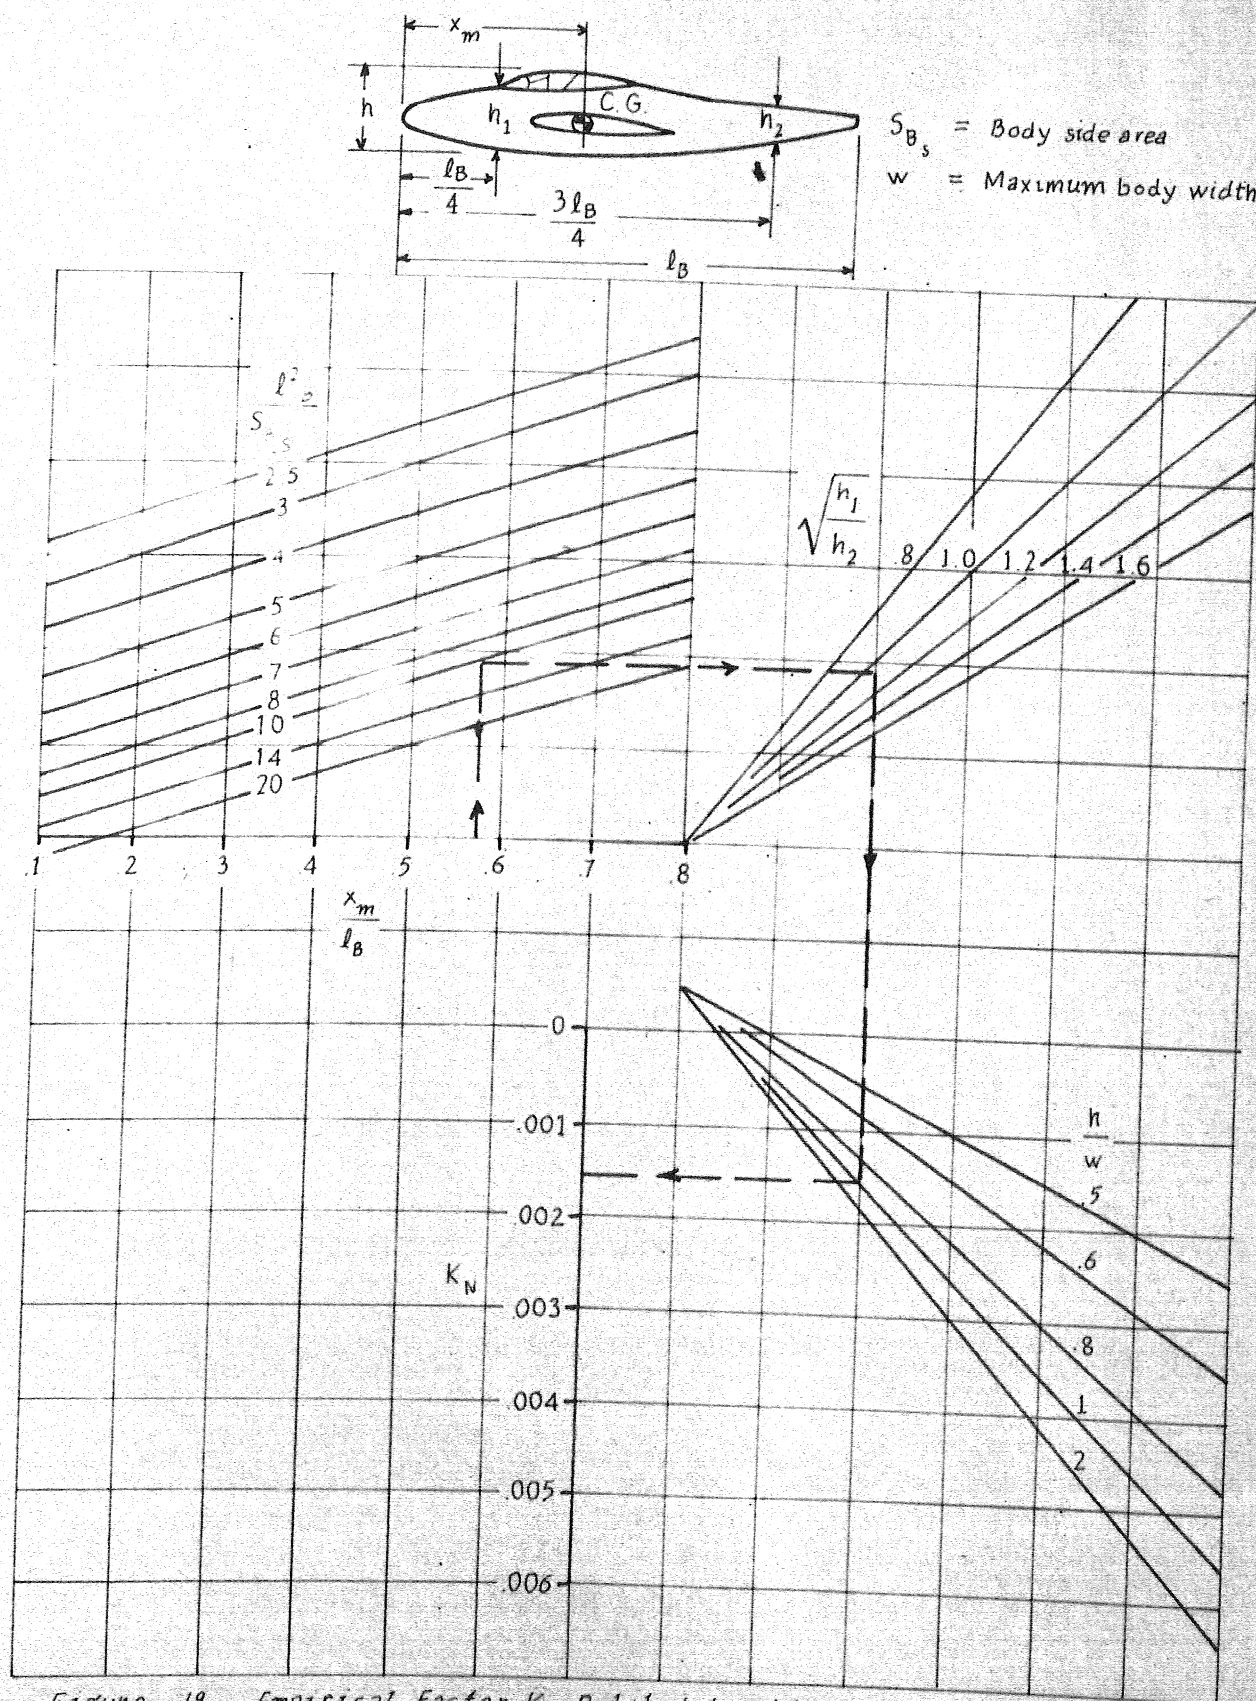
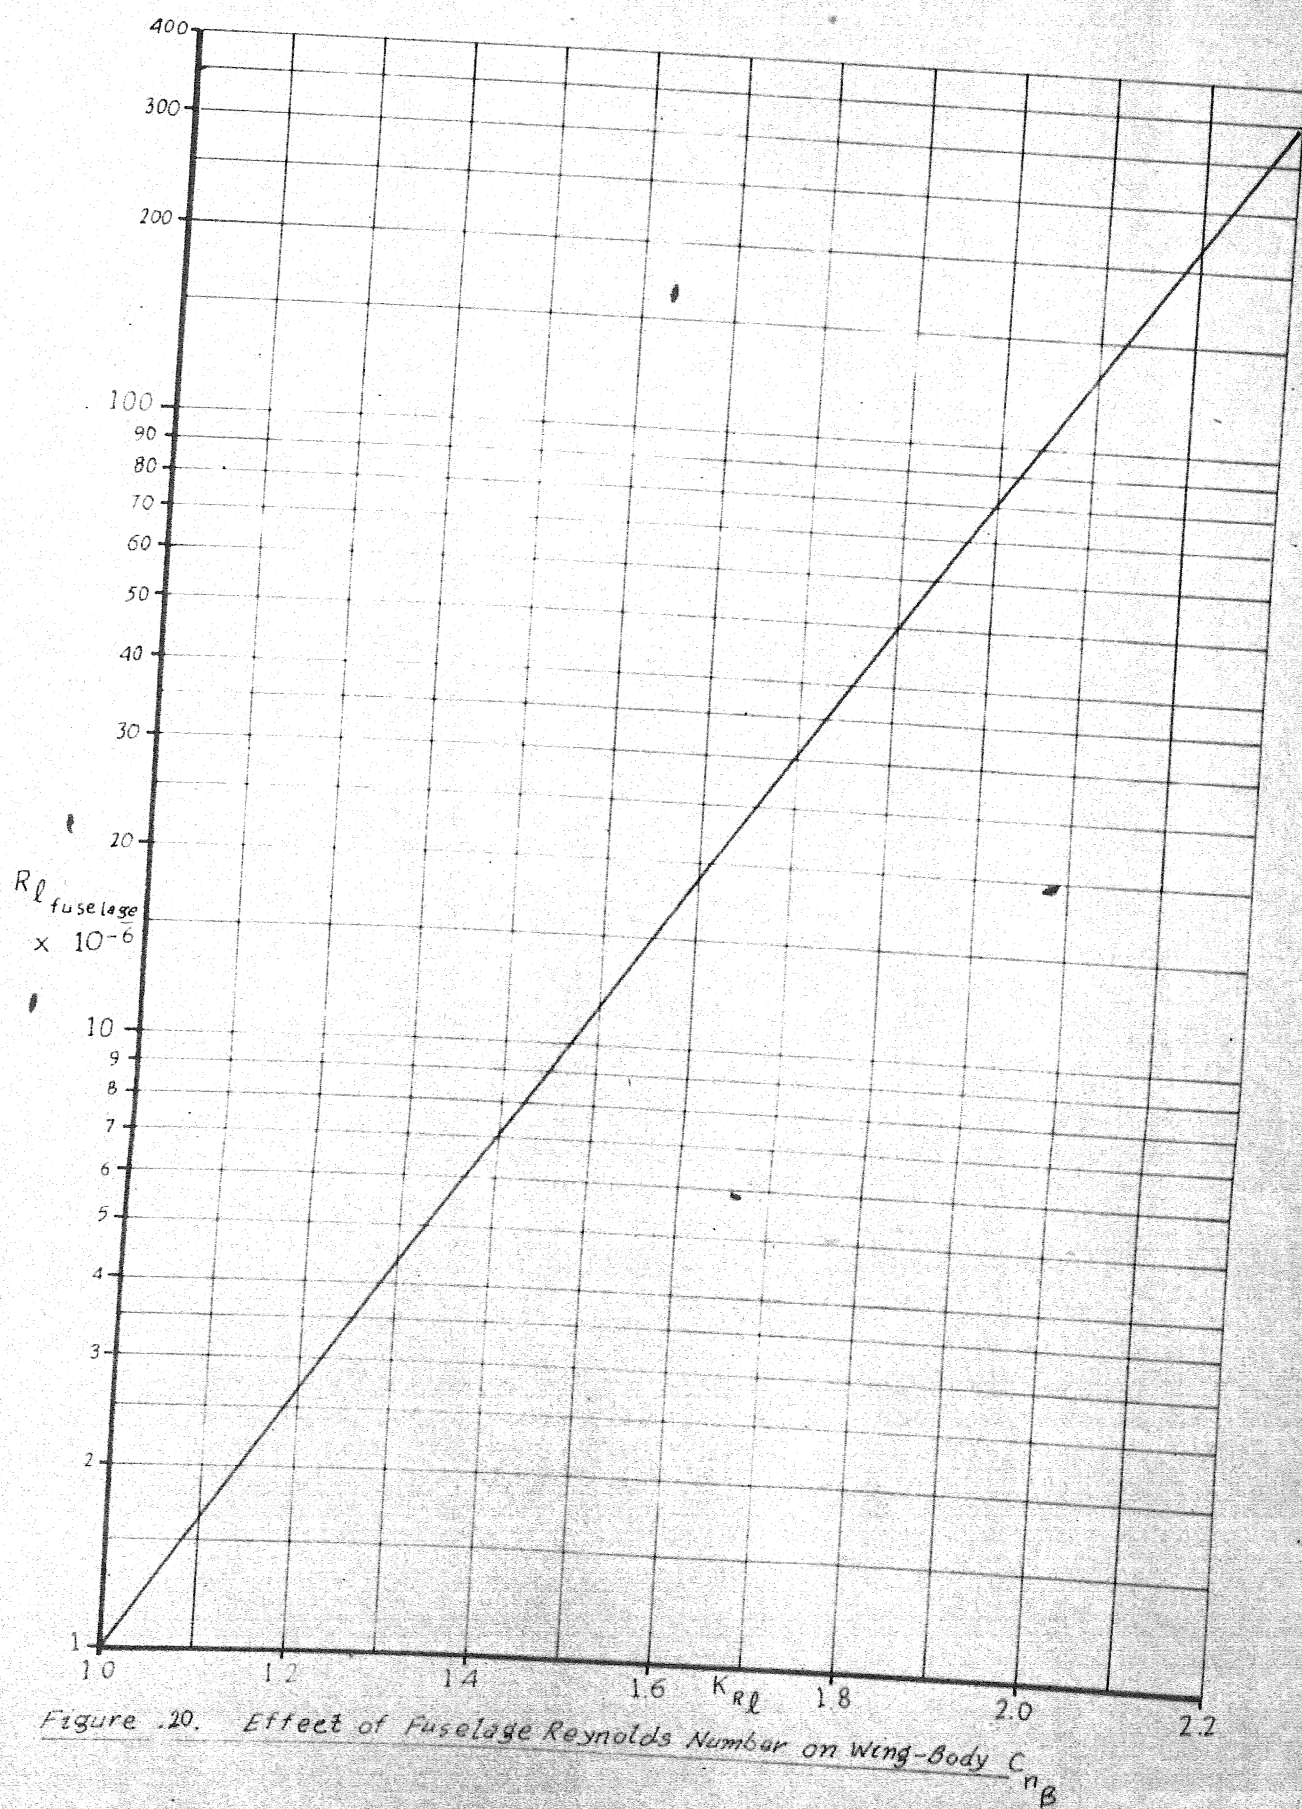


Figure 19. Empirical Factor K_N Related to Sideslip Derivative C_{n_β} for Body + Wing-Body Interference



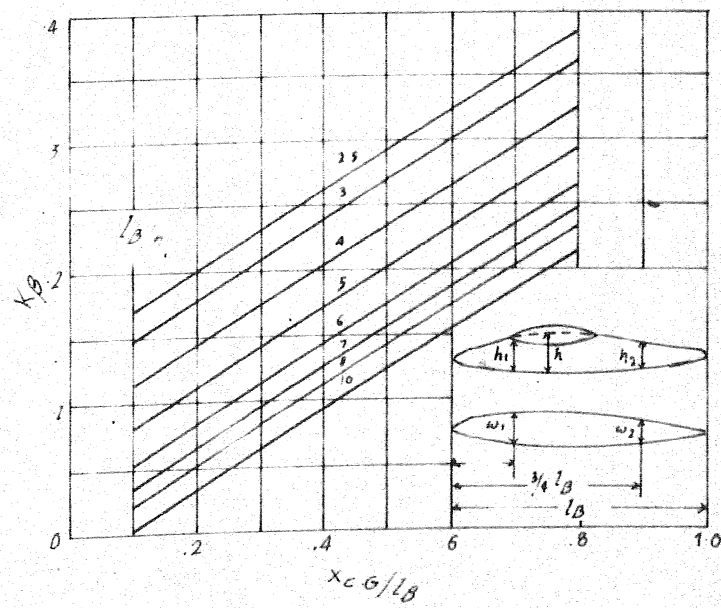


Figure 21. Fuselage Direction: Stability Coefficient

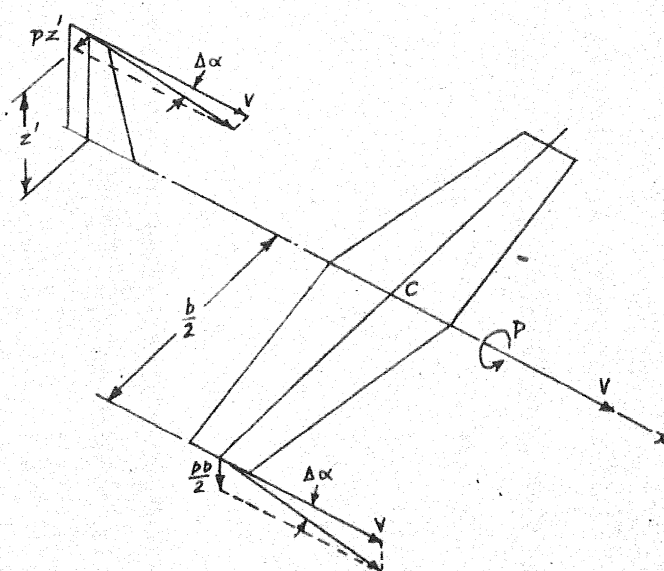


Fig. 22. Angle of Attack Changes due to p

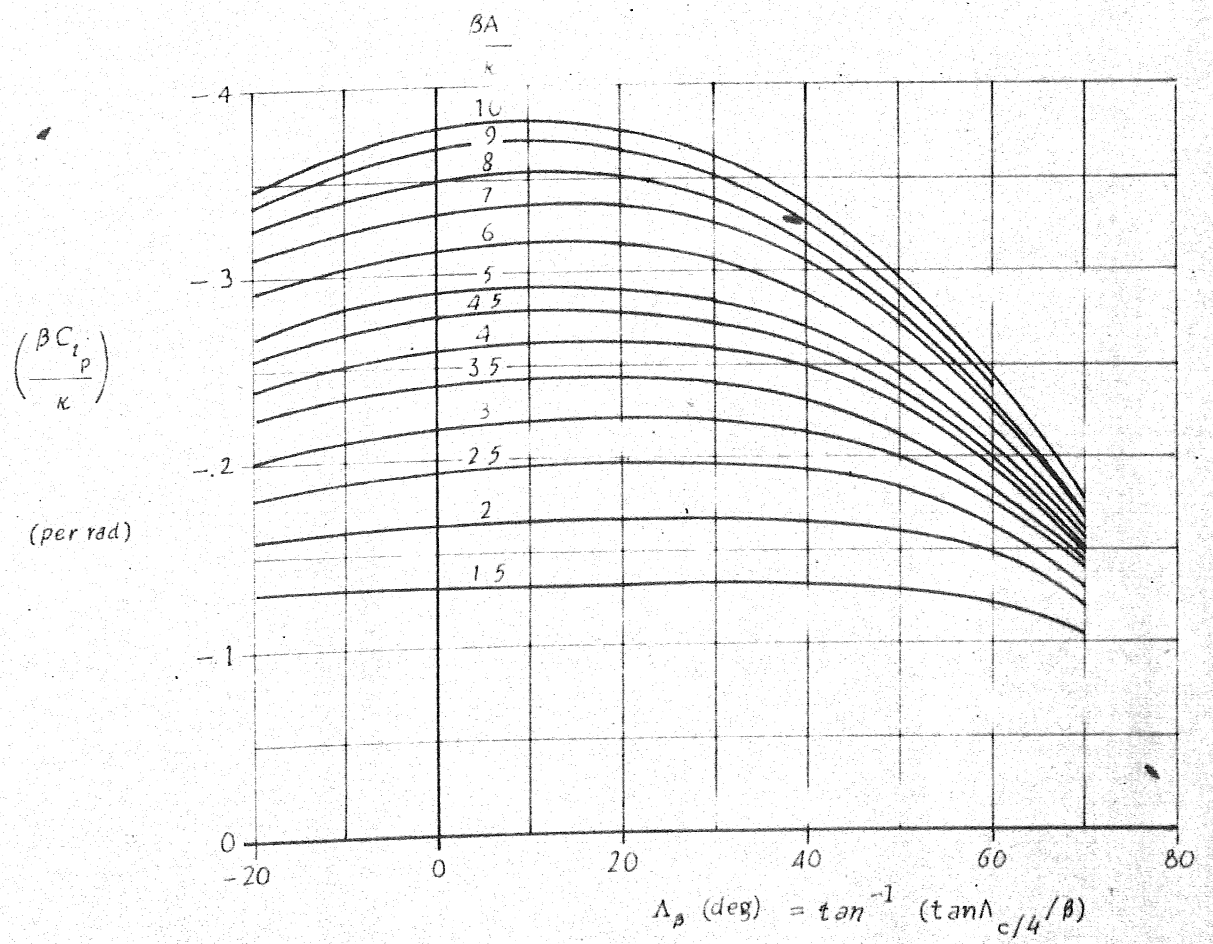
(a) $\lambda = 0$ 

Figure 23a. Roll Damping Parameter

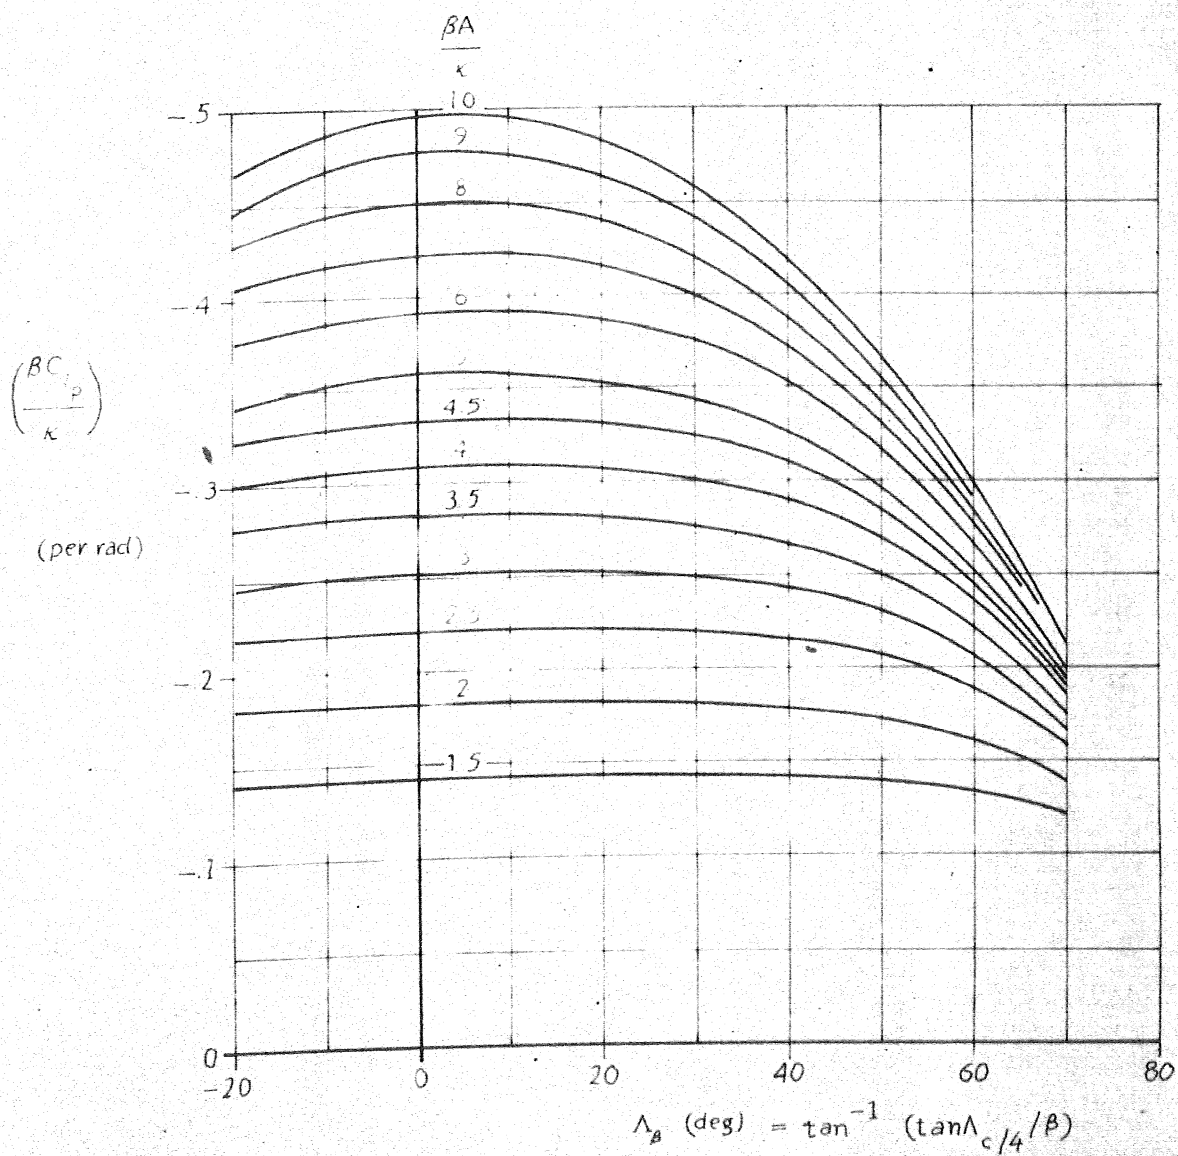
(b) $\lambda = 0.25$ 

Figure 23b. (Continued) Roll Damping Parameter

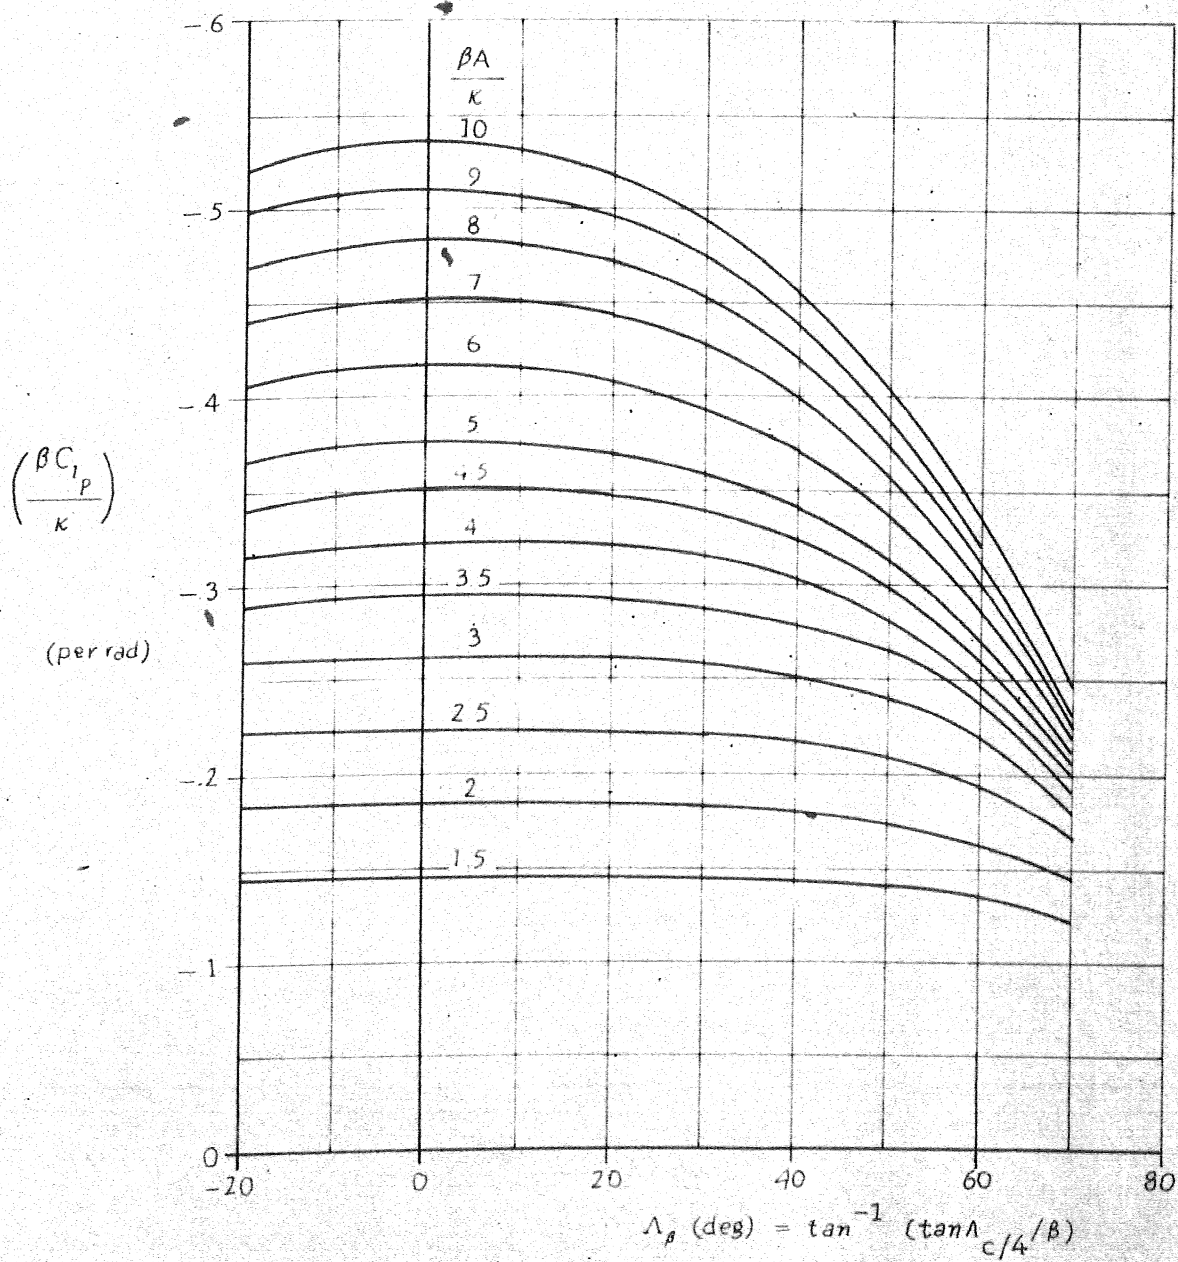
(c) $\lambda = 0.50$ 

Figure 23C. (Continued) Roll Damping Parameter

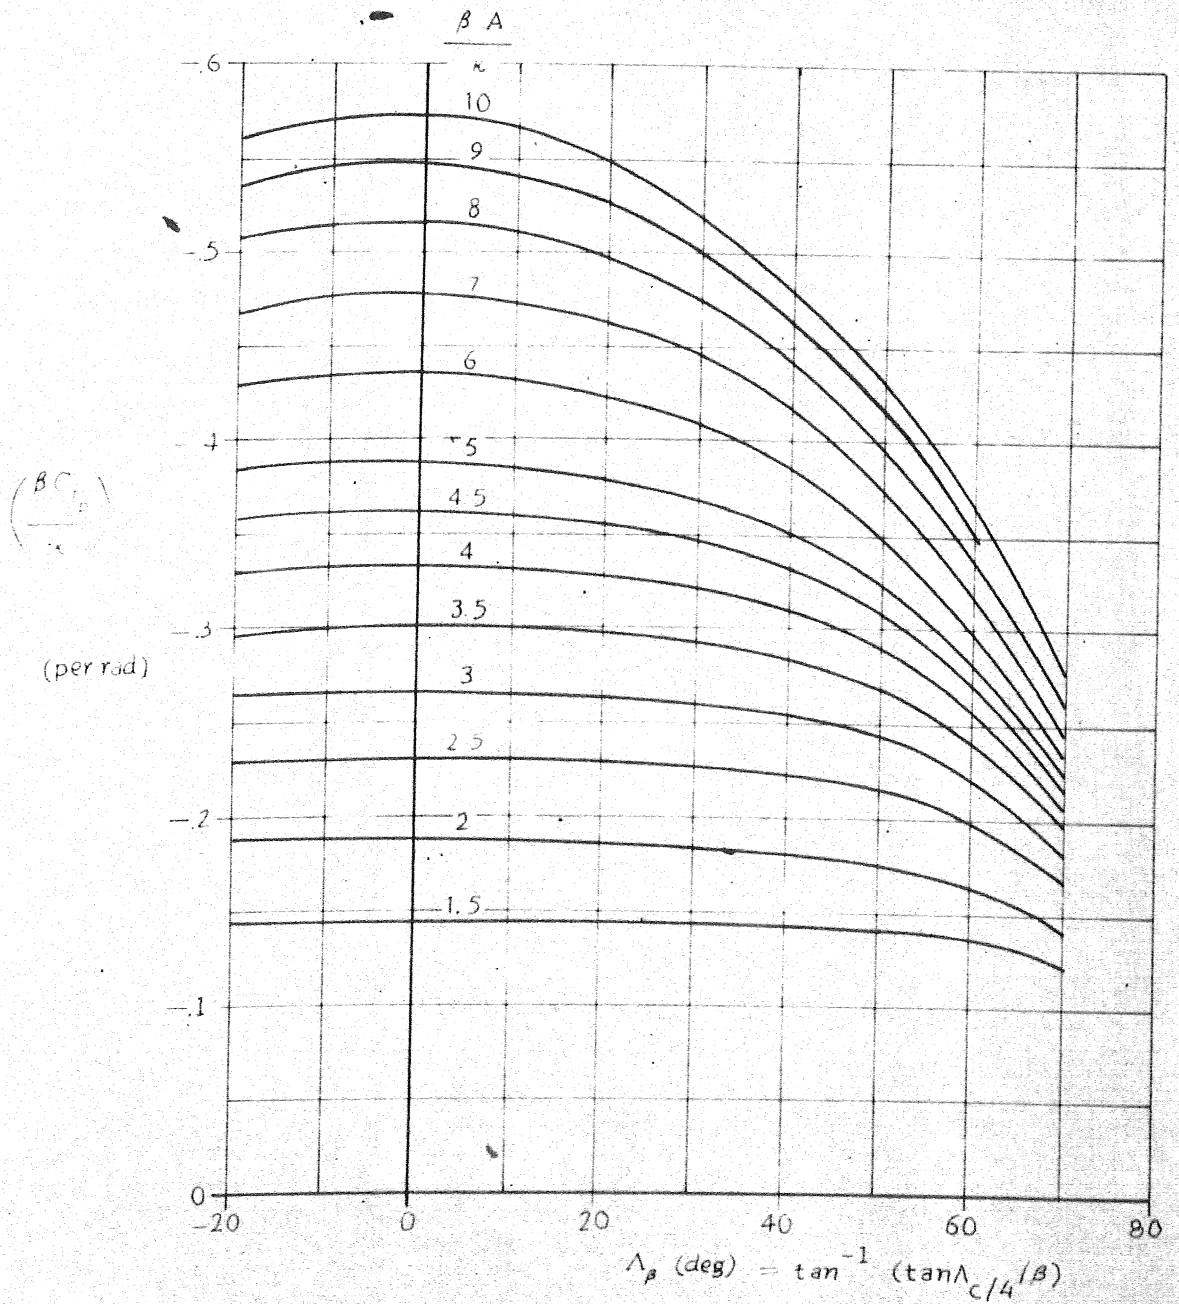
(d) $\lambda = 10$ 

Figure 23d (Continued) Roll Damping Parameter

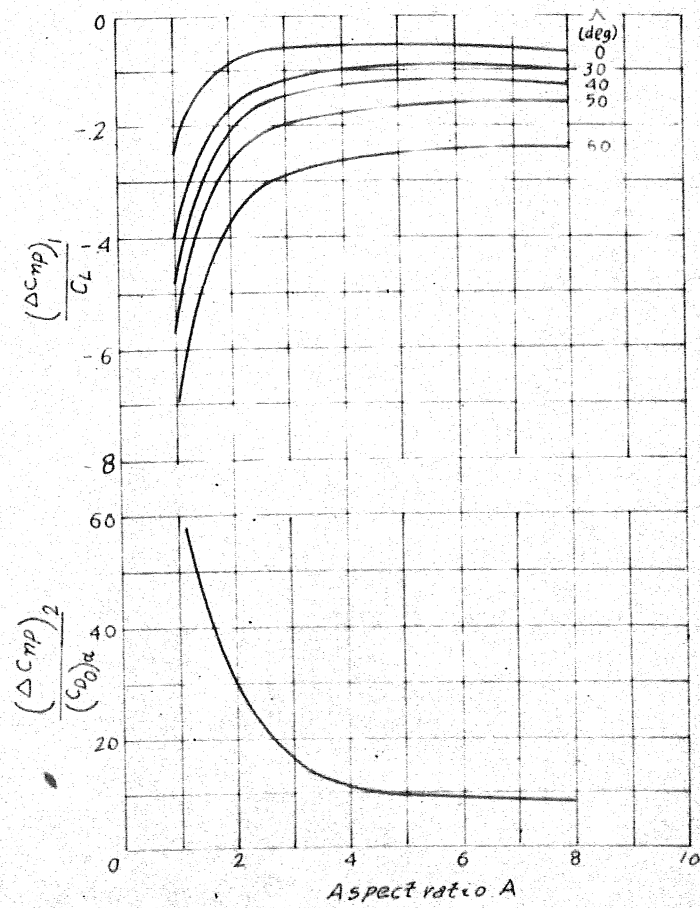


Figure 14 Variation of $\frac{(\Delta C_{mp})_1}{C_L}$ and $\frac{(\Delta C_{mp})_2}{(C_{D_0})_\alpha}$ with Aspect Ratio


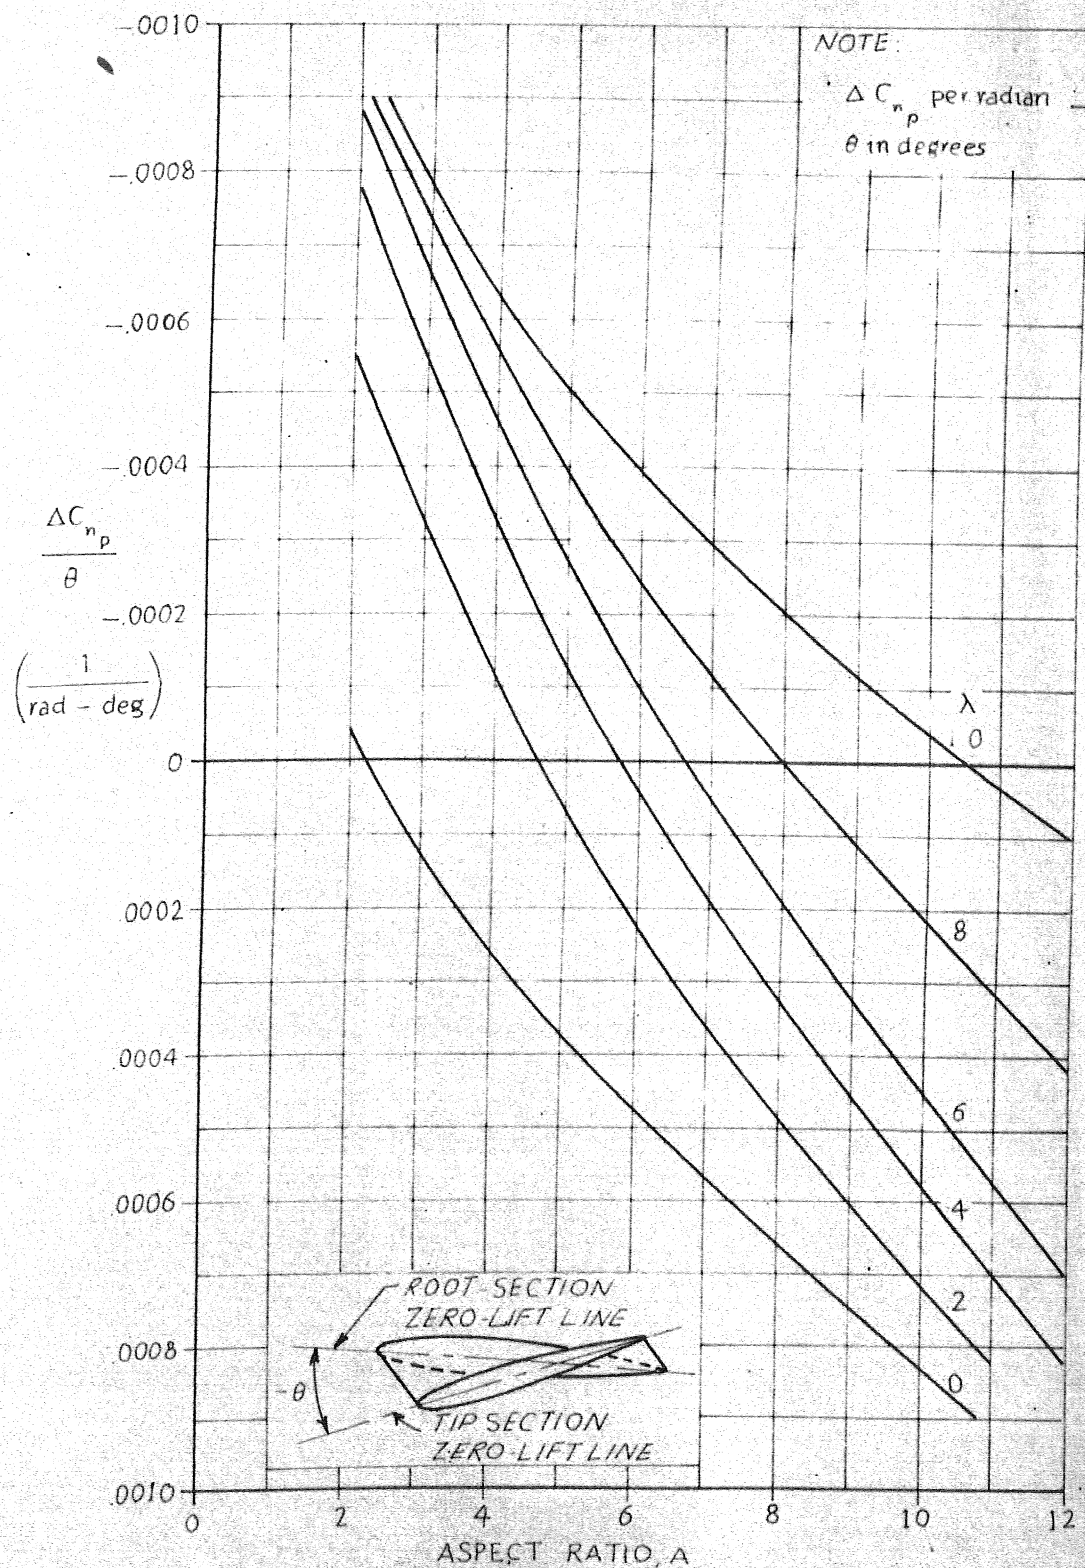


Figure 25. Effect of Wing Twist on Wing Rolling Derivative C_{n_p}

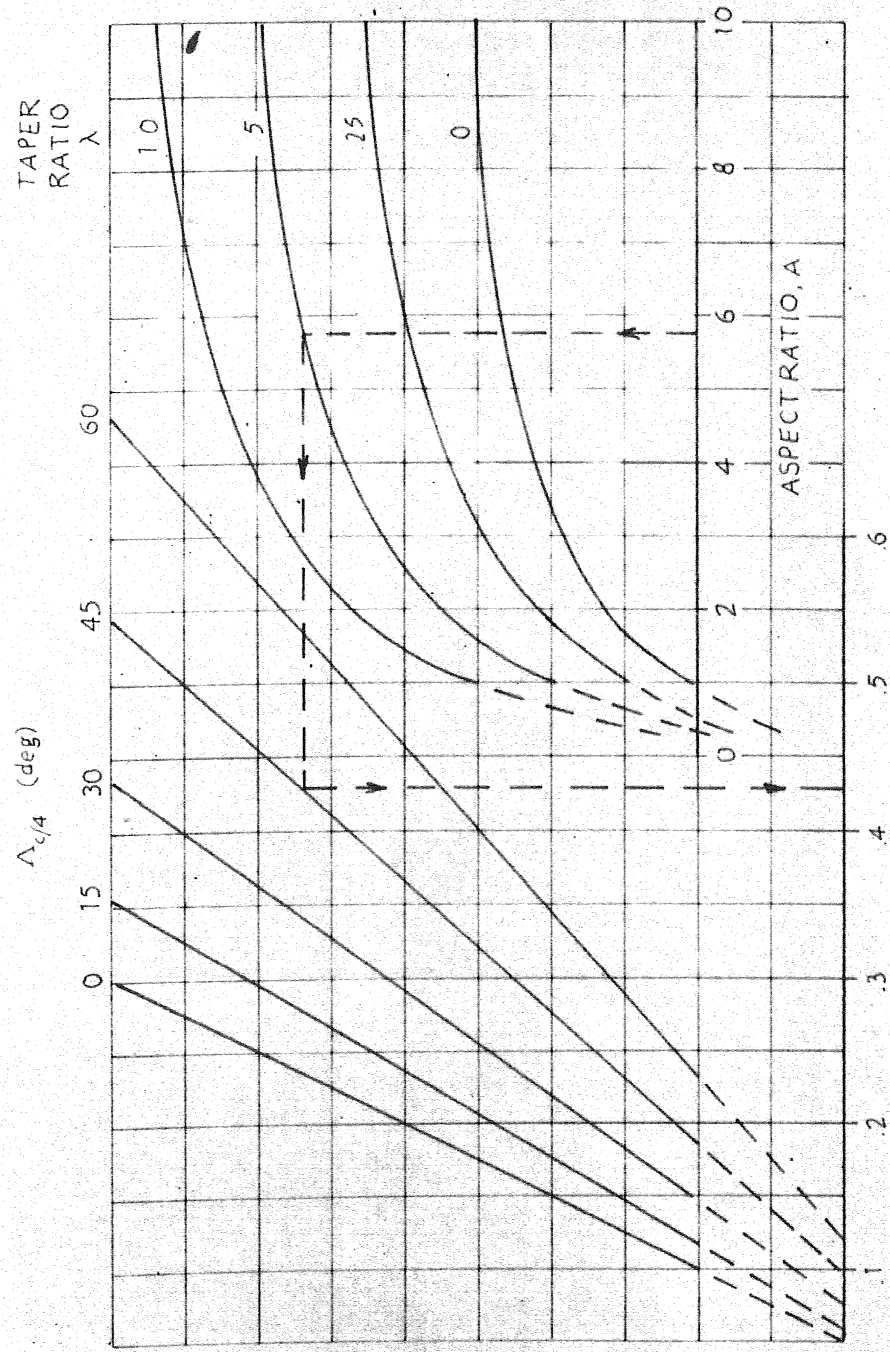

$$\left(\frac{C_{l_r}}{C_{l_r}} \right)_{C_L = 0, M = 0} \quad (\text{per rad})$$

Figure 26. Wing Yawing Derivative C_{l_r}

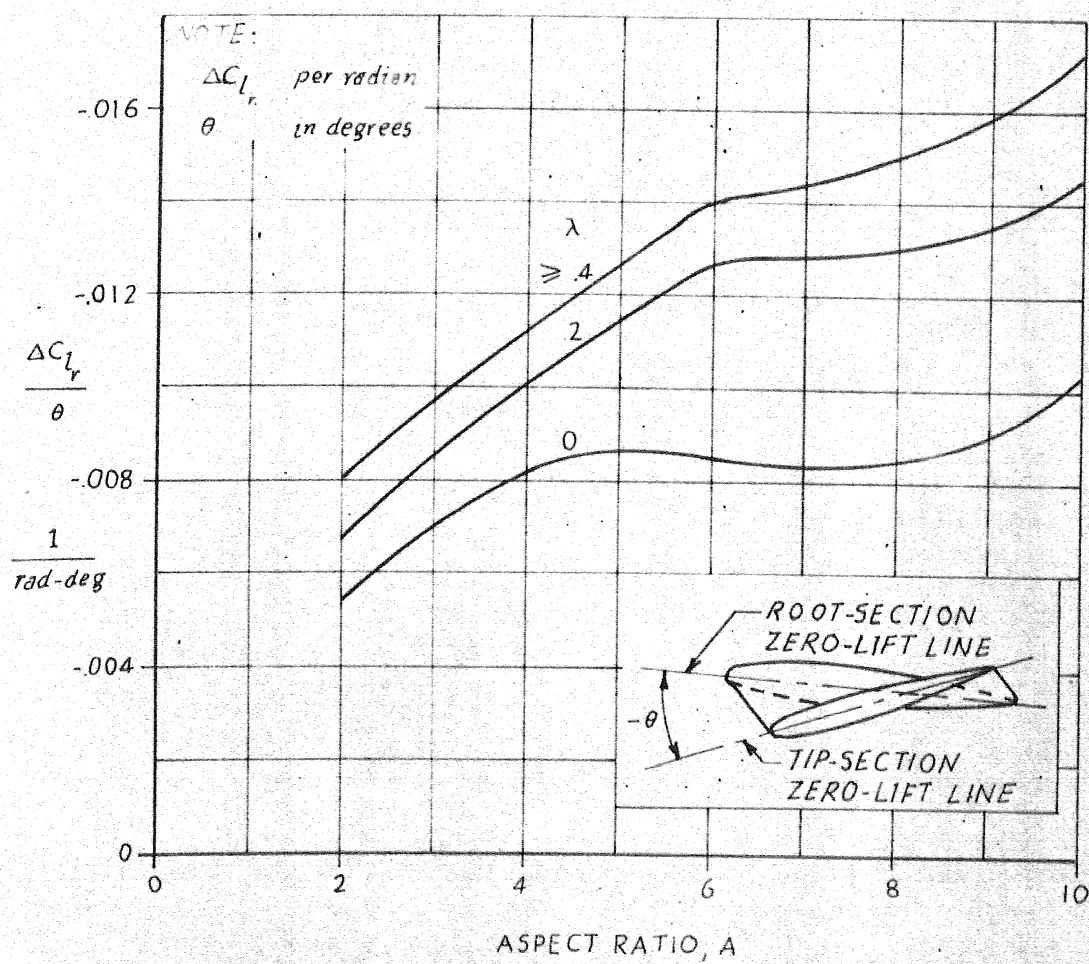


Figure .27. Effect of Wing Twist on Wing Yawing Derivative C_{l_r}


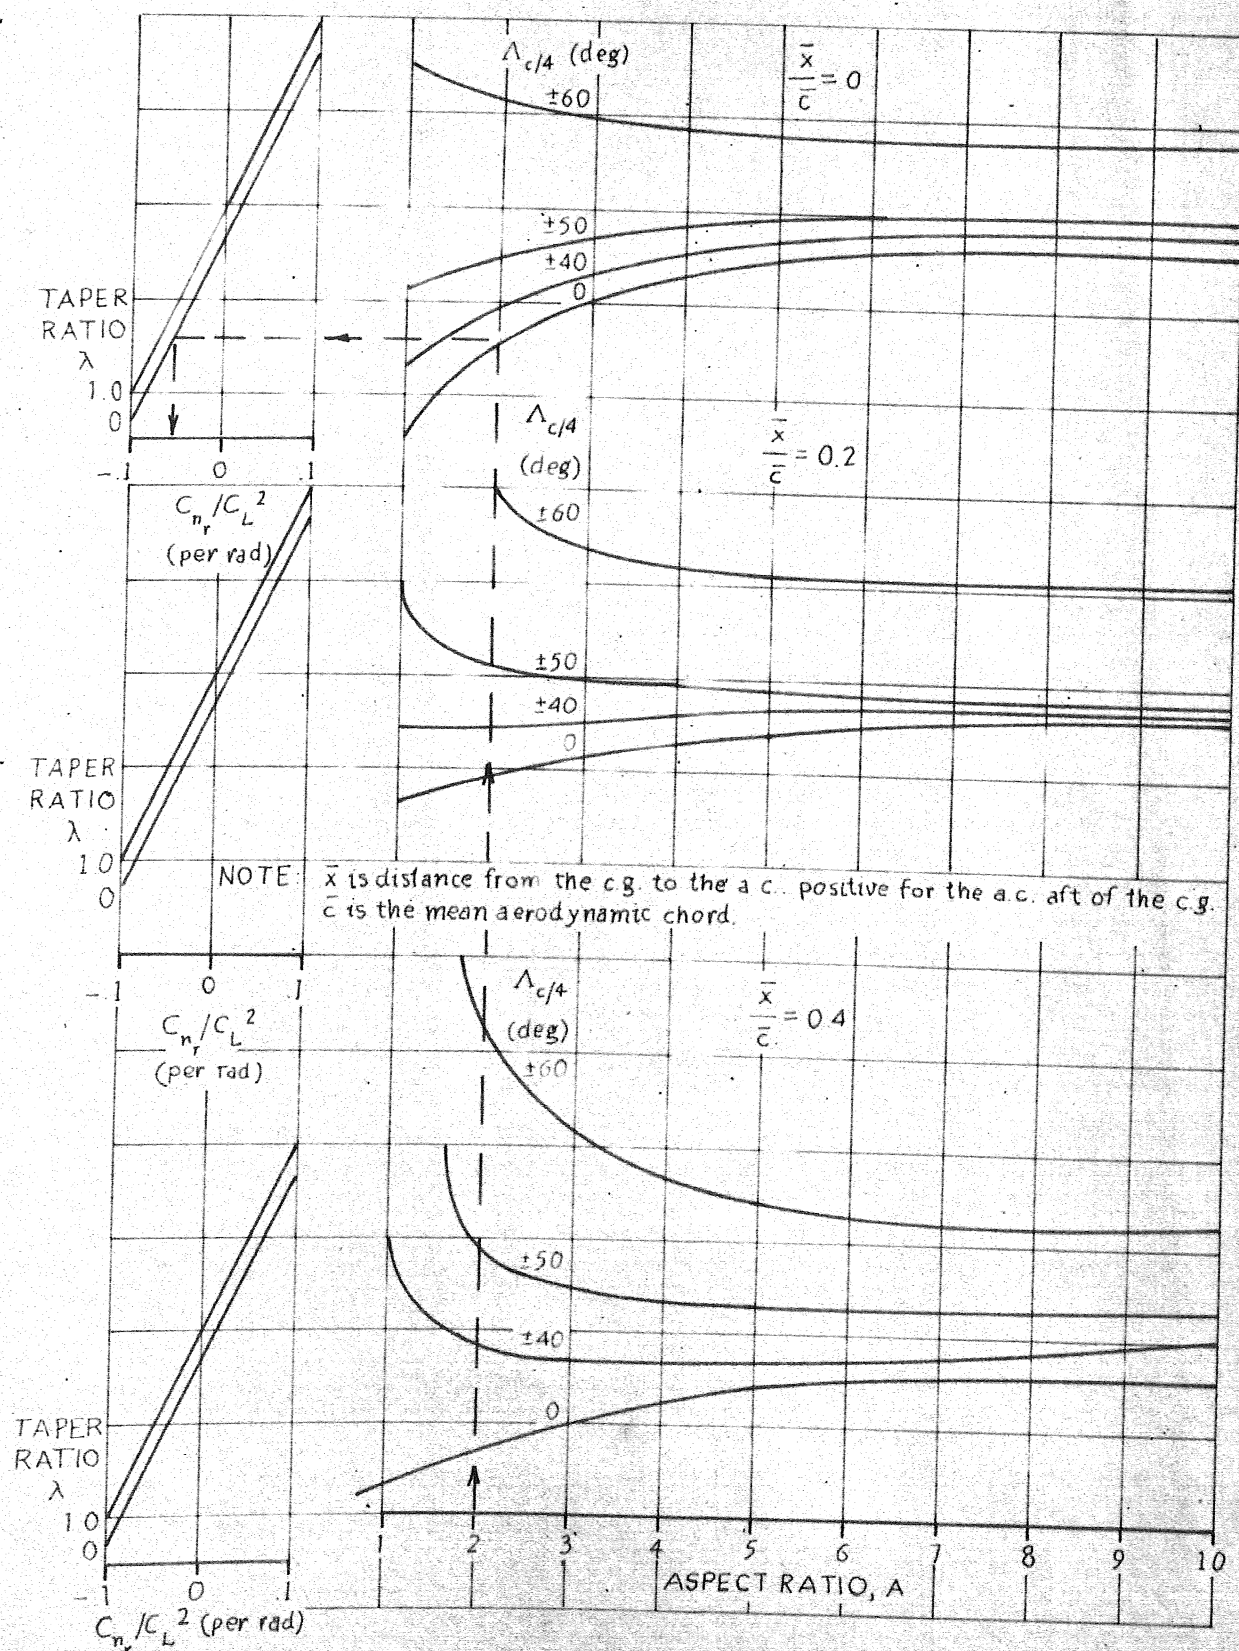


Figure 28. Low Speed Drag-Due-to-Lift Yaw-Damping Parameter

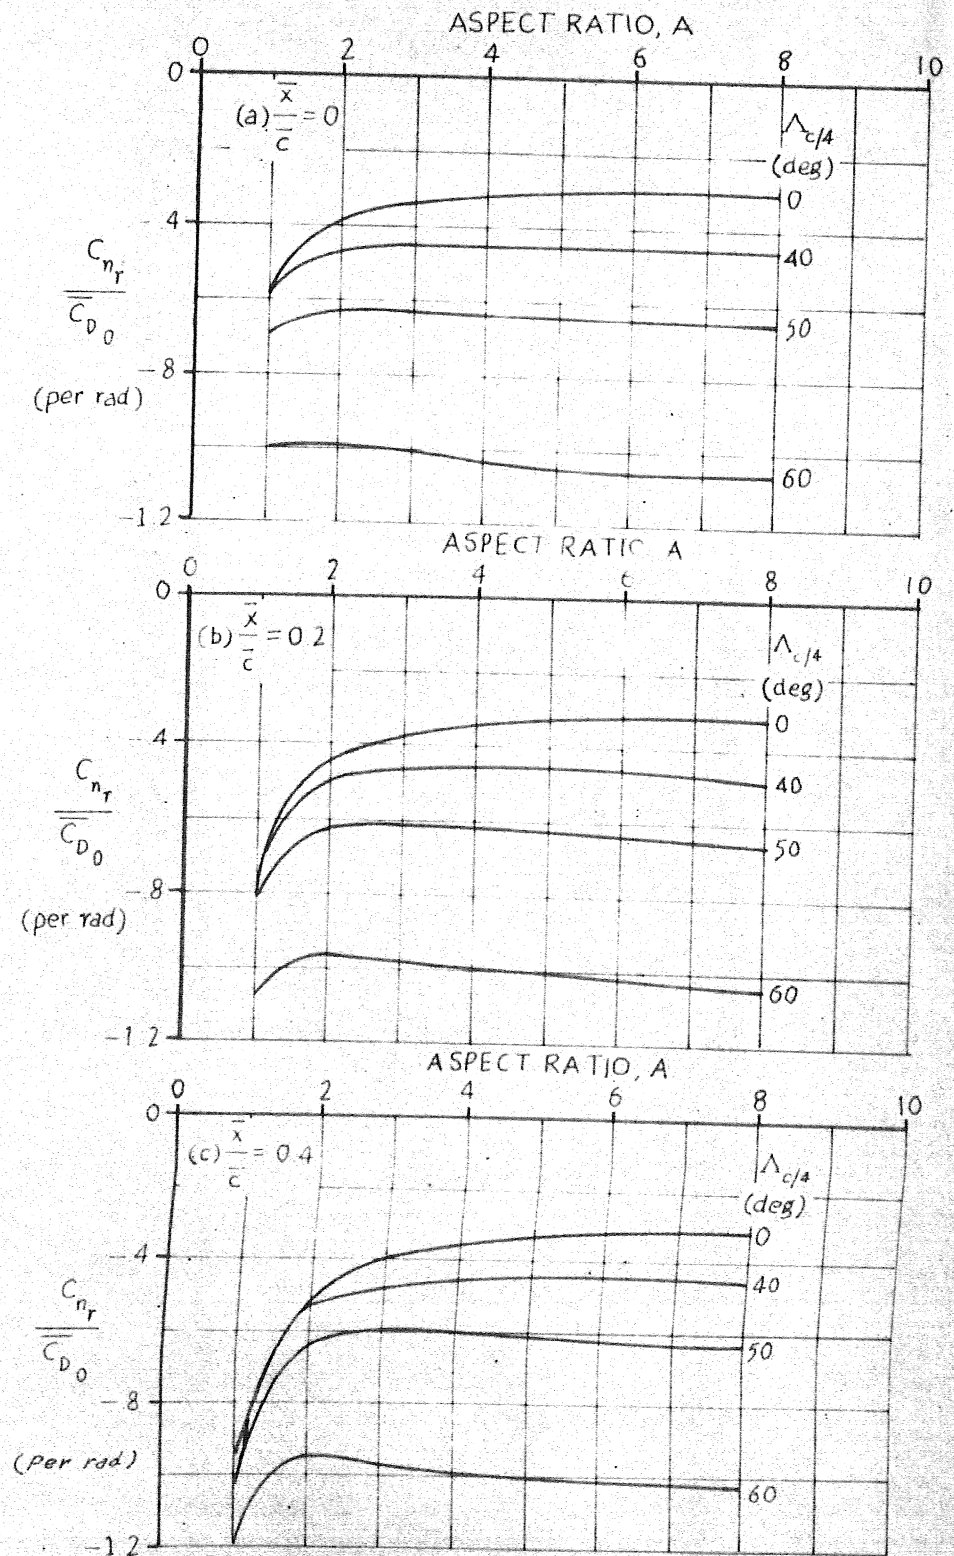

NOTE: \bar{x} is the distance from the c.g. to the a.c., positive for the a.c. aft of the c.g.
 \bar{c} is the wing mean aerodynamic chord.

Figure 29 Low Speed Profile Drag Yaw-Damping Parameter

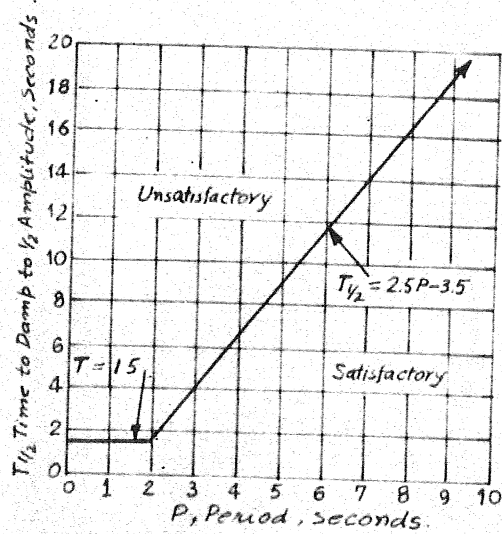


Fig. 30. Required Damping of the Lateral-Directional Oscillation.